




BYD ATTO 2

OWNER'S MANUAL

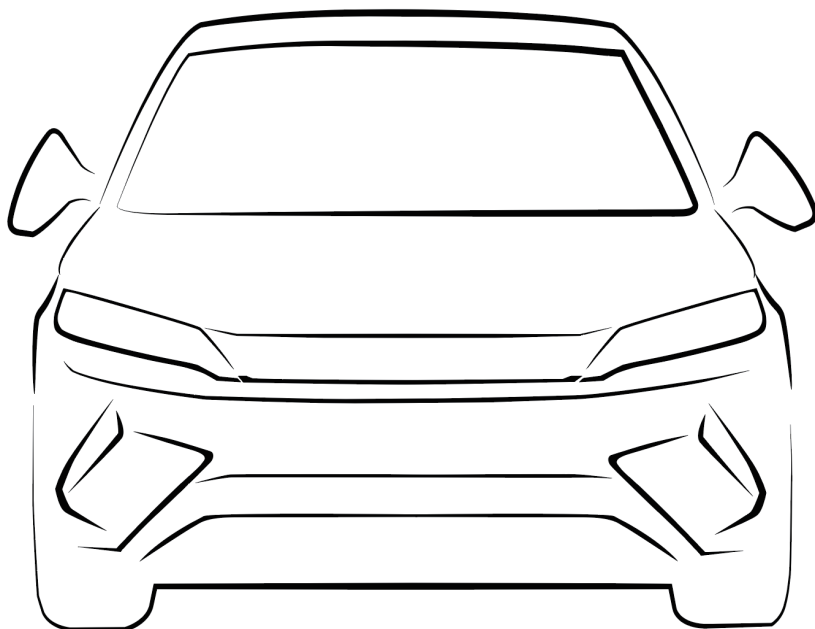

Foreword

Thank you for choosing BYD. To better use and maintain the vehicle, please read this manual carefully and keep it for future reference.

Special instructions: BYD recommends that you choose genuine spare parts and use, maintain, and repair the vehicle in accordance with this manual. The use of non-genuine spare parts to replace or modify the vehicle will affect the performance of the entire vehicle, especially its safety and durability. Vehicle damage and performance issues caused thereby will not be covered by the warranty. In addition, vehicle modifications may also violate national laws and regulations and local government regulations.

Thank you again for choosing BYD. Your valuable comments and suggestions are welcome. To enjoy better services, please provide your accurate contact information. If there is any change to the information, contact a BYD authorised dealer or service provider in a timely manner to update the information in the system. You are also advised to pay attention to the relevant national laws and regulations and local policies, and register the vehicle as soon as possible; otherwise vehicle registration may fail.

The descriptions marked with the asterisk (*) in this manual are specific to only some model configurations, and applicable only when the vehicle has these configurations. If there is any difference with the vehicle you purchased, the configuration of the actual vehicle shall prevail.

Pay attention to the "WARNING", "CAUTION", and "REMINDER" symbols in this manual, and follow the instructions carefully to avoid injury or damage. These symbols are defined as follows:

WARNING


Items that must be observed to ensure personal safety.

CAUTION

Items that must be observed to avoid damage to the vehicle.

REMINDER

Items that must be observed to facilitate maintenance.

 is a safety mark to indicate an operation that should not be performed or an event that should not happen.

This manual is expected to help you use the product correctly, and does not provide any description of the configuration and software version of this product. For details about the product configuration and software version, please refer to the contract (if any) related to this product, or consult the dealer who sold the product to you.

Sustainability

As a pure electric passenger vehicle, BYD ATTO 2 is an environmentally friendly product. Please visit <https://reach.bydeurope.com> for environmental protection information about the vehicle.

Everyone has the responsibility to protect the environment. Please use this vehicle properly and dispose of any waste and cleaning materials according to the corresponding local laws and regulations.

Contact Us

If you require assistance or clarification on policies or procedures, please contact the customer service centre.

E-mail: Autoservice.contact@byd.com

Call 00800-10203000 for 24/7 roadside assistance or customer service centre (9:00-18:00 Monday-Saturday).

Copyright © BYD Auto Co., Ltd. All rights reserved.

Copyright © BYD Auto Industry Co., Ltd. All rights reserved.

No part of this document may be reproduced, copied, stored, translated, or transmitted electronically or in any other form without prior written consent and authorisation of BYD Auto Industry Co., Ltd and BYD Auto Co., Ltd.

All rights reserved

Figure Index

Exterior.....	7
Dashboard.....	8
Centre Console.....	9
Doors.....	10

Safety

Seat Belts.....	12
Seat Belt Overview.....	12
Using Seat Belts.....	12
Airbags.....	14
Airbag Overview.....	14
Airbag Types.....	16
Airbag Triggering Conditions and Precautions.....	17
Child Restraint System.....	21
Child Restraint System.....	21
Anti-theft Alarm System.....	25
Anti-theft Alarm System.....	25
Data Collection and Processing.....	25
Data Collection and Processing.....	25

Instrument Cluster

Instrument Cluster.....	30
Instrument Cluster View.....	30
Instrument Cluster Indicators.....	31

Controller Operation

Doors and Keys.....	42
Keys.....	42
Locking/Unlocking Doors.....	47
Smart Access and Start System.....	52

Child Protection Lock.....	53
Seats.....	54
Seat Precautions.....	54
Adjusting Front Seats.....	55
Folding Rear Seats.....	56
Head Supports.....	56
Steering Wheel.....	57
Steering Wheel Switches.....	57
Adjusting the Steering Wheel.....	60
Wipers.....	60
Wiper Switch.....	60
Wipers.....	62
Side Mirrors.....	63
Interior Rearview Mirror.....	63
Side Mirrors.....	64
Switches.....	65
Light Switches.....	65
Driver's Door Switches.....	66
Window Control Switch on Passenger's Side.....	68
Mode Switches.....	68
Front Passenger Airbag Switch.....	69
Hazard Warning Light Switch.....	70
Emergency Call (E-Call).....	70
Panoramic Canopy*.....	71
Interior Light Switch.....	72

Using and Driving

Charging/Discharging Instructions....	74
Charging Instructions.....	74
Charging.....	78
Discharging Device.....	85
Charging Port Immobiliser System.....	86
Driving Range Display*.....	87

Regenerative Braking Intensity Settings.....	88
Batteries.....	88
High-Voltage Battery.....	88
Low-Voltage Battery.....	91
Usage Precautions.....	93
Break-in Period.....	93
Trailer Towing*.....	94
Driving Safety Precautions.....	95
Vehicle Use Suggestions.....	95
Saving Energy and Extending Vehicle Service Life.....	96
Carrying Luggage.....	97
Wading into Water.....	98
Fire Prevention.....	99
Starting and Driving.....	100
Starting the Vehicle.....	100
Driving.....	102
Gear Shift Controls.....	103
Electronic Parking Brake (EPB).....	104
Automatic Vehicle Hold (AVH).....	106
Driving Precautions.....	107
Driver Assistance.....	110
Adaptive Cruise Control (ACC).....	110
Intelligent Cruise Control (ICC).....	114
Forward Collision Warning (FCW) and Automatic Emergency Braking (AEB).....	116
Traffic Sign Recognition (TSR).....	119
Intelligent Speed Limit Control (ISLC)..	119
Intelligent High Beam Control (IHBC)..	120
Lane Departure Assist (LDA).....	121
Emergency Lane Keeping Assist (ELKA).....	123
Blind Spot Assist (BSA).....	125
Driver Monitoring Systems (DMS).....	127

Direct Tyre Pressure Monitoring System (TPMS).....	128
Acoustic Vehicle Alert System (AVAS)...	129
Around View Monitor (AVM).....	130
Parking Assistance.....	131
Driving Safety Systems.....	135

In-Vehicle Devices

Infotainment System.....	142
Infotainment Touchscreen.....	142
Navigation Bar.....	143
Gestures and Responses.....	143
OTA Upgrade*.....	143
BYD Assistant.....	144
Bluetooth call.....	144
File Management.....	144
Phone Projection*.....	145
A/C System.....	146
A/C Panel.....	146
A/C Operation Interface.....	147
Function Definition.....	147
A/C Settings.....	150
A/C Vents.....	150
BYD App*.....	151
About BYD App*.....	151
Account Registration*.....	151
Vehicle Condition and Control*.....	151
Individual Center and Vehicle Management*.....	152
Storage.....	152
Door Bins.....	152
Glove Box.....	152
Center Console Cubby.....	152
Seatback Pockets.....	153
Cup Holders.....	153

Other Devices.....	153
Sun Visor.....	153
Grab Handles.....	154
USB Ports.....	154
SD Card Slot.....	154
12 V Auxiliary Power.....	155
Wireless Phone Charger*.....	155
Cargo Cover*.....	157

Maintenance

Maintenance Precautions.....	160
Maintenance Cycle and Items.....	160
Regular Maintenance.....	162
Regular Maintenance.....	162
Vehicle Corrosion Prevention.....	163
Paint Maintenance Tips.....	163
Vehicle Cleaning.....	164
Interior Cleaning.....	165
Self-Maintenance.....	167
Self-Maintenance.....	167
Vehicle Storage.....	169
Bonnet.....	169
Cooling System.....	170
Braking System.....	171
Windscreen Washer.....	171
A/C System.....	171
Wiper Blades.....	172
Tyres.....	173
Fuses.....	175

When Faults Occur

When Faults Occur.....	178
Reflective Vest.....	178

If Smart Key Battery Is Exhausted.....	178
Emergency Shutdown System.....	178
If a Collision Occurs.....	179
If the High-Voltage Battery Leaks.....	179
If a Fire Occurs.....	180
If the Vehicle Needs Towing.....	180
If a Tyre Goes Flat.....	182

Technical Data


Vehicle Data.....	188
Specifications.....	188
Vehicle Identification.....	192
Information.....	193
Warning Labels.....	193
Transponder Mounting.....	195
Declarations of Conformity.....	195
Declarations of Conformity.....	196

Abbreviations

Abbreviations.....	204
---------------------------	------------

Figure Index

Exterior

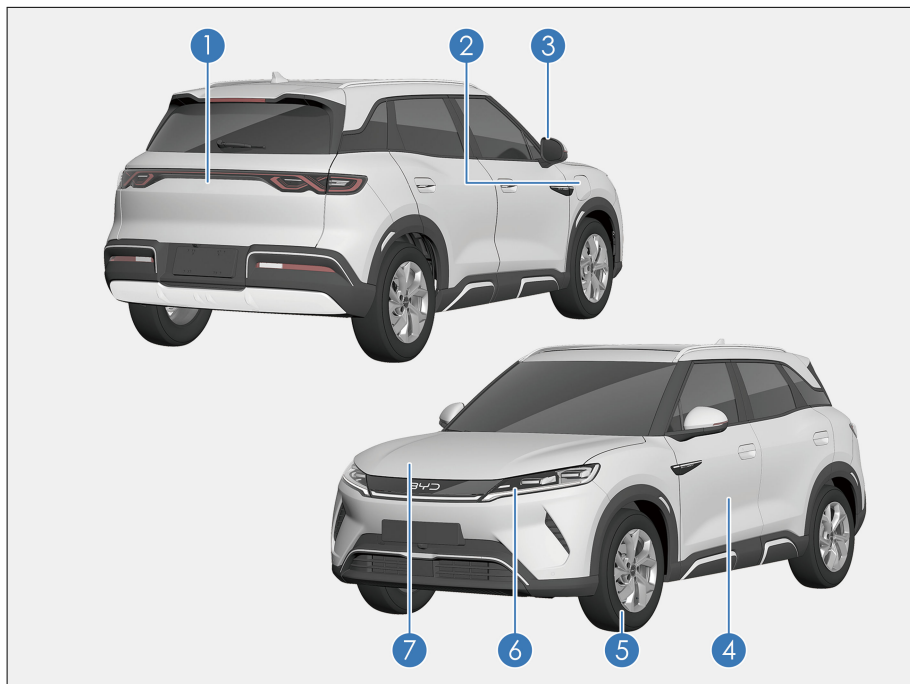

1 Trunk **P50**

2 Using Mode 2 Charging Cable **P78**

Using AC Charging Piles* **P81**

Using DC Chargers **P82**

3 Side Mirror Switches **P64**

4 Doors **P47**

5 Tyre **P173**

If a Tyre Goes Flat **P182**

6 Combination Light **P65**


7 Opening the Hood **P169**

Coolant **P170**

Brake Fluid **P171**


Washer **P171**

Dashboard

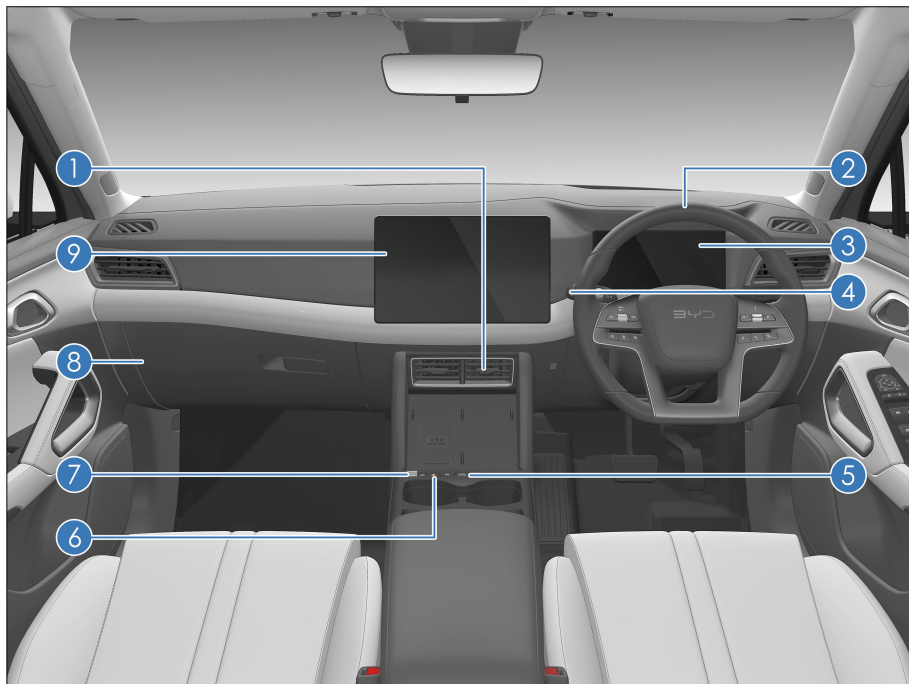

- | | | | |
|---|---|---|--|
| 1 | Front vents P150 | 5 | START/STOP Button P100 |
| 2 | Steering Wheel Switches P57
Adjusting the Steering Wheel P60 | 6 | Hazard Warning Light Switch P70 |
| 3 | Instrument Cluster P30 | 7 | Mode Switches P68 |
| 4 | Light Switches P65
Wiper Switch P60 | 8 | Glove Box P152 |
| | | 9 | Infotainment Touchscreen P142 |

Center Console

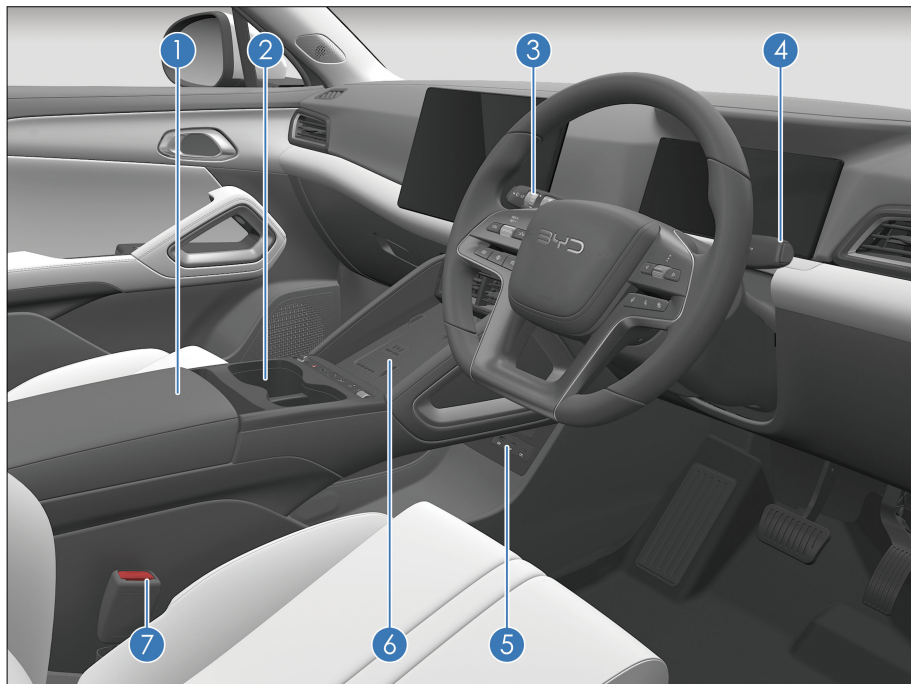

1 Center Console Cubby **P152**

2 Cup Holder **P153**

3 Light Switches **P65**

Wiper Switch **P60**


4 Gear Shift Controls **P103**

5 Front-Row USB Ports **P154**

6 Wireless Phone Charger* **P155**

7 Using Seat Belt **P12**

Doors

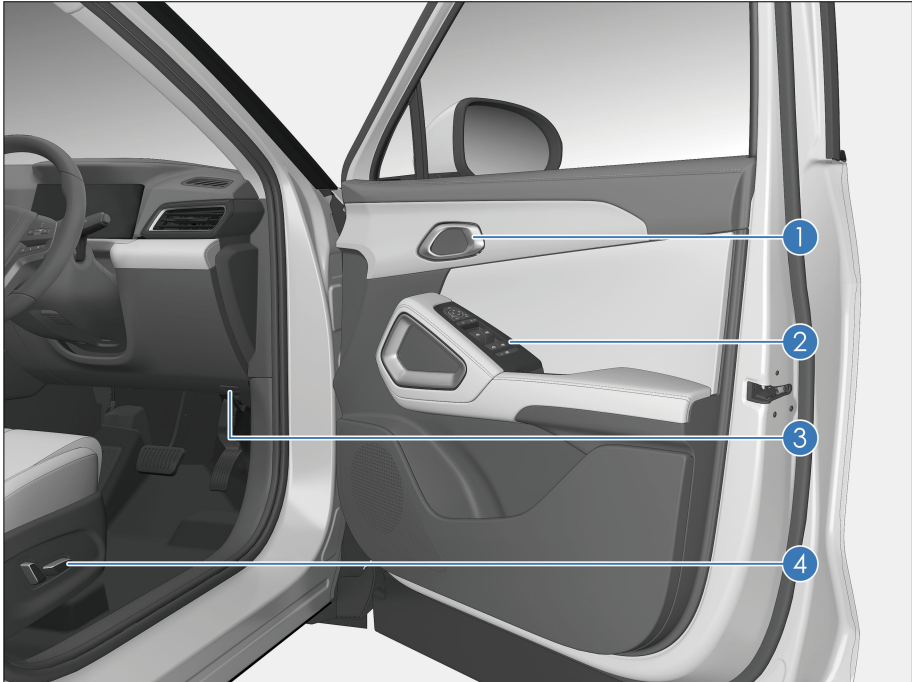

1 Opening with Interior Door Handle **P47**

2 Power Window Switches **P66**
Window Lock Button **P68**
Central Locking **P68**

Side Mirrors **P64**

3 Hood Handle **P169**

4 Adjusting Front Seats with Power **P55**

01

SAFETY

Seat Belts.....	12
Airbags.....	14
Child Restraint System.....	21
Anti-theft Alarm System.....	25
Data Collection and Processing.....	25

Seat Belts

Seat Belt Overview

Studies have shown that proper use of seat belts can significantly reduce casualties in emergency braking, sudden steering or collisions. Read the following information carefully and observe it strictly.

CAUTION

- Before driving, make sure all occupants are properly buckled up to prevent serious injury or death in emergency braking or in a collision.
- The seat belts are designed primarily for adults and are not intended for children. Make sure to choose an appropriate child restraint system according to your child's age and size (see **P21**).
- If a seat belt is damaged or malfunctions, immediately contact a BYD authorised dealer or service provider for confirmation and handling. Until then, do not use the corresponding seat.

- BYD has highly emphasised that all occupants should always fasten their seat belts while in the vehicle to prevent serious injury or death.
- Children are encouraged to travel on the rear seats and must be buckled up in appropriate child restraint systems. In case of emergency braking or a collision, unprotected children may be seriously injured and their lives may be endangered. Likewise, do not allow a child to be carried on someone's lap. This will render the children not adequately protected.

Emergency Locking Retractor (ELR)


- When the driver turns sharply or brakes suddenly, when there is a collision, or when the occupant leans forward too quickly, the seat belt automatically locks to effectively restrain and protect the occupant.
- When the vehicle travels smoothly, seat belts are pulled out and retracted as the occupants move slowly and smoothly, allowing the occupants to move freely.
- If the seat belt locks due to sudden retraction, pull on the seat belt webbing to create retractable slack in order to pull out the seat belt.

Pretensioner and Force Limiter Function*


When a severe front collision occurs and the triggering conditions of the pretensioner are met, the pretensioner quickly retracts part of the seat belt and locks it to improve the protection of the occupant. The force limiter limits the seat-belt restraint force to the occupant's body to a certain extent so as to avoid injury to the occupant due to an excessive restraint force.

Using Seat Belts

1. Adjust the seat position and seatback angle (see Adjusting Front Seats).
2. Adjust the position of the three-point seat belt.
 - Keeping a proper sitting posture, pull the seat belt out so that it is diagonally across the chest. The belt should not go under the arm or across the back of the neck.
 - Keep the lap section of the belt as close as possible to the hips.

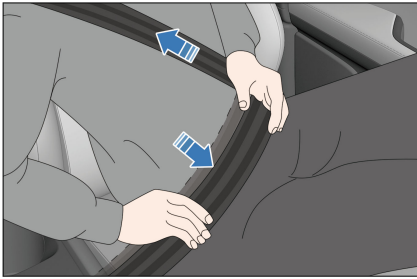

3. Insert the latch into the buckle until it clicks, and then pull it back to make sure it is firmly locked. Do not fasten the belt with any part of the strap twisted.

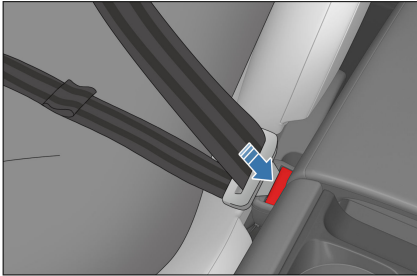


! WARNING

- The shoulder belt should cross the centre of the shoulder. The seat belt should be far from the neck and not be liable to slip from the shoulder, otherwise, it cannot function well in the event of emergency braking or accident and may even cause severe injury.
- The lap belt should be positioned as low as possible around the hips to avoid serious injury due to the intense lap belt forces against the abdomen in an accident.
- The seat belt should be fitted tight to the body for better protection.

4. Unlock the seat belt.

- Press the red unlock button on the buckle. The latch plate pops out, and the seat belt automatically retracts.
- If the seat belt does not retract smoothly and automatically, pull it out and check whether it is twisted.

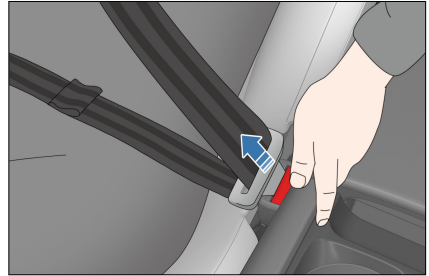

! WARNING

- One seat belt is for one occupant only. Do not share a seat belt with another occupant, not even with a child.
- Avoid travelling with the seatback leaning too far back. The seat belt protection performs best when the seatback is upright.
- Make sure that no seat belt or its spring bolt/buckle becomes pressed by the door or rear seatback; otherwise, the seat belt may be damaged.
- Check the seat belts regularly for cuts, wear, looseness, and other abnormalities. If any problem is found, contact a BYD authorised dealer or service provider for confirmation and handling. Until then, do not use the corresponding seat.
- Do not remove, disassemble or modify the seat belts without permission.

WARNING

- After an accident, have the seat belts checked at a BYD authorised dealer or service provider. If the pretensioner function is activated, the seat belt must be replaced. Use an approved model whenever you replace the seat belt.
- In the event of a serious accident, even if there is no apparent damage, the seat belt should be replaced along with the seat assembly. The airbag system should also be thoroughly inspected.
- Pregnant women need to fasten the seat belts properly and position the lapbelt as low as possible around the hips to avoid serious injury from the intense lap belt forces against the abdomen in an accident.
- The method of wearing a rear seat belt is the same as that for a front seat belt. For normal functioning of the rear seat belt, ensure that its latch is inserted into the corresponding buckle during use. The driver should remind passengers to wear seat belts properly.
- Do not insert foreign objects such as coins and clips into the buckle as they prevent proper connection between the latch and buckle.

Seat Belt Reminders

If any occupant has not buckled up after the vehicle is started, alarms go off and continue until the corresponding seat belt is properly fastened.

- Seat belt reminder main indicator

- This indicator flashes if any alarm is triggered due to unfastened seat belt.
- Display of unfastened seat belt
 - The indicator for the seat with unfastened seat belt and alarm lights up.
- Seat belt reminders
 - If the driver or any passenger has not buckled up after the ignition is switched on, the main seat belt reminder indicator and the indicator for the corresponding seat light up. When the vehicle is in motion and the driver or any passenger has not buckled up, the seat belt reminder indicator flashes and an audible alarm is given.
 - When the driver and all the passengers fasten the seat belts, the main indicator and the corresponding seat indicator turn off.

WARNING

- In the event of abnormality or function failure, contact a BYD authorised dealer or service provider. Do not use the corresponding seat until the functions return to normal.
- When driving, make sure all occupants have their seat belts properly fastened to prevent serious injury or death in emergency braking or in a collision.

Airbags

Airbag Overview

- The airbag system is a part of supplemental restraint system (SRS)

and also a supplement to seats and seat belts. When the vehicle is involved in a serious collision and the airbag system meets its deployment conditions, relevant airbags will rapidly deploy and, along with seat belts, provide additional protection for heads and chests of the occupants to reduce the risk of personal injury or even death.

- Airbags are divided into front and side types according to the type of collision. The front airbags include a driver airbag and a front passenger airbag, while the side airbags include front seat side airbags and side curtain airbags.
- As an integral part of the vehicle's passive safety protection system, the airbag system does not replace seat belts, and must be used in combination with seat belts to maximise protection.


 **WARNING**

- Occupants must sit in a proper position to maximise the protection provided by seat belts and the airbag system.
- Do not disassemble or assemble airbag components.
- If the seatbacks get wet from rain or splashes, the side airbag system may not work properly.

 **WARNING**

- Do not use seat covers, as they restrict airbag deployment on the corresponding side in an accident.
- Do not place anything between the side airbag and the occupant.
- Do not apply excessive force to the side of seats equipped with side airbags.
- After a collision, even if the airbag did not deploy, and the pretensioner did not lock the seat belt, to ensure the normal operation of the airbag system, contact a BYD authorised dealer or service provider for inspection as soon as possible.
- The airbag warning light stays on in the presence of certain system faults. If this light stays on, please head to the nearest BYD authorised dealer or service provider for an airbag system inspection.
- If the vehicle is ingressed with water (wet carpet or vehicle submerged in water) or damaged by water, do not start the vehicle and the low-voltage battery needs to be disconnected. Otherwise, the airbags may deploy, resulting in serious injury or death.

Airbag Types

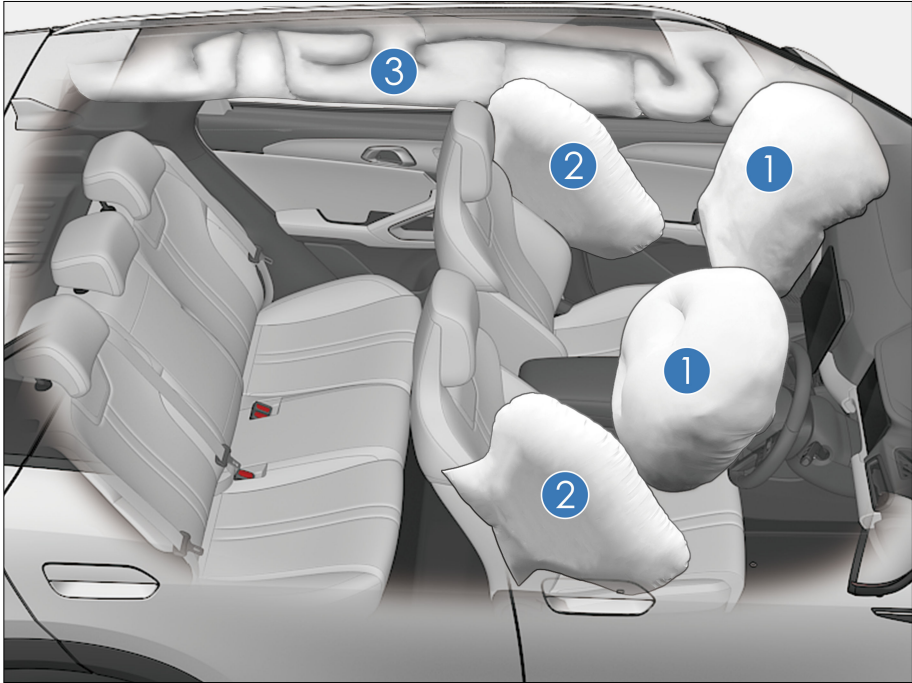

① Driver and front passenger airbags

② Front seat side airbags

③ Side Curtain Airbags

Driver and Front Passenger Airbags

The driver airbag is mounted inside the steering wheel and the front passenger airbag is mounted inside the dashboard, both marked with "AIRBAG". When the airbag system detects a moderate to severe front impact during driving and the triggering conditions are met, the airbags deploy.

Front airbag deployment

- In moderate to severe frontal crashes, a sensor detects a sharp deceleration and sends a signal to the ECU to trigger the front airbags.

- When there is a frontal crash, the seat belt secures the occupant's lower body and torso and the airbag cushions and protects the occupant's head and chest.
- When the severity of the impact does not reach the airbag deployment threshold, seat belts provide enough protection.
- The front airbag deflates immediately after inflation, without affecting the driver's vision and ability to operate the steering wheel or other controls.
- Airbags can inflate rapidly when triggering conditions are satisfied to

further protect drivers and occupants in an accident.

- A loud noise will be heard when the airbag deploys. It will not cause injury, but it may cause tinnitus or temporary deafness.
- The deployment of airbags may release smoke and dust. Although these substances are non-toxic, passengers with respiratory conditions may experience temporary discomfort. If the discomfort is severe, seek medical attention immediately.
- The front passenger airbag is controlled by the passenger airbag switch. See **P69** for details.

WARNING

- No accessories, such as telephone holders, cups, ashtrays, may be installed on airbag covers or within their action range. Otherwise, airbag deployment will increase the risk of injury in an accident.

Front Seat Side Airbags

The front seat side airbags are mounted on the outside of front seatbacks, marked with "AIRBAG". When a moderate to severe side impact is detected during vehicle travel and the triggering conditions are met, the airbag deploys to protect the chest of the occupant on the side of collision.

WARNING

- Generally, only the airbag on the impacted side deploys in the event of a side impact.
- If the impact occurs on the passenger's side, the airbag on the passenger's side deploys even if there is no passenger in the seat.

WARNING

- For optimal side airbag protection, occupants must have their seat belts fastened and sit upright against the seatback.

Side Curtain Airbags

The left and right side curtain airbags are mounted at the junction of the body side trim and the ceiling and marked with "AIRBAG" on the B-pillar and C-pillar trims. When a moderate to severe side impact is detected during vehicle travel and the triggering conditions are met, the side curtain airbag deploys to protect the head of the occupant on the side of collision.

WARNING

- For optimum curtain airbag protection, the occupant must have their seat belt fastened and sit in an upright position.


Airbag Triggering Conditions and Precautions

- Airbag triggering conditions: In the event of a vehicle collision, whether an airbag will be triggered is decided by factors such as the amount of collision energy, accident type, collision angle, obstacle type, and vehicle speed. The airbag system may be triggered in special collisions.
- The airbag system does not always work in any accident, and generally it will not be triggered in the event of a minor frontal collision, rear collision or rollover. In this case, the driver and passengers are protected by their properly fastened seat belts.

- Determinants of airbag system triggering: Decision is made by comparing the deceleration curve, generated in the collision and obtained by the Electronic Control Unit (ECU), and the set value. If signals, such as the deceleration curve generated and measured in the collision, are lower than the respective reference values preset in the ECU, the airbag system will not be triggered even if the vehicle may have been seriously deformed in the accident.
- The ECU of the BYD airbag system has been set up with considerations of common misuse and road conditions. However, due to the increasing changes in causes and forms of vehicle collisions, for your safety, please strictly follow this user manual, use the vehicle correctly, and avoid its misuse. Otherwise, there is no guarantee that the airbags will achieve their expected effect.


Cases When Airbags May Be Deployed

- ① The vehicle's nose hits the ground when crossing a deep groove.
- ② The vehicle hits a bump or kerbstone.
- ③ The vehicle's nose hits the ground when going down a steep slope.
- ④ One side of the vehicle is hit by another vehicle.

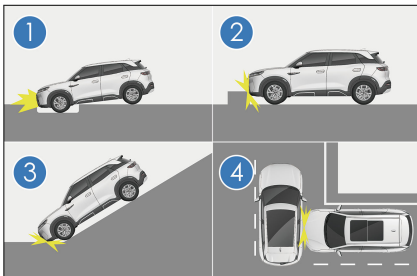


Cases When Airbags May Not Be Deployed

- ① The vehicle hits a concrete column, tree, or other slim objects.
- ② The tail of the vehicle is hit by another vehicle.
- ③ The vehicle goes under a truck or another large vehicle.
- ④ The vehicle rolls over.

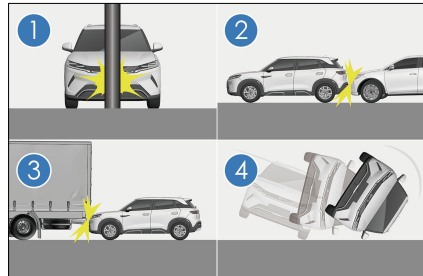

- ⑤ The vehicle hits a wall or a vehicle at a side other than the front side.
- ⑥ Parts other than the passenger compartment receive side impact.
- ⑦ The lateral side of the vehicle is hit diagonally.
- ⑧ The lateral side of the vehicle hits a columnar object.

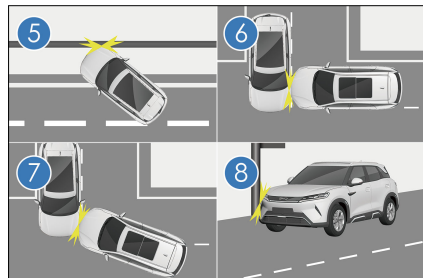

WARNING

- Airbags are designed for specific models. Any changes to

 **WARNING**

suspension, tyre size, bumpers, chassis and factory-equipped devices may adversely affect the airbag system. Users must not use any parts of the airbag system on other vehicle models; doing so may lead to failure of the airbag system.

- Drivers should maintain a distance of at least 25 cm between their chest and the steering wheel, in order for the system to provide the most effective driver protection.
- When the airbag system deploys, the airbag reaction high temperature gas will be discharged from the airbag vent. Drivers should avoid touching its parts and keep hands holding the steering wheel in the correct position, otherwise there is a possibility of burns when the airbag deploys.
- Fasten your seat belt and sit properly while the vehicle is in motion. If the seat belt is not fastened, and the occupant is leaning forward or sitting improperly, airbag deployment can increase the risk of injury.
- Do not paste stickers, cover or decorate the hub cover of the steering wheel, the right side surface of the dashboard or the surface of A, B, and C pillar trims. Clean these surfaces with a dry or damp cloth, without applying too much pressure.
- A child is not to be seated in the front passenger seat, nor are they to ride sitting on a front passenger's lap, to prevent

 **WARNING**

serious injury or even casualty caused by airbag deployment.

- Side airbags and side curtain airbags deploy quickly with high impact forces. That is why occupants must not lean against the doors while these vehicles are in motion. Failure to do so could result in serious injury or even death.
- Do not place any other accessories or items within the action range of side curtain airbags, including the windscreen, side door glass, A-pillar trim, ceiling, B-pillar trim, C-pillar trim and auxiliary handles. When the side curtain airbag deploys, the accessories or items will be thrown by the impact force from the side air curtain airbag, or the side curtain airbag may not deploy normally, resulting in serious injury or even death.
- When transferring vehicle ownership, make sure to pass on all of the vehicle's documents and keep the new ownership informed of airbag conditions.
- Do not modify or replace seats or trims of the seats with side airbags. These changes may prevent normal deployment of side airbags, and thereby cause airbag system failure or unintended deployment of side airbags, resulting in serious injury or death.
- Do not disassemble or repair the A-pillar trim, ceiling, B-pillar trim or C-pillar trim, which contain side curtain airbags. These changes can cause failure of the airbag system or accidental deployment

⚠ WARNING


of curtain airbags, which may cause serious injury or even death.


- Do not change any component of the airbag system, including any corresponding label. It is recommended that any operation done to the airbags be performed by a BYD authorised dealer or service provider.
- Airbags can only provide one-time accident protection. Once the airbag is triggered or damaged, the airbag system must be replaced.
- Follow safety regulations and procedures related to the scrapping of parts of the vehicle or its airbag system.
- The airbag system has strong anti-interference and anti-disturbance resistance to electromagnetic fields around it. However, to avoid accidents, do not use the vehicle in an electromagnetic environment that violates national regulations.
- The airbag system of this vehicle is designed with full consideration of domestic common misuses and road conditions. However, in order to avoid accidents, do not have the bottom of the vehicle impacted or drive roughly in harsh road conditions.
- This vehicle's airbag system has been fully verified to seamlessly match the vehicle's original wiring harness system. Any wiring harness modification or alteration may cause the airbags to deploy mistakenly under normal

⚠ WARNING


conditions or fail to deploy in the event of a collision.

It is recommended that you contact a BYD authorised dealer or service provider immediately if any of the following situations occurs.

- Any airbag has deployed.
- Instrument cluster airbag warning light  lights up abnormally.
- There is a collision with the front of the vehicle (the shaded portion as shown), but the airbags do not deploy.

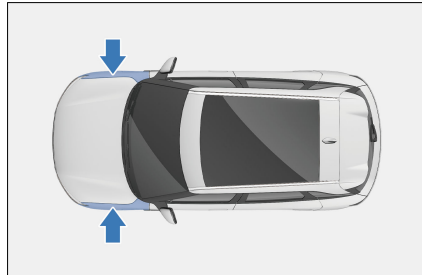

- The airbag cover (highlighted area shown) has been scratched, cracked or otherwise damaged.

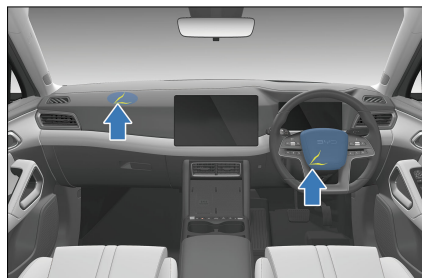

- Airbags need to be removed, disassembled, installed or repaired.
- An impact to a vehicle door in an accident is not adequate to cause the airbag to deploy.

- The surface of the seat with a side airbag is scratched, cracked, or damaged similarly.
- Decorative (liner) parts at A-pillar with built-in curtain airbags, roof beam and C-pillar are scratched, cracked, or damaged similarly.

Child Restraint System

Child Restraint System

- Choose a suitable child restraint system for your child's age and stature. A child who cannot use a protection device for size reason must sit in the rear seat and have the seat belt fastened properly.
- Please correctly fix the child restraint system to a seat, even if not used. Do not place it on a passenger seat or in the boot without fixing.

WARNING

- Be sure to use a seat belt or child restraint system for a child based on his/her age and size, so as to effectively protect the child in an accident or emergency stop. Holding a child in arms is not a substitute for a child restraint system. In an accident, the child may be crushed against the windshield or between you and the cabin.
- Vehicle with Side Curtain Airbags: Even though a child is in the child restraint system, do not allow his/her head or any other body part against any door, seat, front/rear pillar or roof side beam (which will be affected when side curtain airbags deploy).

WARNING

Otherwise, the considerable impact force generated when the curtain airbags deploy will cause serious or even fatal injury to the child.

- Please follow the installation instructions provided by the child restraint manufacturer to make sure the child restraint it is properly installed in the vehicle. Otherwise, emergency parking or an accident may result in serious or even fatal injury to the child.
- Children are not allowed to stand in the car or kneel on the seat when the car is moving to prevent serious injury or death in emergency braking or collision.
- Every child restraint system must be properly and safely installed. Researches indicate that it is safer to install child restraints on the rear seats than the front seats.

Installing Child Restraint Systems

Secure it to the rear outboard seat according to its installation instructions provided by the manufacturer. The rear seats are equipped with ISOFIX anchors for child restraints. Make sure to fasten the top tether when installing a child restraint.

Installing Child Restraint Systems with ISOFIX Rigid Anchor


- A special anchorage is provided on the rear outboard seat (the label showing the anchorage is attached to the seat).
- The anchorage lever is located on the bevel at the rear end of the seat and is visible by pressing the lower part of the seatback.



! REMINDER


- Do not buckle the protective cover of the child restraint outward to avoid damage.
- After removing the child restraint, press the upper part of the protective cover to reset the cover.

- The rear seats are equipped with anchor supports on the back.

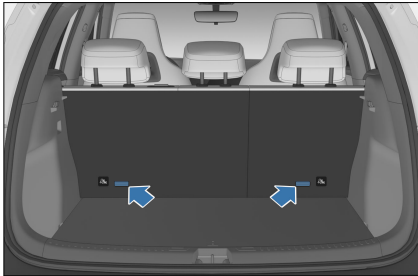

Installing a child restraint

1. Check the position of the anchorage and install the child restraint on the seat.

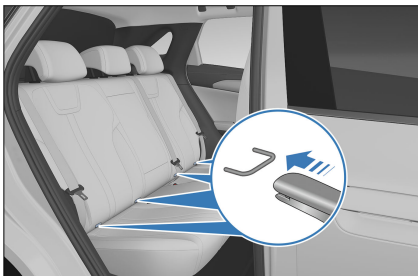


! REMINDER

- The anchorages are located in the gap between the seat cushion and the seatback.

2. Fasten the snap hook of the top tether strap to the anchor support, and tighten the top tether to ensure the strap is secure.

- ① Top tether
- ② Snap hook

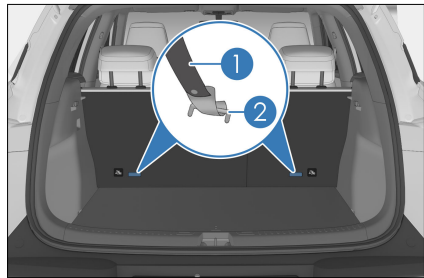

3. Reinstall the head support.

- If the driver seat obstructs the correct installation of the CRS, install it on the right rear seat.
- Never install a rear-facing child restraint on the seat protected by a front airbag (in the active state), otherwise in the event of an accident, the force of rapid deployment of the front passenger airbag will result in death or serious injury to the child.



! WARNING

- Push/Pull the child restraint in different directions to ensure it is securely installed.
- When using the lower anchoring device, make sure that no foreign objects are around the anchoring device and that the seat belt is not stuck behind the child restraint; make sure that the child restraint is securely fixed, otherwise emergency parking or an accident may result in serious even fatal injury to a child.
- Do not install a child restraint on the front passenger seat and the rear middle seat.
- For a front-facing child restraint, the head support should be removed if it interferes with the fit of the child restraint seatback to the rear seats.

! WARNING

- For a rear-facing child restraint, the head support should be adjusted to the lowest position.
- For a raised cushion, the top of the head support should be adjusted to be flush with or closest to the top of the child's head.
- Do not allow children to play with seat belts, otherwise, this could result in serious or even fatal injury to the child.
- Child restraint anchorages are designed to withstand only those loads imposed by correctly fitted child restraints. Under no circumstances are they to be used for adult seat belts, harnesses, or for attaching other items or equipment to the vehicle.

Recommended seating positions for installing child restraint systems

Weight Group	Seat (or Other Positions)		
	Front passenger seat	Rear outboard seat	Rear middle seat
Portable Bed	X	X	X
Group 0 Less than 22 lb (10 kg)	X	U	X
Group 0+ Less than 28 lb (13 kg)	X	U	X
Group 1 20-39 lb (9-18 kg)	X	U/UF	X
Group 2 33-55 lb (15-25 kg)	X	UF	X

Weight Group	Seat (or Other Positions)		
	Front passenger seat	Rear outboard seat	Rear middle seat
Group 3 48-79 lb (22-36 kg)	X	UF	X

Note: Table definitions:

U: seat suitable for installing a universal child restraint certified for this weight group

UF: seat suitable for installing a front-facing universal child restraint certified for this weight group

X: seat position not suitable for installing a child restraint for this weight group.

Seat belt, ISOFIX or i-Size CRS installing options in the vehicle

Type	Seating Position				
	Front left	Front right	Rear left	Rear middle	Rear right
Seating position suitable for universal belted (Yes/No)	No	No	Yes	No	Yes
i-Size seating position (Yes/No)	No	No	No	No	No
Seating position suitable for lateral fixture (L1/L2/No)	No	No	No	No	No
Largest suitable rearward-facing fixture (R1/R2X/R2/R3/No)	No	No	R1/R2X/R2/R3	No	R1/R2X/R2/R3
Largest suitable forward-facing fixture (F2X/F2/F3/No)	No	No	F2X/F2/F3	No	F2X/F2/F3
Largest suitable booster fixture (B2/B3/No)	No	No	No	No	No

Anti-theft Alarm System

Anti-theft Alarm System

Arming the system

1. Switch off the ignition.
2. All occupants get off the vehicle.
3. Lock all doors. The anti-theft alarm system will arm automatically after eight seconds.

Triggering the alarm

- The system, when armed, will raise an alarm* with flashing turn signals in any of the following situations:
 - Any door, boot lid or bonnet is unlocked without using the smart key access function.
 - Use the mechanical key to unlock the vehicle.

Disarming the system

- Anti-theft alarm can be stopped by:
 - Unlocking the door or boot with a valid smart key/NFC key/App.
 - Using the microswitch to unlock the door by carrying a valid smart key.
 - Starting the vehicle remotely with a valid smart key.
 - Pressing the START/STOP button inside the vehicle while carrying a valid smart key.

WARNING

- Do not repair, replace or modify the components of the anti-theft system; such modifications may cause the system to malfunction


WARNING

or affect the terms of the insurance.

- If a fault occurs, contact a BYD authorised dealer or service provider.

Data Collection and Processing

Data Collection and Processing

- This section provides you with some important information on how personal data is collected and processed when you use a BYD vehicle.
- For a more detailed overview on data processing, data protection and data subject rights, please refer to the current version of the privacy policy available in the infotainment system ( → **System** → **General** → **Agreement and Statement**).
- This vehicle is equipped with an event data recording (EDR) system. EDR mainly records data in the event of a crash or near-crash (for example, airbag deployment or hitting on a roadside obstacle) to help comprehend the vehicle system operation, such as:
 - Vehicle velocity.
 - Tyre pressure condition.
 - Adaptive cruise control (ACC) system status
 - Whether the seat belt is fastened.
- The vehicle records EDR data only when there is a crash or when a

near-crash event reaches a certain extent. The EDR does not record any data during the normal driving of the vehicle.

- The data recorded by the EDR system provides an understanding of the state of the vehicle's safety-related systems when an accident occurs, so that relevant parties can analyze the accident.
- The EDR data needs to be accessed and read by special equipment. BYD discloses your personal data to third parties only if this is legally permissible or you have consented to it. In addition to the vehicle manufacturer, third-party agencies with professional equipment (such as government agencies) can also read the EDR data if they have access to the vehicle EDR and equipment (for example, they can read the data of SRS control unit to clarify the accident).

Vehicle Data Processing

- Data is collected when the vehicle is used, such as data collected or transmitted by vehicle sensors or control units, which is necessary for the safe functioning of your vehicle.
- In some cases, the data is used to support driving (driver assistance systems) or to enable a specific comfort or infotainment function.
- Personal data that is collected and processed mainly include in-vehicle data, remote-services-related data, and other data, as further specified below.

In-vehicle data

Operation data

- When the vehicle is used, various vehicle status data (e.g., speed,

battery level, and braking system) or environment (e.g., distance sensors, rain sensor, and temperature) data is collected and processed.

- This data is not usually stored, but there are control units, sensors or other components installed in the vehicle that record such data, for example, to record maintenance requirements, error messages, or other information.
- The in-vehicle data will only be stored in the equipment in the vehicle but can be read out via the legally required OBD ("On Board Diagnostics") interface, for example, by BYD authorised dealer or service provider or other third parties.
- In case this access takes place during vehicle maintenance, the information can also be transmitted to BYD engineers for quality assurance, product defect reports, or customer claim verification.

Remote-services-related data

Remote monitoring services

- The vehicle has remote monitoring services. These include remote diagnosis and over-the-air (OTA) updates and upgrades for security and safety purposes (subject to owner's approval).
- These monitoring services serve the following purposes: service provision (remote support/diagnostics), product development, and security/public safety.
- Depending on the country and setup, various vehicle information can be transmitted to BYD's data centre in corresponding market for the above purposes, including vehicle location information, vehicle status, such as energy consumption, vehicle speed, gear position, power mode, ESC status,

steering system status, battery status, powertrain status, and overall vehicle performance status.

Other

Infotainment system

- Depending on vehicle configuration, data can be added to the infotainment system by the users themselves, such as media data for playing video on the infotainment system, address data for use in the navigation system, or data for use in online services.
- Depending on vehicle configuration, individual settings in and on the vehicle can also be entered.
- Data stored in the vehicle can be deleted at any time.
- BYD has no control over data transferred to third parties (from the use of third party content, in particular as part of online services).

Integration of mobile devices

- Depending on vehicle configurations, mobile devices can be connected and controlled through the vehicle's infotainment system.
- It may be necessary that the device's screen or audio is displayed/played through the infotainment system or transmitted to it.
- Additional data like positioning or vehicle information can be transmitted through applications for use in certain navigation systems, communication, or other third-party services.
- The specific type of data processing depends on the respective function and is controlled by the user or third parties such as the provider of the devices or corresponding services.

Internet access and connected services

- Depending on vehicle configurations, the Internet can be accessed for certain functions or BYD services through the vehicle's infotainment system network devices.
- BYD is not liable for any such services provided by any other party.
- In such cases, please obtain information about the use of data from the provider of the respective online service.

Camera image recording/surrounding area monitoring

- Your vehicle is equipped with a number of cameras/sensors.
- The reason for this is that some vehicle functionalities require the vehicle's path to be detected and assessed which is done by cameras that detect objects in the vehicle's surroundings (e.g., obstacles).
- The images are transmitted to the respective control module for further analytics required to operate the systems.
- Some images are just processed on a volatile basis (RAM), others may be stored, depending on vehicle equipment.
- The vehicle may be equipped with an outward-facing camera (OFC) that can be used to take footage of the surrounding (for example, dashcam).
- The vehicle may also be equipped with an inward-facing camera (IFC), which can be used to take footage inside the vehicle.
- Both OFC and IFC footage is stored.
- You are responsible to check the laws of your residence before turning on your OFC or IFC (for instance, in some countries consent is required for the



use of IFC, and in others OFC is strictly restricted to dashcam purposes).

- For more camera details, see section "Panoramic View System" in this manual.

Permanent Vehicle Transfer to Third Parties and Offline Mode

- In case of a permanent vehicle transfer, i.e., second hand vehicle, or vehicle transfer by a third party for permanent use, it must be noted that any personalisation/user settings made via the infotainment system (e.g. address list, navigation system, etc.) may be accessed by the new owner.

REMINDER

- Before scrapping the vehicle or transferring vehicle ownership, it is recommended to restore the factory settings to protect your personal privacy.
- You can also restrict your vehicle's communication with the BYD data server and the processing of vehicle-related and personal data by setting the vehicle to offline mode.
- On the infotainment touchscreen, tap  to turn Wi-Fi off.
- This can also be done by tapping  → **System** → **Link**.

Disclosure of Personal Data to Authorities

- BYD discloses your personal data to third parties only if this is legally permissible or you have consented to it.
- However, subject to applicable laws, government agencies may be authorised to read out data from

vehicles (e.g. data can be read from the airbag control unit to clarify an accident).

- If required by law, BYD may also be obliged to disclose data upon request to governmental authorities in your country, such as in the investigation of a criminal offence.

Your Data Protection Rights

- BYD has staunch respect for its customer's privacy, and strictly complies with all data protection laws, in particular the General Data Protection Regulation (GDPR) and applicable local laws.
- According to these laws, owners have specific rights when their personal data is processed:
 - Data subjects have the right of information and access, to rectification, erasure of personal data ("right to be forgotten") and the right to object to the processing of personal data or to restrict it (or to withdraw consent given earlier, as well as the right to data portability).
- These rights may be limited in some cases. For example, if we can show that we have a legal obligation to process your data, or if providing the information to you would disclose personal data about another person, or if we are legally prevented from disclosing that information.
- In some cases, this may mean that we can retain the data even if you withdraw your consent.

02


INSTRUMENT CLUSTER

Instrument Cluster.....30

Instrument Cluster

Instrument Cluster View

LCD Instrument Cluster

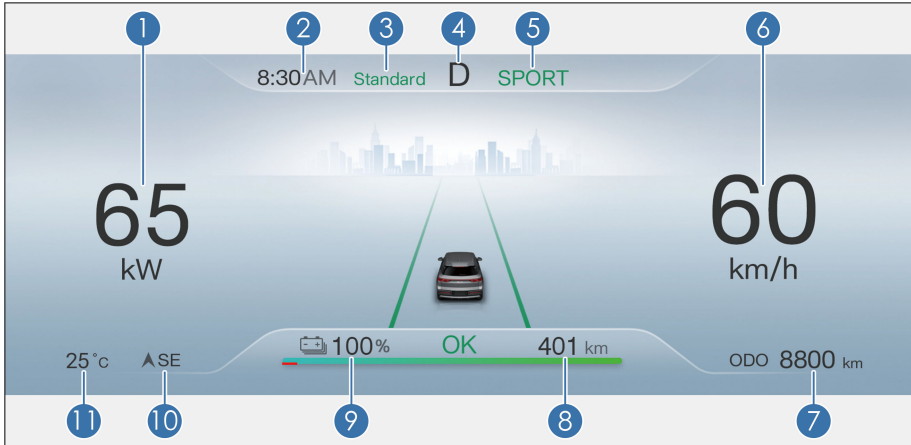

- | | | | |
|---|--------------------------------|----|-----------------------|
| 1 | Power meter | 7 | Total mileage |
| 2 | Time | 8 | Driving range |
| 3 | Regenerative braking intensity | 9 | State of charge (SOC) |
| 4 | Gear status | 10 | Direction |
| 5 | Driving mode | 11 | Outside temperature |
| 6 | Speedometer | | |

CAUTION

- During occasional communication delays in the instrument cluster system, the instrument cluster may automatically switch to simple mode for safe driving. In this mode, the instrument cluster continues to display driving related information normally without affecting normal vehicle travel. After the system becomes normal, the instrument cluster

CAUTION

may automatically exit the simple mode. If it does not, try the following actions to switch back to normal mode:

1. Press and hold the scroll button on auxiliary dashboard for three seconds to restart the instrument cluster information display system.

CAUTION

2. While safety is ensured, restart the vehicle.















- If the instrument cluster remains in simple mode after those actions have been taken, promptly contact a BYD authorised dealer or service provider for inspection.
- The image of the instrument cluster view is for reference only


























CAUTION

and is subject to actual factory configuration.

Instrument Cluster Indicators

Indicators/Warning Lights

	Turn signal indicator		Position light indicator
	Discharge indicator		AVH indicator
NORMAL	Normal mode indicator		BSD indicator*
	ICC indicator *		ACC status indicator*
	Hill descent control indicator	SPORT	Sport mode indicator
OK	OK indicator		Regular cruise control main indicator*
ECO	Economic mode indicator		Lane keeping indicator*
	Low beam indicator		IHBC indicator*
	High beam indicator		Trailer mode indicator*

	Main alarm indicator		Driving power limit warning light
	Tyre pressure fault warning light		ABS fault warning light
	ESC system fault warning light		ESC system deactivation warning light
	Smart key warning light		Rear fog light indicator
	Headlight fault warning light		Snow mode indicator
	AVAS OFF indicator		AEB indicator*
	High-voltage battery low SOC warning light*		Low-voltage power system fault warning light
	TSR indicator		EPB indicator
	Parking brake system fault warning light		Seat belt reminder indicator
	Powertrain fault warning light		Charging connection indicator
	High-voltage battery overheating warning light		High-voltage battery fault warning light
	Airbag fault warning light		Coolant overheating warning light
	Steering system fault warning light		

Warning Lights/Indicators Description



Smart key warning light

- If the key is not in the vehicle when you press the START/STOP button, this warning light comes on for a few seconds, a beep sounds, and the message "No key detected, please confirm if the key is in the vehicle" is displayed on the instrument cluster.
- If you press the START/STOP button while an electronic smart key matching the model is in the vehicle, this warning light does not light up. The vehicle can now be powered on.
- If the warning light flashes after you press the START/STOP button, it indicates low battery of the key.



Antilock Braking System (ABS)

- This warning light comes on when the ignition is on. If the anti-lock braking system (ABS) is working properly, the light goes out in a few seconds. Thereafter, if the system fails, the light lights up again until the fault is cleared.
- When the ABS fault warning light is on (with the parking brake system fault warning light off), the braking system continues to operate whereas the ABS does not.
- When the ABS fault warning light is on (with the parking brake system fault warning light off), since the ABS system does not operate, the wheels will be locked in case of emergency braking or braking on a slippery road.
- If any of the following cases occurs, it means there is a fault in components monitored by the warning light system. In that case, contact a BYD authorised

dealer or service provider for vehicle inspection as soon as possible.

- This warning light does not come on or is steady on when the ignition is on.
- This warning light turns on during driving.



REMINDER

- A warning light that lights up briefly during operation does not indicate a problem.
 - If the ABS fault warning light is still on while the parking brake system warning light is on, immediately park the vehicle in a safe place. It is recommended to contact a BYD authorised dealer or service provider. In this case, if brakes are applied, the ABS will not work and the vehicle will become extremely unstable.
- If both ABS indicator and the braking system indicator come on and the electronic parking brake (EPB) is fully released, the braking force distribution system of front and rear wheels has also failed.



Tyre pressure fault warning light

- This warning light comes on when the ignition is on. It turns off in a few seconds if the tyre pressure monitoring system is working properly. If the system fails, this warning light turns on again.
- When the tyre pressure fault warning light comes on or flashes, the message "Please check TPMS" is displayed on the instrument cluster, and the tyre pressure is displayed as "---", it indicates that the tyre pressure system is faulty.

- When the tyre pressure value displays "No Signal", it indicates that the tyre pressure signal at the location of the vehicle may be disturbed or the tyre pressure monitoring module is damaged.
- When the tyre pressure fault warning light flashes rapidly and one or more values turn red on the tyre pressure screen on the instrument cluster, the corresponding tyre is leaking rapidly.
- When the tyre pressure fault warning light is solid on and one or more values turn yellow on the tyre pressure screen on the instrument cluster, the corresponding tyre is in under-pressure condition. When the temperature value of one or more tyres turns yellow, it indicates that the tyre temperature is too high.

In the event of any of the situations above, it is recommended to contact a BYD authorised dealer or service provider for inspection as soon as possible.



ESC fault warning light

- This warning light comes on when the ignition is on. If electronic stability control (ESC) functions properly, the light goes out in a few seconds. If the system fails, this warning light turns on again until the system fault is cleared.
- If the ESC warning light flashes temporarily while the vehicle is in motion, it indicates the ESC system is working.
- When the ESC warning light turns on (with the ABS fault warning light and the parking brake system fault warning light off), the ESC fails, but the ABS and the braking system continue to operate normally.
- When the ESC warning light turns on (with the ABS fault warning light

and the parking brake system fault warning light off), the ESC system does not work. This means the vehicle is extremely unstable at sharp turns or when the driver steers away from obstacles ahead.

- If any of the following cases occurs, it means there is a fault in components monitored by the warning light system. In that case, contact a BYD authorised dealer or service provider for vehicle inspection as soon as possible.
 - This warning light remains off (self-check not performed) after the vehicle is powered on.
 - This warning light is steady on while driving.



REMINDER

- A warning light that lights up briefly during operation does not indicate a problem.
- If the ESC warning light remains on while the warning lights for the ABS and the braking system are on, immediately stop the vehicle in a safe place and contact a BYD authorised dealer or service provider. This is because braking at this time can render the vehicle extremely unstable, and the anti-lock braking system does not work at all.



ESC OFF warning light

- When the ESC OFF switch is pressed, this warning light should remain steady on and the ESC system will not operate. When the ESC OFF switch is pressed again, this warning light should turn off and the ESC system resumes its normal operation.

REMINDER

- Once the ESC OFF warning light is on, the driver must stay alert and drive at a low speed when making a sharp turn or avoiding obstacles which appear suddenly, because braking at this time can render the vehicle unstable, as the ESC system is switched OFF.



Driving power limit warning light

When the level of the high-voltage battery is low and the power of the vehicle is limited, this warning light will light up, and it is recommended to contact a BYD authorised dealer or service provider in time.



Headlight fault warning light

- When the warning light is yellow, it indicates the headlight is faulty, and it is recommended to bring the vehicle to a BYD authorised dealer or service provider for inspection.



Main alarm indicator

- If this indicator goes on, check the fault prompt or warning on the instrument cluster.



Seat belt reminder indicator

- When the ignition is switched on, if any belt on the front row is not fastened, the seat belt reminder lights up. It remains on until the seat belt is fastened.



Airbag fault warning light

- With the ignition switched on, this warning light turns on and then goes off in a few seconds if the airbag system is working properly. This warning light is used to monitor the airbag ECU, collision sensors, inflation device, warning lights, connections, and power supply.
- If any of the following cases occurs, it means there is a fault in components monitored by the warning light system. In that case, contact a BYD authorised dealer or service provider for vehicle inspection as soon as possible.
 - When the ignition is switched on, this warning light remains off or is solid on after the ignition is switched on.
 - This warning light turns on during driving.



Parking brake system fault warning light

When the brake fluid level is low and the braking system is faulty, this warning light lights up. If any of the following conditions occurs, immediately park the vehicle in a safe place. It is recommended to contact a BYD authorised dealer or service provider.

- This warning light comes on when the ignition is switched on and the brake fluid level is low.

REMINDER

- When the brake fluid level is low, park the vehicle because it is dangerous to continue driving.
- This warning light is solid on although after starting the vehicle, the brake fluid level and EPB system operation are normal (the EPB is engaged and

released normally, and the message "Please check the EPB" is not displayed).

- Fault warning lights for parking brake and ABS come on simultaneously.

REMINDER

- A warning light that lights up briefly during operation does not indicate a problem.



Steering system fault warning light

- When the steering system is faulty, this warning light is steady on. It is recommended to bring the vehicle to a BYD authorised dealer or service provider for inspection.

REMINDER

- The steering system features an electric motor to reduce the force required to turn the steering wheel.
- When turning the steering wheel, a hum may be heard from the running motor. This does not indicate that the motor is faulty.
- Do not turn the steering wheel to its limit position for more than five seconds, otherwise the activation of temperature protection will result in heavy steering or damage the steering system.
- If you have turned the steering wheel frequently with the vehicle staying put for a long time, the steering wheel may become difficult to turn even if the warning light does not turn on. This is not a fault.

- To prevent steering system overheating, the power assist effect will be reduced if the steering wheel has been frequently turned with the vehicle staying put for a long time. As a result, the steering wheel become difficult to turn. In this case, reduce steering frequency or power off the vehicle. The system will recover within 10 minutes.

WARNING

- If the steering system fault warning light goes on, immediately park the vehicle safely, and contact a BYD authorised dealer or service provider.



Low-voltage power system fault warning light

- This light is used to warn about the operating state of the DC module and the low-voltage battery module when the vehicle is not being charged or discharging.
- In charging state, this warning light indicates failure of the charging system.
- If this warning light turns on while the vehicle is in motion, it indicates that there is a problem with the DC system or the low-voltage power system. In this case, turn off the A/C and fans, immediately park the vehicle safely, and contact a BYD authorised dealer or service provider.



Powertrain fault warning light

- If the powertrain fails, this warning light turns on.
- If any of the following cases occurs, it means there is a fault in components monitored by the warning light system.

In that case, contact a BYD authorised dealer or service provider for vehicle inspection as soon as possible.

- This warning light is steady on when the ignition is switched on.
- This warning light turns on during driving.



CAUTION

- Try not to drive the vehicle when the warning light is on. Contact a BYD authorised dealer or service provider to check the problem as soon as possible.



High-voltage battery overheating warning light

- If this warning light is on, it indicates that the high-voltage battery temperature is too high and the vehicle must be stopped to cool down. When the warning light flashes, it is recommended to immediately stop the vehicle safely and leave the vehicle as soon as possible.
- The high-voltage battery may overheat under the following operating conditions:
 - Driving up a slope for a long time in hot weather
 - Long period of stop-and-go traffic condition, frequent rapid acceleration, frequent hard braking, or vehicle running for a long time without pause.



High-voltage battery fault warning light

- This warning light comes on when the ignition is switched on. If the

high-voltage battery system is working properly, this warning light will turn off in a few seconds. If this light lights up again thereafter, it indicates a system failure. It is recommended to contact a BYD authorised dealer or service provider for inspection as soon as possible.

- If any of the following cases occurs, it means that there are faults in the components monitored by the warning light system. In such case, it is recommended to contact a BYD authorised dealer or service provider for vehicle inspection as soon as possible.
 - This warning light is steady on when the ignition is on.
 - This warning light is steady on or occasionally turns on while driving.



FCW warning light (red)

- When this indicator is on or flashes, pay attention to the distance from the vehicle ahead, and do not get too close to it to prevent potential collision.



Coolant overheating indicator

- If this indicator is solid on, it indicates that the coolant temperature is too high. Park the vehicle in a safe area until this indicator goes out.










TSR indicator

- When this indicator lights up, it means that the vehicle system has recognised the speed limit value on current road section.

Other Instrument Cluster Fault Prompts

The instrument cluster may display the following fault prompts. Handle them as recommended.

Symbol	Fault Prompt	Response
	Please check the OBC system	The on-board charging system is faulty. Check the charging connection, and reconnect the charging equipment. If the fault persists, contact a BYD authorised dealer or service provider.
	Vehicle network failure, please pull over safely and contact the service store	The vehicle may be disconnected from the data network. In this case, park the vehicle safely, and contact a BYD authorised dealer or service provider.
	EV function limited	The EV function is limited. Contact a BYD authorised dealer or service provider immediately.
	Please check the headlamp system	The headlight is faulty. Contact a BYD authorised dealer or service provider.
	Please check the FCW system*	The FCW system is faulty. In this case, park the vehicle safely, and contact a BYD authorised dealer or service provider.
	The AEB function is limited*	The AEB system is faulty. In this case, park the vehicle safely, and contact a BYD authorised dealer or service provider.
	Please check the BSD system*	The blind spot detection system for lane change is faulty. In this case, park the vehicle safely, and contact a BYD authorised dealer or service provider.
	BSD limited*	The BSD function is limited. In this case, park the vehicle safely, and contact a BYD authorised dealer or service provider.
	Please check the gear system	The shifter controller is faulty. In this case, park the vehicle safely, and contact a BYD authorised dealer or service provider.
	Please check the ICC or LKA*	The intelligent cruise control (ICC) or lane keeping assist (LKA) is faulty. In this case, park the vehicle safely, and contact a BYD authorised dealer or service provider.

Symbol	Fault Prompt	Response
	The function of the ICC or LKA is limited*	The ICC or LKA function is limited. In this case, park the vehicle safely, and contact a BYD authorised dealer or service provider.

03

CONTROLLER OPERATION

Doors and Keys.....	42
Seats.....	54
Steering Wheel.....	57
Wipers.....	60
Side Mirrors.....	63
Switches.....	65

Doors and Keys


Keys

The vehicle is equipped with keys, including electronic smart key, mechanical key (installed in the electronic smart key), bluetooth digital key* and NFC key*.



Electronic Smart Key

Press the front door microswitch, while carrying the smart key, to unlock or lock all doors, or press smart key buttons to lock/unlock doors, unlock the boot, or start the vehicle remotely.

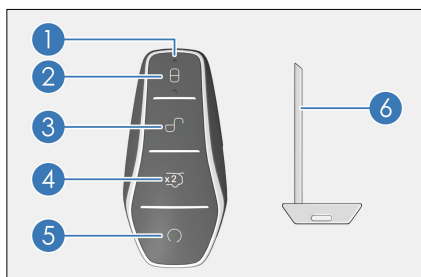- ① Indicator
- ② Lock button
- ③ Unlock button
- ④ Boot release button
- ⑤ Start/Stop button
- ⑥ Mechanical Key



WARNING

  Button battery safety alert:

- The button (coin) battery in the smart key is hazardous and both new and used batteries are to be


WARNING

kept away from children at all times.


- If swallowed or placed inside any part of the body, a lithium button battery can cause severe or fatal injuries in two hours or less.
- Medical attention should be sought immediately if it is suspected the button battery has been swallowed or placed inside any part of the body.

CAUTION

- The smart key is an electronic component. Observe the following instructions to prevent damage to the key:
 - Do not expose the smart key to high temperatures, such as on the dashboard.
 - Do not disassemble the smart key.
 - Do not let the smart key hit other objects or fall down.
 - Do not immerse the key in water or clean it in the ultrasonic scrubber.
 - Do not place smart keys with devices that emit electromagnetic waves, such as the mobile phone.
 - Do not attach to the smart key any objects (such as a metal seal) capable of cutting off electromagnetic wave signals.
 - You can register a spare key for the same vehicle. In this case, contact a BYD authorised dealer or service provider immediately.

 **CAUTION**

- If the electronic smart key cannot operate the door within the normal distance, or the key indicator light is dim or off:
 - Check for nearby radio stations or airport radio transmitters that interfere with the normal operation of electronic smart keys.
 - The smart key battery may be exhausted. Check the battery inside the electronic smart key. It is recommended to contact a BYD authorised dealer or service provider for battery change.
- If the smart key is lost or fails, it is recommended to contact a BYD authorised dealer or service provider as soon as possible to reduce the risk of vehicle theft or accidents.
- Do not change the transmission frequency arbitrarily, increase the transmission power (including additional transmission frequency amplifier), or arbitrarily connect the external detection antenna or switch other transmitting detection antennas.
- The use of the smart key must not cause harmful interference to legal radio communication services. Once interference is found, stop using the key immediately and take measures to eliminate the interference before continuing to use.
- The use of micropower radio equipment must be free from interference of all radio services or from radiation of industrial, scientific, and medical equipment.


 **CAUTION**

- Do not use it near aircraft or airports.
- People implanted with pacemakers or defibrillators should stay away from the detection antennas of intelligent entry and start systems, as electromagnetic waves can affect the normal use of such devices.
- In addition to people implanted with pacemakers or defibrillators, those who use other electronic medical devices should also consult the manufacturer on the use of such devices under the influence of electromagnetic waves. Electromagnetic waves may bring unknown consequences to the use of such medical devices.
- When leaving the vehicle, always carry your key and lock the vehicle. Never leave anyone (especially children) alone in the vehicle.

Mechanical Key

Use the mechanical key (inside the smart key) to lock or unlock the driver's door. Insert the mechanical key back into the smart key when it is not in use.

- Press the "PUSH" button ① on the smart key, and take out the mechanical key in the direction indicated by ②.

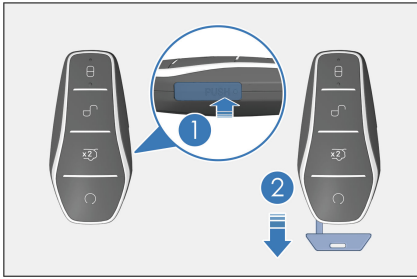

- To put the mechanical key back, press the PUSH button and then insert the mechanical key.

Bluetooth Digital Key*

Mobile Phone Bluetooth Digital Key*

The BYD Bluetooth digital key allows you to control the vehicle via a short-range Bluetooth connection between the smartphone and the vehicle, including functions such as starting the vehicle*, unlocking and locking the vehicle doors.

- Download and install the latest version of the BYD app from the app store. The app integrates the BYD Bluetooth digital key functionality.
- If you are using a vehicle equipped with the Bluetooth digital key function, follow these steps to set up the key near the vehicle:
 1. Open the BYD app.
 2. Switch on the Bluetooth of your phone.
 3. Select the corresponding vehicle.
 4. Tap the "Bluetooth Key Setup" button on the vehicle page to activate the Bluetooth key.
- Turn on the Bluetooth on your phone, approach the vehicle, and open the BYD App for automatic Bluetooth digital key connection. You can also connect it manually. The key is effective after Bluetooth is connected.
- The specific functions supported by the key are subject to the vehicle configuration. The Bluetooth key operates through a Bluetooth connection and sends control commands to the vehicle, without relying on mobile network status.
- In some countries or regions, according to relevant regulations, when a user starts the vehicle, the vehicle will detect the position of the Bluetooth digital key. The vehicle can be started only when it detects that the key is within a specific range around the vehicle to ensure the vehicle property safety.
 - In such cases, after you unlock the vehicle with the Bluetooth key, the vehicle's starting permission will not be released. You need to carry the physical key or tap the "Start" button on the BYD App to start the vehicle.
 - To ensure a good user experience, when starting the vehicle, tap the "Start" button on the BYD App while close to the driver's side of the vehicle.
- When you unbind the vehicle or cancel the cloud service, your Bluetooth key will be deleted.

CAUTION

- Before activating the Bluetooth key, ensure that the vehicle network signal is good. If the activation fails, try to move the vehicle to a place with good network and activate the key again in the application.
- After the vehicle is unlocked with a Bluetooth digital key, the doors may lock automatically if there is no operation in a short time.

CAUTION

- When the Bluetooth key connection or operation fails for many times, you can turn the Bluetooth off and then on, or restart the application.
- Limited by the vehicle environment and mobile phone performance, the effective distance of the key will be reduced in case of dense vehicles.
- The Bluetooth digital key requires your smartphone's Bluetooth and location services to be turned on. If you encounter any issues, please contact a BYD authorised dealer or service provider.
- The operating system versions supported by the mobile Bluetooth car key are iOS 16 and above, and Android 6.0 and above.

NFC Key*

- The vehicle supports NFC key card* and NFC digital key* (including smartphones and wearable devices. See **P45** for details).
- Place the NFC key at the mark on the left side mirror to unlock/lock all the doors.

CAUTION

- Some smartphone and wearable device models do not support NFC digital keys.
- NFC key card is an electronic product. The following instructions must be observed to prevent function failure or damage to the card:

CAUTION

- Do not place the NFC card in the charging area when the wireless charger is on.
- Do not attach any object (such as a metal seal or metal phone case) that may cut off electromagnetic waves, when using the NFC card.
- Do not place the NFC card in a position exposed to high temperature, such as on the dashboard.
- Do not bend the card with force.
- Do not place the card with other hard objects.
- NFC key cards use near-field communication technology, requiring a detection distance of less than 2 cm. Hold your NFC card close to the side mirror for 1-2 seconds.
- The NFC smart card is a key configured for the vehicle based on the near field communication method. In order to ensure vehicle safety, handle it with care. If it is lost, going to BYD authorised dealer or service provider for blocking of the lost card and re-configuration is recommended.


NFC Digital Key*

- NFC digital key is a function provided by BYD for users. You can register smartphones or wearable devices as vehicle keys to unlock, lock, and start the vehicle.
- Before activating the NFC digital key, observe the following conditions:
 - The vehicle has been equipped with BYD Cloud Service.

- The vehicle supports NFC digital key.
- Some mobile phones and wearable devices support BYD NFC digital keys.

Activating the NFC digital key on smartphones

Before activating, start the vehicle and shift into "P" with a valid smart key. You can activate the NFC digital key in any of the two ways:

- Via BYD App:
 - Download BYD App in App Store, then register and log in to the app. Navigate to **Digital Key** and follow the instructions to activate the key.
- Via the infotainment touchscreen:
 - On the infotainment touchscreen, tap  → **Locks** → **Locks** → **Digital Key** and follow the instructions to activate the key.

Activating the NFC digital key on wearable devices

Supported wearable devices include Apple Watch (consult a BYD authorised dealer or service provider for other supported wearable devices), and there are two ways for activating:

- Synchronise data to Apple Watch after the successful activation on iPhone:
 - Wear an unlocked Apple Watch and activate the iPhone digital key. After activation, iPhone synchronously prompts to add a digital key on the nearby bound Apple Watch. Activate it according to the instructions.
- Via Watch App:
 - This method is applicable when the iPhone digital key is activated but not synchronised to the Apple Watch. Open the Watch on the iPhone, select "Wallet", find the corresponding key and tap "Add" to activate the key according to the instructions.

Using the NFC digital key

When using the NFC digital key, enable the NFC function of the mobile phone or wearable device. Here is how to use:

- Carry a mobile phone or wearable device with a valid NFC digital key, put its NFC antenna area close to NFC sensor area on the driver's side mirror, and unlock or lock the vehicle. Consult the manufacturers for details of the NFC antenna area.
- Place the mobile phone or wearable device on the in-vehicle NFC sensor area to obtain the vehicle start permission.




CAUTION

- With permission, start the vehicle as soon as possible. If the vehicle is not started in time, place the mobile phone or wearable device on the in-vehicle NFC sensor area again to obtain the permission.

Removing the NFC digital key

There are three ways:


- Via BYD App:
 - Open BYD App, enter the digital key management page, tap the key to be removed, and enter the operation password to remove it.
- Via the infotainment touchscreen:
 - With a valid smart key inside the vehicle, go to the infotainment touchscreen →  → **Locks** → **Locks** → **Digital Key**. Tap the key to be removed and operate as prompted.
- Via Wallet:
 - Open the Wallet on the phone, select the digital key, and remove it according to the instructions.

Locking/Unlocking Doors

Locking/Unlocking with Mechanical Key

Insert the key into the key hole, turn and remove the key, and pull the door handle to open the door.

- Unlock the driver's door: Turn the key counterclockwise.
- Lock the driver's door: Turn the key clockwise.

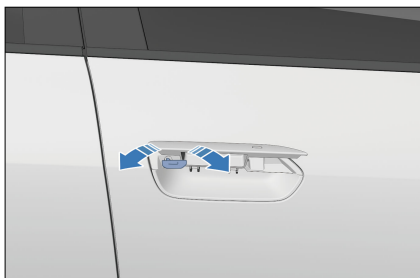


CAUTION

- After removing the mechanical key, pull the driver's door handle to open the door.

Opening with Interior Door Handle

- When the vehicle is unlocked, pull the handle once to open the door from inside the vehicle.
- When the vehicle is locked, pull the handle twice to open the door from inside the vehicle.

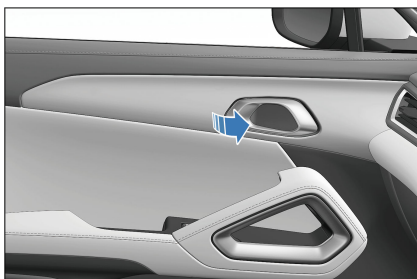

WARNING

- Do not allow children to play with the door handle, so as to avoid door opening while driving.
- If there are children in the vehicle, make sure to enable the child protection lock function.

CAUTION

- The interior door handle is mechanically linked to the door latch and remains operational even when the vehicle is powered off.
- As this vehicle is equipped with a mechanical child protection lock, the rear doors can only be opened with the interior door handle is disabled.

Locking/Unlocking with Smart Key

- The wireless remote control is used to unlock or lock all doors at a close distance, and complete additional functions.
- When you enter the active area while carrying a registered smart key, press the button on the smart key slowly and firmly to lock or unlock all doors.

Locking:

- When all the doors, the boot, and the bonnet are closed, press the lock button to lock all the doors. Check whether all doors are securely locked.
- If the ignition is switched off, the side mirrors fold in* (when side mirror auto fold* is enabled on the infotainment system) with turn signals flashing once.



- If the ignition is switched on, the side mirrors will not fold, the turn signals will not flash, and the alarm will sound once.
- If any door, the bonnet or the boot is not closed, the side mirrors do not fold, the turn signals do not flash and the alarm sounds once.

Unlocking:

- Press the unlock button to unlock all the doors at the same time. The turn signals flash twice.
- When you unlock all the doors with the smart key, even if no door is opened, the interior lights may stay on for 15 seconds and then go out.
- If the anti-theft alarm system is armed, open any door within 30 seconds after unlocking with the smart key. Otherwise, all the doors will lock automatically.
- When the vehicle is equipped with four-door anti-pinch function, pressing and holding the lock or unlock button of the smart key will raise or lower

windows, and pressing it briefly will trigger the lock/unlock function.

Lockout prevention function

- If the key is in the vehicle when the doors are closed and locked, the vehicle will unlock automatically and the turn signals will flash twice.

Finding the Vehicle with Smart Key

- With the anti-theft alarm system armed, pressing the lock button sounds a long beep and makes turn signals flash 15 times. Use this function to locate the vehicle when it cannot be found.
- When the vehicle is in vehicle search mode, press the lock button again. The vehicle enters another search mode.

Raising/Lowering Windows with Smart Key*

- When the ignition is switched off:
 - Press and hold the lock button on the smart key to raise the four windows.
 - Press and hold the unlock button on the smart key to lower the four windows.

WARNING


- When using the remote control function to raise windows, pay attention to the safety of occupants in the vehicle, and use this function only after making sure the windows are clear from pinching anyone.

REMINDER

- To enable or disable key window locking and closing/unlocking and opening functions, go to the



REMINDER

infotainment touchscreen → 
→ **Locks** → **Windows**.

Locking/Unlocking with Microswitch

Locking

- When the ignition is switched off and all doors are closed but not locked, press the microswitch on the front door handle while carrying the smart key. All doors will be locked and turn signals flash once.
- If a door, the bonnet or the boot is not closed, pressing the microswitch will still lock the closed doors, but the horn will only sound once, and the turn signals will not flash.




Unlocking

- When doors are locked, press the microswitch on the front door handle while carrying the smart key close to the activated area. All doors unlock and turn signals flash twice.
- If the anti-theft alarm system is armed, open a door within 30 seconds after the unlocking. Otherwise, all the doors will relock automatically.
- Pressing the microswitch does not work if:
 - This is performed while a door is being opened or closed.

- The smart key is left in the vehicle.

- If the smart key is too close to an exterior door handle or window, it may not be possible to activate the entry function.


Raising/Lowering Windows with Microswitch

- With the ignition off, press and hold the microswitch while carrying the smart key to roll up or down all windows (By default, lifting the window function is activated and lowering the window function is disabled).
- To enable or disable microswitch window locking and closing/unlocking and opening functions, go to the infotainment touchscreen →  → **Locks** → **Windows**.

Locking/Unlocking with NFC Key Card*

Locking doors

- When doors are closed but unlocked, hold the NFC key close to the designated area on the driver's side mirror. All doors can then be locked at the same time. The turn signals flash once when the vehicle is powered off.

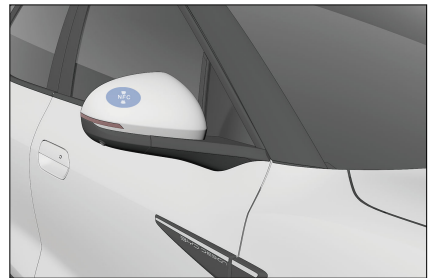

Unlocking doors

- When doors are locked, hold the NFC key close to the designated area on the driver's side mirror. Then all doors can

be unlocked at the same time. The turn signals flash twice.

- Putting the NFC key close to the NFC mark on the side mirror on the driver's side does not work if:
 - This is performed while the door is opened or closed.
- To use the NFC digital key* on the phone, enable the NFC function of the phone and hold the top back part of the phone close to the designated area on the driver's side mirror.

CAUTION

- The keyless start permission lasts for up to four minutes.
- The NFC digital key may not work if phones are off.
- Avoid using the NFC digital key of your phone for extended periods or frequently when it is out of battery or turned off.

REMINDER

- If the anti-theft alarm system is armed, open a door within 30 seconds after the unlocking with the NFC key, or all doors will relock automatically.
- After unlocking by NFC key, the user can start the vehicle without the key in a stipulated period, while this will be disabled after legal locking.

Unlocking the Trunk

Unlocking the boot with smart key

- Double-press the boot release button on the smart key. The turn signals then flash twice.



Unlocking the Trunk with Microswitch

- With the ignition off and the anti-theft alarm system armed, approach and press the rear microswitch while carrying a valid key to unlock the boot.
- When the anti-theft alarm system is disarmed, press the rear microswitch to open the boot.

WARNING


- In order to prevent serious injury, make sure to observe the following precautions:
 - Make sure to alert people nearby of the lid motion.
 - Make sure fingers or other objects are clear from the lid area when it is closing.
 - Make sure the surrounding area is safe when opening or closing the boot.
 - Make sure the boot is properly closed when the vehicle is in motion.
 - Be mindful of windy conditions when opening or closing the boot.
 - The lid may start closing before fully opening. Opening or closing the boot on slopes is more difficult than on level ground. Be mindful of the

WARNING

possibility of the lid to move on its own in such conditions. Before loading or unloading the boot, make sure the lid is fully open and secure.

Emergency Boot Releasing from the Inside

There is an emergency unlocking cover just above the boot lock. Open the cover and pull the emergency unlocking rope or lever to open the boot in an emergency.

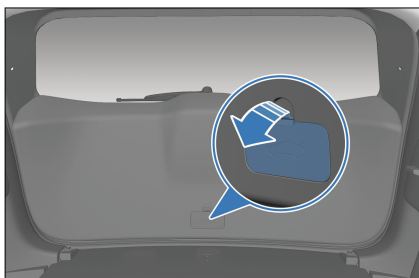

REMINDER

- When the vehicle is powered off, the boot lid can be unlocked from the inside in case of emergency.

Locking/Unlocking with Central Locking

Locking or unlocking with central locking

See **P68** in "Driver's Door Switches" in this chapter.

Locking or unlocking doors automatically

- All doors automatically lock at vehicle speeds above 5 mph (8 km/h).

- Press the START/STOP button to switch the ignition off and then all doors are unlocked automatically.

Locking/unlocking all doors concurrently

- When the vehicle is not in anti-theft mode, the backlight of the central locking button turns on if the vehicle is locked and turns off if the vehicle is unlocked.
- Pressing the central lock button locks all doors so that any attempt to open any door from the outside fails. At this time, pull the interior handle to unlock a door and pull a second time to open it.

REMINDER


- All doors unlock automatically when the vehicle suffers a strong impact, depending on the impact intensity and accident type.

Emergency Vehicle Locking with Mechanical Key

When the central locking system or the smart key fails, use the mechanical key for emergency locking or unlocking.

Locking

1. Remove the mechanical key from the smart key.
2. Open all doors other than the driver's door and move down the slider with the mechanical key as shown. You can then lock the doors by closing the them.

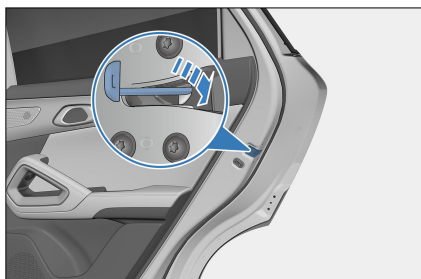

3. After locking the three doors, open the driver's door.
4. Insert the mechanical key into the keyhole, turn it counterclockwise as far as it can go, return it to the initial position and pull it out (see Locking/Unlocking with Mechanical Key in this Chapter).

Unlocking

1. Remove the mechanical key from the smart key.
2. Insert the mechanical key into the keyhole, turn it clockwise as far as it can go, return it to the initial position and pull it out.
3. Pull the interior handle twice to unlock the three other doors.

REMINDER

- Prevent excessive force from distorting or breaking the key during the operation.

Smart Access and Start System

Use the smart key to unlock or lock the vehicle doors and start the vehicle.

Access


Use the smart key to unlock or lock the vehicle doors (see **P47**).

Start-up

With the smart key inside, press the brake pedal and the START/STOP button to start the vehicle (see **P100**).

Antenna positions

- ① Interior antenna
- ② Exterior antenna

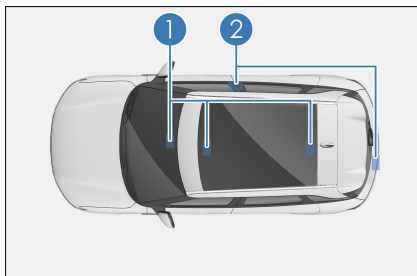


Active area

The smart access and start functions take effect only when the registered smart key is within the active area.

- ① Active area of the access function: about one meter from the front door handle and the exterior boot switch.
- ② Active area of the start function: inside the cabin.

If another smart key is near this vehicle's smart key, unlocking may take longer than usual, which is normal.

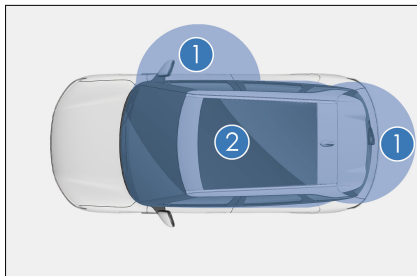

! REMINDER

In the following situation, smart access and start system may not work normally:

- There is a strong electromagnetic field nearby, such as TV towers, power stations, and broadcasting stations.
 - The smart key is being carried along with a communication device, such as a two-way radio or mobile phone.
 - The smart key is in contact with or covered by a metal object.
 - The door handle is operated too quickly.
 - The smart key is too close to the handle.
 - Another wireless remote control function is being used nearby.
 - When the smart key battery runs out.
 - The smart key is close to high-voltage equipment or equipment that produces noise.
 - The smart key is being carried along with another smart key or radio-wave-emitting device.
 - Even within the active area, the smart key may not work properly in certain locations, for example, on the dashboard, in the glove box, or on the floor.
- If the smart access system is not working properly and it is impossible to enter the vehicle, the mechanical key can be used to lock/unlock the driver's door, or the wireless remote control function can be used to lock/unlock all doors.

- Pressing the START/STOP button may not enable the start function due to:
 - Smart key failure. If the smart key warning light comes on and a message ("Low key battery, please replace the battery soon") is displayed on the instrument cluster, the battery of the key may be exhausted.
 - If the smart access and start system cannot work properly due to system failures, bring all smart keys to a BYD authorised dealer or service provider for repair.

Saving battery power


- The smart key communicates with the vehicle even when the vehicle is not running. Therefore, do not leave the smart key in the vehicle or within two meters from the vehicle.
- Receiving strong electromagnetic waves for a long time drains the battery of the smart key quickly. The smart key must be kept at least 1.1 yd (1 meter) away from electrical equipment that generates a magnetic field, such as the following devices:
 - Television
 - Personal computer
 - Phone charger
 - Electroliers
 - Fluorescent desk lamp

Child Protection Lock

Child protection locks are designed to prevent children in rear seats from accidentally opening rear doors. Such locks are provided on the sides of the left and right rear doors.

- ① Locking
- ② Unlocking

The door cannot be opened from inside the vehicle while the latch is locked. Use the exterior door handle to open this door.

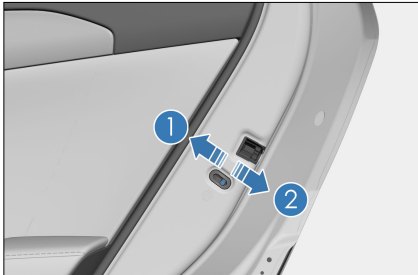

WARNING

- Before driving, especially when a child is in the vehicle, ensure that the doors are closed and the child protection lock function is enabled.
- Proper use of seat belts and the child protection lock helps prevent the driver and passengers from being thrown out of the vehicle in the event of an accident, and prevent the doors from being opened accidentally.

Seats

Seat Precautions

- Adjust the driver's seat so that the pedals, steering wheel, and dashboard controls are within the driver's easy control.
- While driving, the most effective safeguard is to keep the seatback upright, always rest well on the seatback, and adjust the seat belt to the right position.

- Do not fold or unfold the rear seats when the vehicle is in motion.
- Secure your luggage appropriately to prevent it from skidding or moving. Luggage in the vehicle should not be higher than seatbacks.
- The head support can only protect your head when it is in the proper position. Remember to adjust it to the proper position if it has been moved.

WARNING

- Sitting on a folded seatback or on cargo is prohibited. Improper seating position or improperly fastened seat belts can result in personal injuries in case of emergency braking or a collision.
- Do not place any items under the seats. The driver may lose control of the vehicle because items placed there affect the seat locking mechanism, causing the seat to move suddenly.
- When adjusting the seat, do not place your hand under the seat or near its operating parts to prevent being crushed.
- After adjusting the seatback, lean back to confirm the seatback is locked. Seatbacks that are not fully locked can cause personal injuries in an accident or emergency braking.
- Do not put the seatback down while driving or riding in the vehicle. This makes the shoulder strap of the seat belt not properly attached to the body. As a result, occupants in the vehicle could hit the strap in an accident, causing injuries to the neck or other parts; or they may slip out of the waist

WARNING

belt, resulting in other serious injuries.

- Do not adjust the driver's seat while the vehicle is in motion, as unpredictable seat movement can cause the loss of vehicle control.
- Do not drive the vehicle until occupants are seated properly.

CAUTION


- When folding seats, make sure no seat belt is damaged.
- Adjust the seat position before fastening the seat belt.
- While adjusting a seat, do not let it hit against any passenger or the luggage.

Adjusting Front Seats

Adjusting Front Seat with Power*

Power front seat adjustment includes seat position adjustment, cushion height adjustment*, seat base angle adjustment*, and seatback angle adjustment. Choose the following methods according to the actual configuration of your vehicle.

- ① Seat position adjustment switch
 - Toggle the seat position adjustment switch back or forth to move the seat backward or forward.
 - Move the front end of the switch up or down to adjust the seat base angle.
 - Move the rear end of the switch up or down to adjust cushion height.

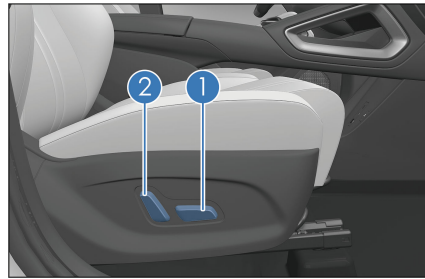



② Seatback angle adjustment switch

- Toggle the upper end of the seatback angle adjustment switch to adjust the seatback angle.

CAUTION

- Releasing the switch stops the seat in this position. Do not place anything under the seat as this may prevent the seat from operating.

Heating System*


- To access the heating screen, tap the infotainment touchscreen → .
- Go to the infotainment touchscreen →  → **Vehicle** → **Seats**.
- Find the seat heating setting button from the drop-down menu on the infotainment homepage.

Heating adjustment

- Seat heating: On the infotainment touchscreen, tap the seat heating icon to control the heating level.
 - Tap to select the operation mode among level 1, level 2, and OFF.
 - Switch to OFF to disable seat heating.

Folding Rear Seats

- Flipping and lowering the seatback
 - Pull the cord to straighten the seatback.
 - Push the seatback forward/backward to fold it. You can fold the seatback forward until the back touches the cushion, or you can fold it backward until reaching the locking position (with a locking click).

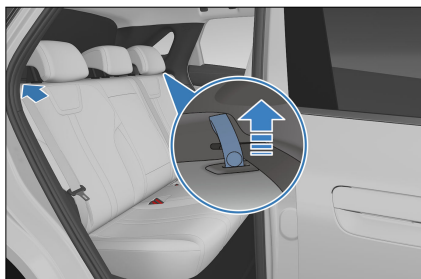

! REMINDER


- Fold or unfold the rear seats at a moderate speed. Avoid quickly lowering or pulling up seatbacks to prevent damage to or malfunction of rear seats and the seat belts.
- When unfolding a rear seat, do not push the seatback hard; otherwise, the seatback will be pre-stressed and impossible to unlock.
- When unfolding a seatback, check that the buckle position is proper to expose the reserved opening on the seat.
- Do not turn over the seat when the seat belt latch is inserted into the buckle.

Head Supports

- Lifting a head support

Lift the head support to a proper position, and release it after hearing a locking sound.
- Lowering a head support

Press and hold the head support adjustment button, lower the head support to a proper position, and then release the button after hearing a locking sound.

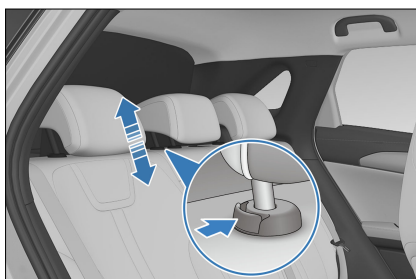

- Removing a head support

Press and hold the head support adjustment button, remove the head support, and release the button.
- Installing a head support

Insert the head support post into the bushing with the grooves facing forward. Press and hold the head support adjustment button, lower the head support to a proper position, slightly lift the head support and release the button after hearing a locking sound.

! REMINDER

- Head supports protect vehicle occupants from head and neck injuries. Adjust the head support so that its centre aligns with the back of your head for

! REMINDER

maximum protection. Adjust the head support to the proper position based on your actual height.

- When adjusting head support height, align the occupant's ear tip line with the centre line of the head support.
- After the adjustment, press down the head support to make sure that it is locked.
- Do not drive the vehicle without head supports.

! REMINDER

- Do not attach any objects to the head support levers.

Steering Wheel

Steering Wheel Switches



- 1 Distance -
- 2 Distance +

- 7 Right
- 8 Scroll button

- 3 Rocker switch
- 4 ACC
- 5 AVM*
- 6 Driving information

- 9 Instrument cluster/Back
- 10 Call
- 11 Speech recognition
- 12 Left

Left-hand buttons

Rocker switch

- Reset+ Restores the speed stored before exiting from the cruise system last time.
- Setup -: Sets the current speed to the target cruise speed.

Distance +

- Increases the time-based following distance from the vehicle ahead by one level each time when it is pressed with ACC active. A total of four levels are available.

Distance -

- Decreases the time-based following distance from the vehicle ahead by one level each time when it is pressed with ACC active. A total of four levels are available.

Cancel

- Press this button to change the cruise control mode from active to standby.

AVM*

- Enables or disables automatic vehicle monitoring (AVM).

Driving information

- Press this button to switch the driving information interface. Press and hold to clear the relevant driving information.

Right-hand buttons

Scroll button

- Adjusting infotainment system volume when the instrument cluster is not in menu mode:
 - Roll the button upward to increase the volume. The button is non-operational when the volume reaches the highest.
 - Roll the button downward to decrease the volume. The button is non-operational when the volume reaches the lowest.
 - Press down the button to mute.
- When the instrument cluster is in menu mode:
 - Roll the button upward to select the upper level-2 or level-3 menu items.
 - Roll the button downward to select the lower level-2 or level-3 menu items.
 - Press down the button to go to the next-level menu or confirm the current setting.



CAUTION

- The infotainment system is muted once the instrument cluster is set to the menu mode. To adjust infotainment system volume, exit the instrument cluster menu mode first.

Left/Right button

- When the infotainment system is in radio mode:

- Press ◀ to select previous radio station.
- Press ▶ to select next radio station.
- When the infotainment system is in USB/Bluetooth music/third-party music app/other modes:
 - Press ◀ to play the previous track (track number -1).
 - Press ◀ to select a record upward on the Bluetooth call record or phonebook screen.
 - Press ▶ to play the next track (track number +1).
 - Press ▶ to select a record downward on the Bluetooth call record or phonebook screen.
- In the menu mode:
 - Press the ◀ button to switch to level-1 menu and its submenus on the left.
 - Press the ▶ button to switch to level+1 menu and its submenus on the right.

Instrument cluster/Back

- When the instrument cluster is not in the menu mode, press Instrument cluster/Back to show the instrument cluster menu.
- When the instrument cluster is in menu mode, press this button to return to the upper-level screen, or to exit the menu if there is no upper-level screen.
- When on the Bluetooth call screen, press this button to end the call.

Call

- Press this button to make or receive a call. The audio system is muted at the same time.

- When a Bluetooth-unrelated screen is currently displayed, press this button to switch to the phone selection screen if Bluetooth is disconnected, or to the Dial screen if Bluetooth is connected.
- After entering a phone number on the Dial screen or selecting a record on the Call Log or Contacts screen, press this button to dial the number.
- When Bluetooth is connected, but no phone number is entered on the Dial screen, press this button to switch to the call log screen. Press this button again to call the first dialed number on the call history.

Speech recognition

- Press this button. The voice recognition screen is displayed and you can say the desired voice command.
- Press a second time to exit speech recognition.

Horn

- Press the horn button area to honk the horn, and release to stop honking.



CAUTION

- Avoid pressing honking for too long, as the horn may be damaged.



REMINDER


- Observe the traffic laws and use the horn properly.

Adjusting the Steering Wheel

Adjusting the Steering Wheel Manually

To adjust the steering wheel position, hold it and operate as follows:


- Press the steering wheel adjustment handle, move the steering wheel to the desired angle, or adjust it to the desired axial position, and restore the handle to the locked position.

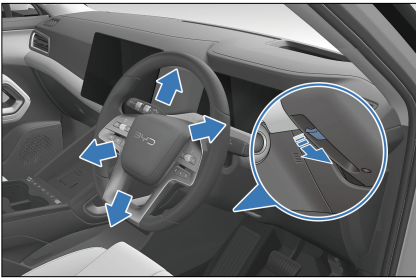

WARNING

- Never adjust the steering wheel while driving, as this is under risk of impaired vehicle control, which can lead to accidents.
- After adjusting the steering wheel, move it up and down to verify that it is securely locked.

Steering Assist Mode Settings


- The steering feel varies from person to person, and so do the evaluation and needs for this feel.
- To set the steering mode, go to the infotainment touchscreen →  → **Vehicle** → **Driving Control** → **Steering Assist Mode**, and select **Comfort** or **Sport**.

REMINDER

- Setting the steering mode to sport mode is suggested if the steering wheel feels light when the vehicle is running at a high speed.

Steering Wheel Heating*

Enable steering wheel heating by any of the following methods:






1. Enable or disable steering wheel heating on the infotainment touchscreen →  → **Vehicle** → **Seats**.
2. Go to the drop-down shortcut menu, and tap the steering wheel heating icon to turn on or off the heating.
3. Voice control: activate the voice control to enable or disable steering wheel heating.

Wipers


Wiper Switch


Windshield Wipers and Washer

Front wiper

- The lever is used to control the windscreen wipers and washer. It has five modes:
 -  : Front wiper motor
 -  : Auto/Intermittent wipers level 1
 -  : Auto/Intermittent wipers level 2
 -  : Continuous, slow
 -  : Continuous, fast

- Toggle down or up the rocker switch on the rear side of the lever to select a mode.

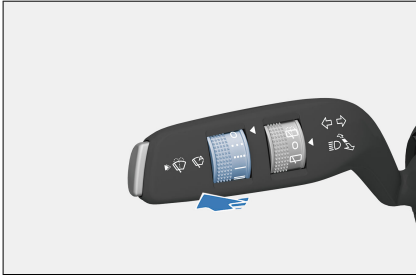

- You can enable the auto wiper function on the infotainment touchscreen by tapping  → **Vehicle** → **Comfort Driving**. Once enabled, the wipers will swipe once and then switch to the auto mode, adjusting based on rain intensity.
- In auto mode, toggle down or up the rocker switch on the rear side of the lever to select a mode.

WARNING

- If the ignition is on, and the wipers are set to auto mode, touching or wiping the glass on the sensor area may activate the wipers and cause an accident.


CAUTION

- Turn off the automatic mode of wiper during the vehicle washing process, in dry seasons or in rainless weather to prevent inadvertent wiper operation.
- When the wiper stops midway for snow accumulation and other reasons, please turn it off, park the vehicle in a safe place, and remove the snow and other

CAUTION


debris, so that the wiper can work properly.

- The sensor may occasionally fail to properly identify snowflakes on it as they have various shapes, which could lead to wiper malfunction. After the snow has melted, it may result in automatic wiping of the wiper.
- To activate the point-wiping mode, gently press the button once on the end of the lever to mode 1. The wipers wipe at a low speed until you release the lever.

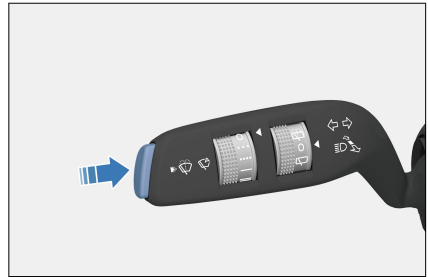




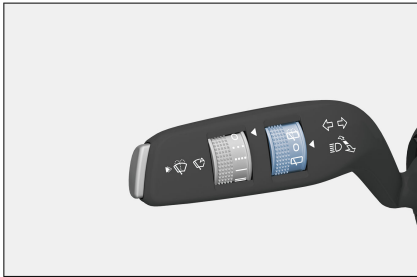
Front windscreen washer

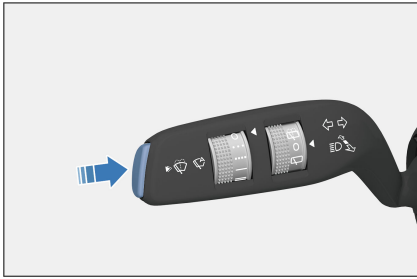
- To clean the front windscreen, fully press the button on the end of the lever to mode 2 so that the washer sprays washing fluid and the wipers operate.
- When the stick is released, or when it is held for over 10 seconds, the washer spray stops, and the wipers stop after operating for 1–2 cycles.



Rear Wiper

- Set the rear wiper switch to  to enable the intermittent rear wiper function.
- Set the rear wiper switch to  or open the boot to stop the rear wiper.
- Set the rear wiper switch to  and hold it to activate the rear wiper and washer simultaneously.



- Set the rear wiper switch to  and release it. The wiper will operate once or twice after washing fluid has been sprayed.

CAUTION

- Check and clean the wiper blades at regular intervals.
- Do not start the wipers while rain is starting, as the windscreen cannot be cleaned and rainwater mixed with sand and dust may instantly blur your view, affecting driving safety.

CAUTION

- When the wiper stops midway for snow accumulation and other reasons, please turn it off, park the vehicle in a safe place, and remove the snow and other debris, so that the wiper can work properly.
- Use cleaning agent for glass. The use of water, or another type of detergent, may damage the washer motor.
- Do not operate the washer for over 10 seconds, or when the washer fluid tank is empty, as those may cause motor overheating or damage.

Wipers


Inspect wiper blades for cracks or partial hardening at least every six months. If they are noted, replace wiper blades. Otherwise, the windscreen will streak or will be left unclean after wiping.

CAUTION

- Do not open the bonnet when the wiper arms are pulled up, as this may damage the bonnet and wiper arms.

Replacing Wiper Blades


When the vehicle is powered on, enable or disable front wiper check function on the infotainment touchscreen →

 → **Service** → **Overhaul** → **Front**

Wiper Check. When the corresponding wiper check function is enabled, the wipers rotate out automatically for easy maintenance and replacement.


Replacing front wiper

1. Pull up the wiper arm at the driver side, and then pull up the other at the passenger side.
2. Press the wiper lock button ①.
3. Hold the wiper blade and pull it out along the indicated direction ②.
4. When installing a new wiper blade, follow the reverse procedure.

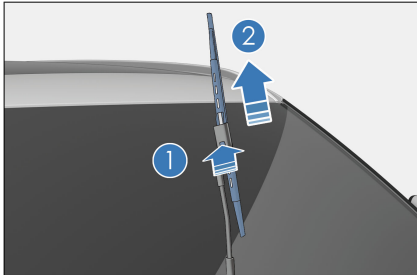

Replacing rear wiper

1. Pull up the wiper arm.
2. Hold the wiper in position ①, and pull the blade out along the indicated direction ②.
3. When installing a new wiper blade, follow the reverse procedure.

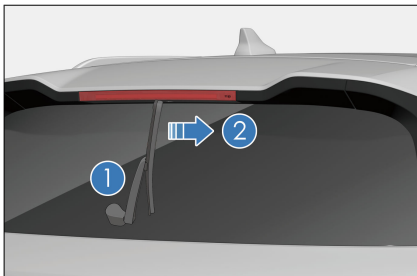

! CAUTION

- Do not open the bonnet when the wiper arms are pulled up, as this may damage the bonnet and wiper arms.


! CAUTION

- Lower the wipers slowly and avoid direct impact onto the windscreen.
- Do not bend the wiper blade, and do not obstruct the wiper blade when the wiper is in operation.
- When replacing the wiper blade, after raising the wiper arm, hold it steady and gently lower it after replacing the wiper blade. Otherwise, before the wiper blade is installed, any external force could make the wiper arm snap back on the glass and risk breaking it.

Side Mirrors

Interior Rearview Mirror

Move the interior rearview mirror up, down, left, or right to a suitable position.

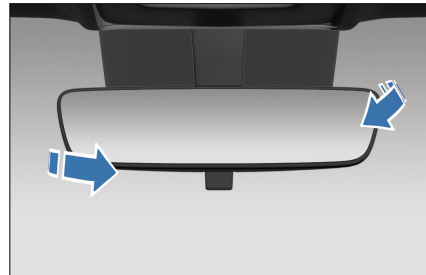

! WARNING

- Do not hang heavy objects from the interior rearview mirror, or shake or drag it with force.
- When manually adjusting the interior rearview mirror, do not

WARNING


forcibly adjust the stuck mirror, to prevent the mirror from falling off.

- Adjust the interior rearview mirror before driving. Do not adjust the rearview mirror while driving. This may distract your attention, causing personal injury or death from accidents.

Manual Anti-glare Interior Rearview Mirror

The manual anti-glare interior rearview mirror is designed with the normal mode and anti-glare mode:

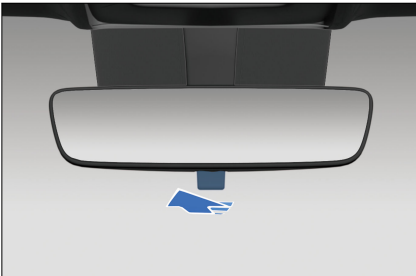


- Normal mode — rotate the control stick towards the rear of the mirror to get the clearest mirror image.
- Anti-glare mode— pull the control stick towards the front of the mirror to effectively reduce interference from headlights of rear vehicles at night. Note that anti-glare may lower the clarity of rear visual field.



Side Mirrors

Side Mirror Adjustment


Use the associated switches to adjust the side mirrors to see the sides of the vehicle.


- Selection switches: selects the side mirror to be adjusted.
 -  : Left side mirror button
 -  : Right side mirror button
- Side mirror adjustment buttons  : Press this button to adjust the side mirror lens to an appropriate position.



Folding Side Mirrors

- **Folding side mirrors manually***
 - Push the outer edge of a side mirror to rotate it around the folding axis to the locked position.

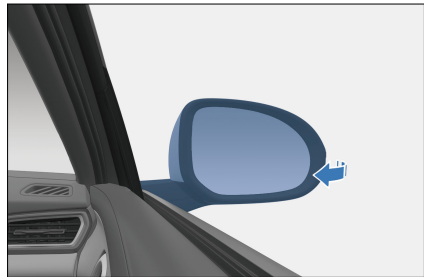

- **Folding side mirrors with power ***
 - Fold switch  : Press it to fold the side mirrors with power. Press again to unfold the mirrors.
 - Both side mirrors fold automatically when the anti-theft alarm system is armed, and extend automatically when disarmed.

- To enable or disable side mirror auto fold, go to the infotainment touchscreen → ⚙️ → **Vehicle** → **Comfort Driving**.

! WARNING

- Adjust the side mirrors before driving. Do not adjust the rearview mirrors while driving. This may distract your attention, causing accidents.

! REMINDER

- Do not operate the controller or scrape the surfaces of frozen side mirrors. Use de-icer spray to remove the ice.

Side Mirror Defrosters*

Tap this button on the A/C operation interface to activate the function, and the heating panel in side mirrors will quickly clear the side mirrors.

! REMINDER

- Using the side mirror electric heating defrosting function for a long time may cause the mirror to wear out faster. Turn off the defrost button when it is not needed.

Switches


Light Switches

- The auto light, position light, low beam, rear fog light and daytime running light can be controlled on the infotainment system.

- To turn off the auto light, position light, low beam, rear fog light and daytime running light, go to the infotainment touchscreen → ⚙️ → **Light** → **Exterior Light**.


Turn signals

- Push up the lever to turn on the right turn signal and push down the lever to turn on the left turn signal.

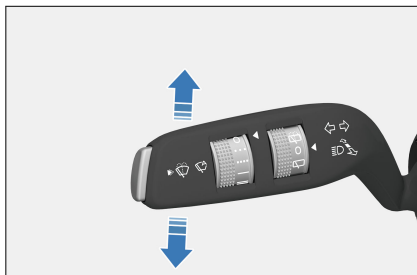

High beam

- When the auto light or low beam function is activated in the infotainment system, push the lever to turn on or off the high beams.
- Push the lever forward (away from the steering wheel) to turn on the high beams and then they are solid on.
- Pull the lever back (close to the steering wheel) and the high beam flashes. Release the lever for the light switch to automatically reset and the high beams turn off.

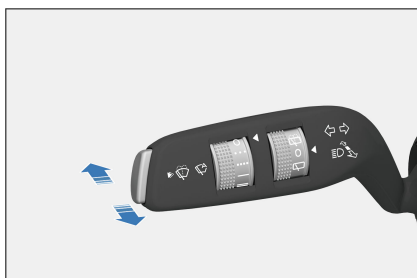





REMINDER

- The light intensity sensor is located on the top of the windscreen. Do not block the sensor or let anything splash on it.


Auto light off

- Conditions to activate the auto light off function: To activate this function, set the light switch to "Position Light" or "Low Beam" and switch off the vehicle power.
- When the auto light off function is activated, the headlights, position lights, rear fog lights, and high beams turn off in 10 seconds if the driver's door is closed.
- When the auto light off function is activated, the headlights, position lights, rear fog lights, and high beams turn off in 10 minutes if the driver's door is open.
- After the lights turn off automatically, if the light status changes, these lights come on in the new status. If the conditions to activate the auto light off function are still met, the function is activated again.
- Disabling the auto light off function: When the vehicle is powered on, the auto light off function is disabled, and the light switch can be operated normally.
- If the auto light off function has turned off the lights and the anti-theft alarm system has been armed, disarming the alarm system makes the lights come on again automatically. If the driver's door remains closed, the lights go off again after 10 seconds. But if any door is open, it turns off the lights in 10 minutes.

Headlights after exit and headlights before enter

- Headlights after exit:
 - Set the time for "Headlights after Exit" on the infotainment touchscreen →  → **Light** → **Courtesy Light** (default: 10 seconds). With the light adjustment switch turned to "AUTO", "Position Light" or "Low Beam", when you power off the vehicle, lock four doors and attempt to leave the vehicle, the corresponding lights will continue to light up for 10 seconds (or the set time) to provide coming-home lighting.
- Headlights before enter:
 - Set the time for "Headlights before Enter" on the infotainment touchscreen →  → **Light** → **Courtesy Light** (default: 10 seconds). With the light adjustment switch turned to "AUTO", "Position Light" or "Low Beam", when you unlock the vehicle and attempt to approach it, the corresponding lights will light up for 10 seconds (or the set time) to provide the leaving-home lighting.


Headlight Height

- To adjust headlight height, go to the infotainment touchscreen →  → **Lights** → **Exterior Light**.

Driver's Door Switches

Power Window Switches

- When the ignition is on, the window switches can be used to roll up or down windows.
 - Press the window switch to roll the window down.
 - Pull up the window switch to roll the window up.

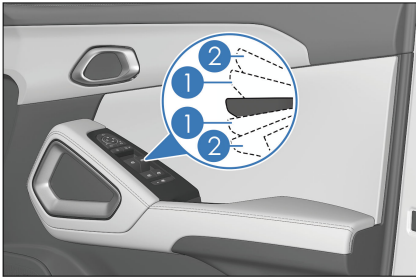

Manual operation

- Press or pull a window switch to position ① and hold to lower or raise the associated window. Release the switch to stop the window where you want it.

Auto lifting

- Press or pull a window switch to position ② and release to automatically lower or raise the associated window. During the process, operate the switch in any direction to stop the window midway.

Anti-pinch function*

- If someone or an object is caught by the window when it is rolling up, the window stops and rolls down automatically.

Anti-pinch initialisation

- Pull the switch to close the window, then release immediately. Repeat the first step and hold the switch for at least 400 ms.

WARNING

- Never deliberately activate the anti-pinch function with any part of your body.
- Follow the precautions below to prevent serious injuries or death from window closing:

WARNING

- Before operating the power windows, ensure that all passengers do not have any body parts that can be caught in the window.
- Do not allow a child to operate the power windows.

CAUTION

- Excessively frequent activation of the anti-pinch function can activate the regulator motor's overheat protection.
- The anti-pinch function may not work if an object is jammed into the window when it is almost completely closed.
- If the low-voltage battery is disconnected while a window is being rolled up or down, the automatic rolling-up and anti-pinch functions both cease to work.
- Contacting a BYD authorised dealer or service provider for maintenance is recommended if the windows' automatic closing function or anti-pinch function is not working normally.

Delay function*


- After the vehicle is powered off, if the front doors are not open, the four-door window controller has a roll-up/down delay period of 10 minutes. During this period, the windows can still be rolled up and down. If either of the front doors is opened during this period, the delay function is cancelled, and the switches can no longer be used to operate the windows.

WARNING

- Before closing a power window, ensure occupants' hands are not placed upon the window glass; pinching of hands or fingers can result in serious injuries.

Window Lock Button

- Pressing this button deactivates the window switches on the rear row. The window switches on the sides of the driver and the front passenger remain operational.
- Press the switch a second time. The indicator goes out, and the window switches on the rear row work normally.

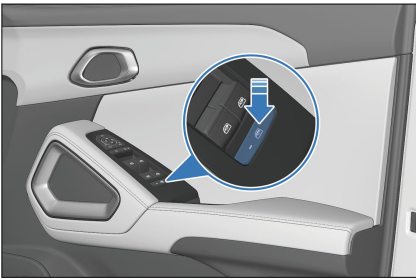

Central Locking


The driver's door is equipped with power door lock switches. Both switches can lock or unlock all doors.

① **Locking**

Press the central lock button. All doors are locked and the red lock indicator lights up.


② **Unlocking**

Press the central unlock button. All doors are unlocked and the red lock indicator turns off.

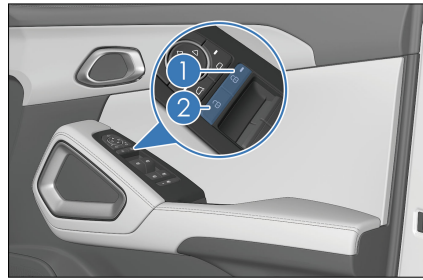

Window Control Switch on Passenger's Side

When the ignition is on, use the front right and rear door window switches to operate the respective windows.

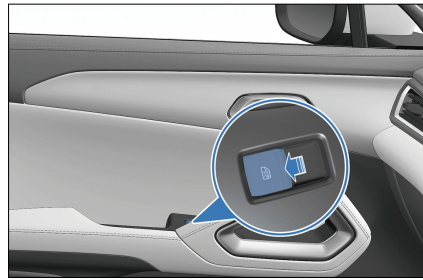


Mode Switches

① **Driving mode adjustment lever**

- Available driving modes include economy mode (ECO), sports mode (SPORT), normal mode (NORMAL), and snow mode. Using the stick to choose among different modes tailored to your specific needs.

② **Regenerative braking mode button**

- Press the button to enable the high regenerative braking mode.
- Press again to enable the standard regenerative braking mode.

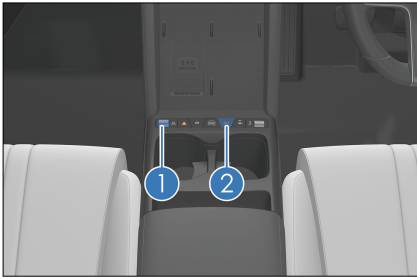

⚠ CAUTION





- Shutting down the ESC system may help if the motor performance is degraded in soft snow conditions by the activation of dynamic stability control. The ESC system must be restarted after conditions are back to normal.

Front Passenger Airbag Switch

- The front passenger airbag can be activated or deactivated with a front passenger airbag switch.
- The switch is located on the passenger's side of the dashboard and is accessible when the passenger's door is open.



- The front passenger airbag indicator is located on the ceiling.

- Check that the switch is in the required position.
- Enable or disable the front passenger airbag according to the use of the front passenger seat:
 - When the switch is ON, the front passenger airbag is activated. The front passenger airbag indicator "PASSENGER AIRBAG" is solid on, "ON" and  come on, and "OFF" and  are off. The front passenger airbag deploys in the event of a moderate to severe collision that meets the necessary deployment conditions.
 - When the switch is OFF, the front passenger airbag is deactivated. The passenger airbag indicator "PASSENGER AIRBAG" is solid on, "ON" and  are off, and "OFF" and  come on. The front passenger airbag do not deploys in the event of a moderate to severe collision that meets the necessary deployment conditions.

⚠ WARNING

- Never use a rear-facing child restraint on the front passenger seat with an activated passenger airbag. Failure to do so can result in serious personal injuries or death.
- When the front passenger seat is occupied with an adult, the passenger airbag switch must be turned to "ON" to always keep the front passenger airbag active.
- If the front passenger airbag remains active when the front passenger airbag switch is off, immediately contact a BYD



WARNING


authorised dealer or service provider.

CAUTION

- To prevent damage to the airbag system, operate the front passenger airbag switch when the vehicle is on "OFF".
- It is the driver's responsibility to confirm that the front passenger airbag switch is in the correct position for the person sitting in the front passenger seat.

Hazard Warning Light Switch

When the  button is pressed, all turn signals and turn signal indicators on the instrument cluster start flashing. They all stop flashing when the  button is pressed again.

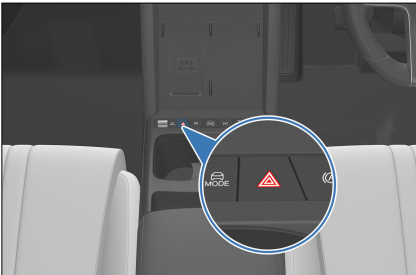

CAUTION

- The hazard warning lights are used to alert drivers and pedestrians of possible risks of dangerous accidents.

Emergency Call (E-Call)

- E-Call* refers to emergency call. Pressing and holding the SOS button for 0-10 seconds triggers the E-Call system manually, and pressing and holding the button for 10-20 seconds does not.
- To cancel an emergency call made by mistake, press the SOS button a second time within five seconds.



- The E-Call system activates automatically in the event of airbag deployment.
- When triggered, the system automatically makes an emergency call and communicates the related vehicle and accident information to a public safety answering point.

CAUTION

- If pressed and held for over 20 seconds, the SOS button will be considered to be short-circuited (stuck). In that case, E-Call cannot be triggered manually.
- The dialed emergency call cannot be cancelled manually. The E-Call system will begin 60-minute callback time after the call is hung up by the public safety answering point or is not answered when it has been dialed 10 consecutive times.


Status	LED Indicator	Beeping
Ignition off or E-Call system failure	Off	\
Power-on self-check mode	Flashing fast - 2 Hz	\
Ignition on and self-check passed	Solid on if self-check is passed	\
E-Call connecting	Flashing - 1 Hz	A beep
E-Call connected	Flashing - 1 Hz	A beep
E-Call ended	Solid on	Two beeps after E-Call ends
Callback time (60 minutes by default)	Flashing extremely slowly - 0.2 Hz	\

Panoramic Canopy*

Opening/Closing the Sunshade*

Opening the sunshade

- Touch and hold the sunshade open button ① to open the sunshade manually. Releasing the button stops the sunshade midway.
- Briefly touch the sunshade open button ① to open the sunshade automatically. Touching button ① or ② in this process stops the sunshade midway.

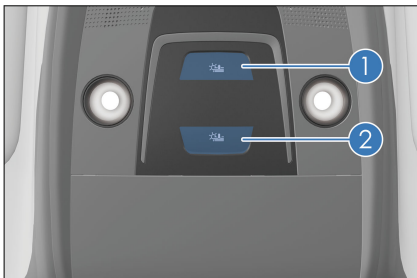

Closing the sunshade

- Press and hold the sunshade close button ② to close the sunshade.

Release the button midway to stop the sunshade at its current position.

- If the sunshade has been initialised, releasing the button ② immediately after touching it closes the sunshade automatically. For the sunshade to stop at its current position, press button ① or ② midway.

CAUTION

- When opening or closing the sunroof sunshade, avoid forceful contact with its curtain to prevent damage.

Initialisation

- With the ignition on, try the following steps for initialisation:
 - Press the close button to the fully closed position and hold on for at least 0.5 seconds to initialise the sunshade.
 - If the sunshade does not close fully, calibrate manually. Press and hold the sunroof/sunshade close button, and release it when the sunroof/sunshade stops moving. Hold the button again for at least seven


seconds, and release it until the sunroof/sunshade is fully closed and a click sound is heard.

Interior Light Switch


Front Interior Lights

In any ignition status, touch the cover of front interior lights to turn on the lights.

Configuration 1

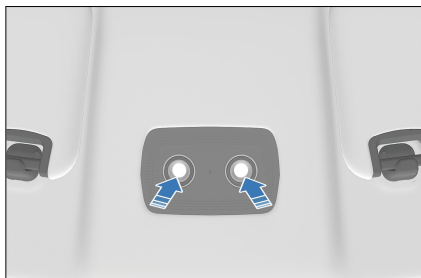

Configuration 2

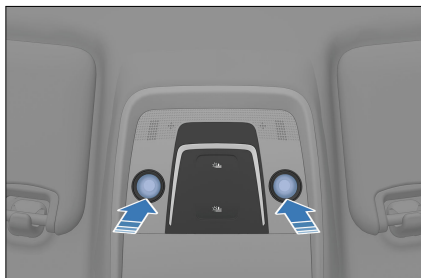

! REMINDER

- In any ignition status, while "DOOR" option is selected and any door is open, interior lighting switches between high and low brightness with touches on the light switch.
- With the ignition off and "DOOR" option selected, interior lights will go off after the door have

! REMINDER

remained open for a period of time.


Side Interior Lights*

- With the vehicle in any power mode, press this button to turn on the left/right interior light.
- Press again to turn off the left/right interior light.



Rear Interior Lights*

- Touch button ① to turn on the left light. Touch button ① again to turn it off.
- Touch button ② to turn on the right light. Touch button ② again to turn it off.

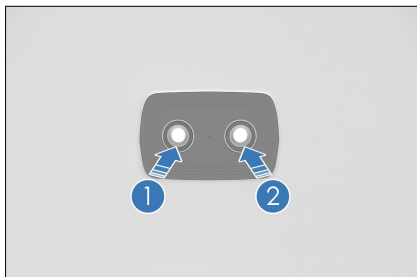

04

USING AND DRIVING

Charging/Discharging Instructions	74
Batteries.....	88
Usage Precautions.....	93
Starting and Driving.....	100
Driver Assistance.....	110

Charging/ Discharging Instructions


Charging Instructions

Charging Safety Warnings

- Charging equipment uses high-voltage current. Minors are prohibited to charge the vehicle or touch the charging equipment. Keep them away from the vehicle during charging.
- Charging may affect medical or implanted electronic devices. Consult the device manufacturer before charging.
- Charge the vehicle in a safe environment, and avoid charging in damp areas, or areas with fire or heat sources.
 - Protect the charging equipment against water contact on rainy days.
- Use charging equipment that complies with local standards.
 - To avoid charging failure or fire, do not modify, disassemble, or repair the charging equipment and related ports. Contact a BYD authorised dealer or service provider if there is a fault.
 - Ensure the quality of charging equipment.
- Before charging:
 - Ensure that the power supply equipment, the charging connector, the charge port, and the charging connection device are free of defects, such as cable wear, rusted ports, cracked casings, or foreign objects in the ports.
 - Do not charge the vehicle when the plug of the charging connector or port, the socket, or metal terminals are loose or damaged by rust or corrosion.
 - When the charging connector, the port, the power plug, or the socket is visibly stained or damp, wipe them with a dry and clean cloth to ensure the connection is dry and clean.
- Ensure that your hands are dry before charging to prevent risk of personal injuries.
- If anything abnormal is found in the vehicle or the charging equipment during charging, stop charging immediately and contact a BYD authorised dealer or service provider.
- Always observe the following charging precautions to prevent damage to the vehicle:
 - Do not shake the charging connector, otherwise the vehicle charge port may be damaged.
 - Whenever possible, do not charge the vehicle in a thunderstorm, under risk of lightning strikes.
 - Do not open the bonnet for maintenance while charging.
 - After charging, do not disconnect the charging equipment with wet hands or while standing on any wet surface.
 - Before driving, ensure that the charging equipment is disconnected from the charge port.

Compatibility of vehicle and charging infrastructure*

- The signs are located on the vehicle's charging socket, components of the local charging infrastructure (charging stations and sockets) and on the charging cable.

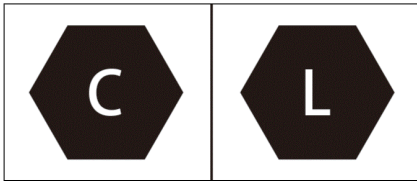

The signs refer to standardised charging systems in accordance with DIN EN 62196.

Charging Precautions

- When the State of Charge (SOC) bar on the instrument cluster turns red, the high-voltage battery is about to be exhausted. Please charge it immediately, otherwise the service life of the high-voltage battery and your driving experience will be affected.
- Mode 2 charging means charging with an AC charging connector that complies with local standards. It is recommended to use the dedicated AC lines and power sockets meeting local standards to avoid line damage and protective trip due to high-power charging, affecting the normal use of other equipment.
- Observe the following to prevent damage to the charging equipment (charging equipment precautions):
 - Prevent the charging equipment from any mechanical impact, such as falling and colliding with other objects.
 - Do not place the charging equipment near heaters or other heating sources.
 - Never drop the equipment or move it by pulling it directly by the cable. Take caution when moving the equipment.
- Before charging:
 - Make sure that the charging connector and the charge port are free of foreign objects, and that the protective cap of the charging connector terminal does not get loose or deformed.
- Hold the charging connector, align the connector with the charge port and push it in, making sure that they are properly connected.
- When charging is complete:
 - Stop charging first and make sure the charge port is unlocked.
 - Hold the charging connector with one hand and remove the connector by pressing its button (Configurations of the actual vehicle prevail).
 - Do not force the charging connector out while the charge port is locked, otherwise the charge port may be damaged.
- Switch the ignition off before charging.
- Precautions during charging:
 - The vehicle can be powered on to use the A/C normally while charging. To ensure the charging power, it is recommended to turn off the A/C.
 - It is recommended that no one stay in the vehicle during charging.
 - It is recommended to park the vehicle in a ventilated area during charging.
 - The vehicle system automatically stops charging when the high-voltage battery is fully charged. The charge port is equipped with an electronic lock. Unlock it before unplugging the charging equipment.
 - To stop AC or DC charging, turn off the charger before disconnecting the charging connector. In Mode 2 charging, remove the charging connector and then the power plug.

- When charging is complete and the connector removed, make sure the port cap is reinserted and port door closed.
- Before starting the vehicle, ensure that the charging equipment is disconnected. The locking mechanism can damage the charging equipment and the vehicle if the vehicle is started with the charging connector incorrectly inserted.
- Too high or too low battery temperatures compromise vehicle charging performance.
 - The temperature control system can improve the battery's charging capacity at low temperatures. Due to output capacity limitations of charging piles, the charging time is extended, the heating time becomes longer and the power consumption of heating is increased. This is a normal phenomenon.
 - For faster low-temperature DC charging, charging from low SOC is recommended because, due to the low battery temperature, the charging current is small for vehicles with high SOC in low-temperature environments.
 - To improve your experience, it is recommended to charge the vehicle immediately after using it, as the battery is relatively hot and has better charging performance.
 - When the temperature is low, it is recommended to charge the vehicle in a heated place indoors. If the charge port door is frozen due to weather or other reasons, do not force it open.
 - When the temperature is high, it is recommended to charge the vehicle in a cool, ventilated place.
- Turning A/C on during low-temperature charging affects the performance of the battery temperature control system and charging.
- It is normal that when the battery temperature control system is working during charging, the charging power displayed on the instrument cluster may fluctuate temporarily.
- Before charging is complete, battery equalisation is activated for longer battery life and thus the charging time may be longer.
- The use of A/C may worsen battery temperature control system performance in DC charging at high temperatures, resulting in lower charging performance and longer charging time. To ensure charging efficiency, it is recommended to keep the A/C off during charging.
- When the heating or cooling function is enabled during charging, it is normal that both charging time and power consumption increase slightly.
- During charging, battery cooling may start, and the compressor, fan and other components work when necessary. It is normal that there will be some noise under the bonnet.
- During charging, the estimated remaining time to full charge is displayed on the instrument cluster or infotainment touchscreen, and may vary slightly, depending on the temperatures, SOC, and charging facilities. Before charging is completed, "Calculating..." is displayed on the instrument cluster.
- If the charge port door is frozen due to weather or other reasons, it is suggested to warm up it with hot water and then open the port door. Do not force it open.

- If the vehicle is to be parked for a lengthy period of time, charge it every three months, and to prolong the service life of the high-voltage battery, charge fully before starting it again.

! REMINDER

- Do not force the charge port door open when it is locked.
- Do not close the charge port door when the port cap is fully open.
- When the vehicle is charged with an external power supply, it is normal that the cooling fan and A/C compressor may operate

! REMINDER

automatically for the high-voltage battery to cool down.

Charging Mode

1. Charging Reservation (Only AC): Charge the vehicle regularly at a scheduled charging time set by the user.

See reservation charging settings in this chapter for details.
2. Immediate charging: Charging starts after the charging connector is connected.

General Charging Troubleshooting

Fault	Possible Cause	Solution
Charger is connected and charge starts, but battery cannot be charged.	The high-voltage battery has been fully charged.	When the high-voltage battery is fully charged, the charging will stop automatically.
	High-voltage battery temperature is too high or too low.	Keep the vehicle in an environment with appropriate temperature and charge it when the temperature becomes normal.
	The low-voltage battery over-discharges.	Replace the low-voltage battery.
	Charging equipment fails.	If it is verified that the charging equipment's power indicator is working properly, or that there are no other unusual indications, change the charging equipment or contact the charging equipment supplier.
Charging stops midway.	Vehicle display fails.	Verify that there is a charging system fault message on the instrument cluster, then stop the charging. It is recommended to contact a BYD authorised dealer or service provider.
	The power grid goes down.	Charging will restart automatically after power is restored.
	Charging cable is not connected properly.	Verify that the charging connection cable is not loosely connected.

Fault	Possible Cause	Solution
	The charging connection switch* is pressed.	If the charging connection switch is pressed, the charging will stop. The charging connection should be connected again to start charging.
	High-voltage battery temperature is too high or too low.	The charging will automatically stop. Charge the vehicle when the battery temperature returns to a normal level.
	Vehicle or charging equipment fails.	If there is any fault prompt for the charging pile or the vehicle, it is recommended to contact a BYD authorised dealer or service provider.

Charging

- Check before charging:
 - Check the charging device for abnormalities such as cracked housing, worn cable, rusted plug, or foreign materials.
 - Do not charge when the charging connection becomes loose.
 - Make sure the port is clear of fluids or foreign objects, and its metal terminals are not rusty or corroded.
- In any of these cases, do not charge. Otherwise, personal injuries may occur due to short circuit or electric shock.
- Protect the charging equipment against water contact on rainy days.

Using Mode 2 Charging Cable

1. Equipment

- Connect the vehicle to an outlet that meets local standards to charge the vehicle.
- A household socket meeting local standards must be used in order to avoid line damage or tripping due to high-power charging, which may affect the normal use of other devices.

- This Mode 2 charging cable includes a power plug (complying with local standards), a charging connector, a control box, and a charging cable. The plug should be connected to a standard household power socket, and the charging connector to the vehicle's charge port.
- Charging time: Refer to the charging time message on the instrument cluster or infotainment touchscreen.

WARNING

- See Charging Instructions for charging safety warnings.
- The highest working temperature allowed for the charging equipment is 122°F (50°C). Store the product in a cool and dry place when it is not in use.
- When charging, do not place the equipment in the boot, under the front of the vehicle, or near the tyres.
- When using the equipment, prevent it from getting rolled over by the vehicle, dropped, or trampled on.
- It is strictly prohibited to modify, disassemble, or repair the charging equipment and

WARNING

its ports. If a fault occurs, it is recommended to contact a BYD authorised dealer or service provider.

- It is not recommended to use any additional wire or adapter/connector.
- Never use the charging equipment if the household power strip cable becomes soft, the charging connector cable is worn out, the insulation layer is cracked, or any other damage occurs.
- Never use the equipment when the charging connector, power plug, or power strip is disconnected or broken, or if there is any sign of surface damage.
- To prevent failure of the charge port door, do not open and close it repeatedly.

CAUTION

- The charging cable must not be placed in a spiral during charging, as this will affect heat dissipation.
- See “Charging Instructions” for specific charging precautions.

REMINDER


- It is recommended to contact a BYD authorised dealer or service provider or local electrician to select an appropriate power supply according to requirements of the charging equipment.
- Charging equipment grounding instructions: The equipment must be properly grounded. In the event of failure of or damage

REMINDER


to the equipment, the grounding cable provides a minimum impedance to circuit discharge, reducing the risk of electric shock. The equipment comes with a ground cable connecting its ground point with that of the power plug, which must match a properly installed and well-grounded power supply outlet.

2. Charging


- Switch the ignition off.
- With the doors unlocked, press the charge port door to open.

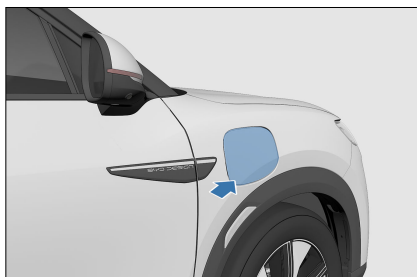


- Open the charge port cap, and make sure that no obstacles exist between the head of the charging connector and the end of the charging socket.

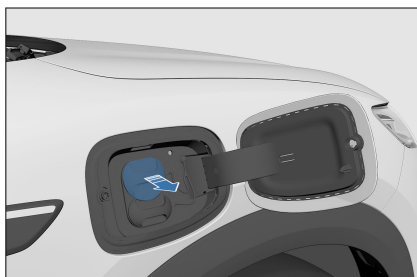

REMINDER

- Do not force the charge port door open when it is locked.
- Connect to the power supply terminal:
 - Plug the Mode 2 charging cable into a household socket.
- Connect to the vehicle port:
 - Plug the charging connector into the port and make sure it is tight.
 - After the charging connector is inserted, the charging connection indicator  on the instrument cluster or infotainment screen lights up.

CAUTION


- In the charging process, the instrument cluster displays relevant charging parameters and the charging sign.
- At this point, you can schedule charging on the infotainment touchscreen →  → **Energy** → **Charging/Discharging**. See "Scheduled Charging" for the configuration process.
- During charging, the estimated remaining time to full charge is displayed on the instrument cluster. It is normal that the remaining time to full charge may vary slightly depending on the temperatures, SOC, and charging facilities.
- Reservation charging cannot be used when the battery is too low.

3. Stopping charging

- End charging:

- The charging automatically ends when the vehicle is fully charged.
- To end the charging early, proceed to the next step.
- Unplug the charging connector:
 - If the immobiliser is deactivated on the infotainment touchscreen, press the mechanical button* of the charging connector and pull out the connector, or pull out the charging connector directly (Configurations of the actual vehicle prevail).
 - If the immobiliser is activated on the infotainment touchscreen, press the unlock button on the key or press the door handle microswitch with the key nearby, and then pull out the charging connector.


REMINDER

- To unlock the vehicle, press the unlock button on the key (when charging the vehicle with ignition switched off) or press the microswitch on the door handle (when the key is nearby).
- When the immobiliser is enabled, unlock the vehicle to release the immobiliser of the charge port before pulling out the charging connector. The connector has to be pulled out within 30 seconds, or the port will re-lock.
- You can set the immobiliser system on the infotainment touchscreen →  → **Energy** → **Charging and Discharging**, as detailed in "Charging Port Immobiliser System" in this chapter.
- If the charging connector cannot be removed after unlocking, try a few more unlocking

! REMINDER

attempts. If that does not work, try emergency unlocking. For the operating procedure, see "Emergency Unlocking of the Charge Port" in "Charging Port Immobiliser System".

- If you cannot pull the charging connector out directly when the charge port's immobiliser system is deactivated, try to unlock the vehicle and pull it again.
- Disconnect the power plug.
- Close the charge port cap and the port door.
- Store the charging equipment properly.

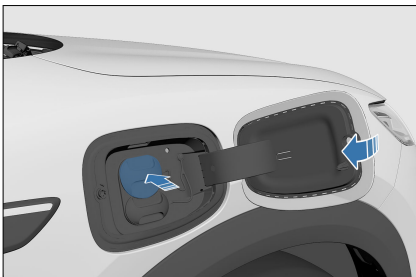

! REMINDER

- Do not close the charge port door when the port cap is fully open.

Using AC Charging Piles*

1. Equipment

- Single-phase AC charging box*
 - Use a standard-compliant household charging box. For how to use the charging equipment, refer to its user manual and follow the operating steps.

- The single-phase AC charging box consists of a charging box, a charging connector, and a connecting cable. For information on circuit breaker and emergency stop switch, see the charging box user manual.
- Single-phase AC charging pile
 - Charge the vehicle using a single-phase AC charging pile in a public place. Since some charging piles are not equipped with charging connectors, AC charging connectors need to be prepared.
- AC charging connector*:
 - Mode 3 charging cable includes a power plug (complying with local standards), a charging connector, a plug/connector protective cover, and a charging cable. The plug is connected to the power outlet, and the charging connector to the vehicle's charge port.

! WARNING

- See section "Charging Instructions" for charging safety warnings.

! CAUTION

- The charging cable has a limited reach. Do not excessively stretch the cable.
- If you need to stop charging before the battery is fully charged, try to use early stop set for the charger first instead of directly unplugging the charger.

! CAUTION

- When using an AC charging connector, pay attention to the identification of power plug and




CAUTION

charging connector in order to avoid reverse connection.

2. Charging

Use Mode 3 charging cable to connect your vehicle to the AC charging pile if no charging connector is provided, or connect the vehicle to the AC charge pile/box by the charging connector of this pile/box to begin charging.

- Unlock the charge port door, then open the port door and cap :
 - Open the charge port door and the protection cover as per the instructions in Using Mode 2 Charging Cable.
- Connect to the power supply terminal:
 - Skip this step for AC charging boxes.
 - Skip this step for AC charging piles equipped with charging connectors.
 - Use the AC charging connector to connect your vehicle to the single-phase AC charging pile with no charging connector.
- Connect to the vehicle port:
 - Plug the charging connector into the port and make sure it is tight.
- Charging settings:
 - Skip this step if an single-phase AC charging box or a public AC charging pile without any setting option is used.
 - For public single-phase AC charging pile/box with settings, swipe the card or scan the QR code. See the user manual for charging pile/box details.
- The charging connection indicator  lights up on the instrument cluster.

- In the charging process, the instrument cluster displays relevant charging parameters and the charging sign.
- At this time, you can schedule smart charging on the infotainment system.

3. Stopping charging

- End charging:
 - Charging ends automatically when early stop time is due or charging is complete.
 - Press the unlock button on the smart key or press the door handle microswitch (while carrying the smart key), then the vehicle will stop charging.
- Unplug the charging connector:
 - Disconnect as per the instructions in Using Mode 2 Charging Cable.
- Disconnect the power plug.
 - If Mode 3 charging cable is used, it is recommended to unplug the charging connector from the vehicle first and then the plug from the charging point.
 - Skip this step for AC charging boxes.
 - Skip this step for AC charging piles equipped with charging connectors.
- Close the AC charge port door (see instructions for Mode 2 charging).
- Store the equipment properly.
 - If an AC charging pile/box is used, place the charging connector in its designated location.
 - Store the equipment properly.

Using DC Charging Piles

1. Equipment

- Use the DC battery charger in public places to charge the vehicle. Generally,


it is installed in a specific charging station.


- Equipment specifications: Check the instructions of the charging piles.
- Charging time: Refer to the charging time message on the instrument cluster or infotainment touchscreen.

2. Charging

DC charging is achieved by connecting the vehicle to a DC charger via its connector.

- Unlock the charge port door, then open the port door and cap.
- Connect to the vehicle port:
 - Plug the connector into the port, making sure it is tight.
- Operate the charging equipment according to the instructions to start charging.

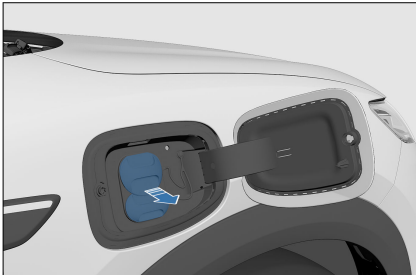

- The charging connection indicator  lights up on the instrument cluster.
- In the charging process, the instrument cluster or infotainment touchscreen displays relevant charging parameters and the charging sign.

3. Stopping charging

- End charging:
 - Charging ends automatically when early stop time is due or the charging is complete.

- Unplug the charging connector:
 - Press the mechanical lock button* of the DC charging connector to pull out the connector.
- When the DC charging pile charging is complete, organise the charging equipment and store the charging connector in its designated position properly.
- Close the charge port cap and the port door.

WARNING

- See section "Charging Instructions" for charging safety warnings.

CAUTION




- If the charging connector cannot be removed after unlocking, try a few more unlocking attempts. If that does not work, try emergency unlocking. For the operating procedure, see "Emergency Unlocking of the Charge Port" in "Charging Port Immobiliser System". After charging, if the charging connector cannot be pulled out, please contact our customer service immediately.
- To unlock the charge port after DC charging, press the unlock button twice within three seconds.
- See "Charging Instructions" for specific charging precautions.

REMINDER

- Do not close the charge port door when the port cap is fully open.


Scheduled charging

The charging mode can be set on the infotainment system. To access or exit the setting:

- Go to the infotainment touchscreen →  → **Energy** → **Charging/Discharging** → **Smart Charging**.
- To exit the Scheduled Charging screen, tap  or .

Setting screen

- ① Reservation Charging Switches
- ② Charging start and end time
- ③ Repeat cycle
- ④ Settings

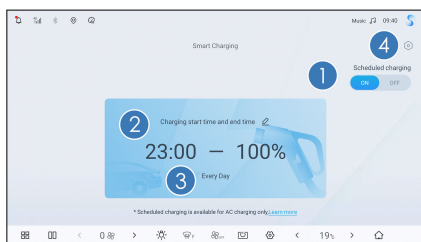

- The factory default setting is to charge the vehicle immediately. That is, scheduled charging is disabled.
- To schedule a charging, toggle the reservation charging ON ①, set the charging start time ② and repeat cycle ③, then save the settings.
- After the reservation is set up successfully, if you connect the charging connector or press the power button to power off the vehicle during the charge waiting period, you will be reminded through the infotainment touchscreen that reservation charging has been set. Switch to instant charging if needed.
- You can tap the reservation charging setting icon ④ to turn off the charging

connector connected alert and power-off alert in the Reservation Charging Alert.

CAUTION

- The scheduled charging function is developed for BYD's slow AC charging equipment only. Disable this function when using non-BYD-certified slow AC charging equipment. Otherwise, scheduled or immediate charging may fail due to no response from the equipment, resulting in low SOC or even low voltage of the high-voltage battery.

REMINDER

- You can tap “charge now” on the infotainment touchscreen to charge immediately, but this setting is valid for the current session only. To cancel all scheduled charging sessions, toggle ① off on the setting screen.
- The reservation charging function is only dedicated for AC charging piles provided by BYD. If you need to use this function via a public charging facility, please make sure that the facility supports vehicle-terminal reservation.
- In the event of low battery, the vehicle is charged to the minimum level before scheduled charging begins. In this process, the infotainment system still gives reminder messages for power-off and charging connector connection, and a related message is displayed on the instrument cluster.
- The vehicle's power consumption will increase while waiting for the reservation charging. It is normal

REMINDER

for long waiting to result in a reduction of the vehicle's power and driving range.

- The schedule setting is invalid for DC charging. Charging begins immediately after a DC charging connector* is connected.

Intelligent Charging

- If the high-voltage battery has sufficient power, it will charge the low-voltage battery when the latter is detected to be low.

REMINDER

- When the vehicle is stored for a long time, the smart charging function may be activated automatically. It is normal that smart charging takes place.
- Power for smart charging comes from the high-voltage battery pack, so it is normal that an SOC decrease is noticed when the vehicle is powered on.

Discharging Device

- This vehicle features a vehicle-to-load (V2L) function.

WARNING

- Do not touch any metal terminal of the discharging socket, in-vehicle discharge socket, or vehicle charge port during discharging.
- Stop discharging immediately if there are any abnormalities such as peculiar smell and smoke.

WARNING

- See Charging Instructions for discharging safety warnings.
- Store the product in a cool and dry place when it is not in use.
- When discharging, do not place the equipment in the boot, under the front of the vehicle, or near the tyres to prevent it from falling and being rolled over by the vehicle and trampled on.
- Never use the equipment if the power strip cable becomes soft, the discharging connector cable is worn out, the insulation layer is cracked, or any other damage occurs.
- Never use the equipment when the discharging connector or power strip is disconnected or broken, or when there is any sign of surface damage.

CAUTION

- For precautions concerning use of the discharge connection device, please refer to the precautions for charging equipment included in item 3 of Charging Precautions.
- Before discharging, confirm the vehicle SOC and estimate the remaining driving range.
- Before V2L discharging, ensure that the load is turned off.

REMINDER

- The V2L function is recommended only when the vehicle SOC is high.
- The V2L function is restricted when the vehicle SOC is low.

REMINDER

- To ensure the driving range, the discharging power is limited at low temperature.
- When the vehicle is powered off, the static power consumption of the vehicle will increase if the V2L connection device is connected for an extended period without any output. Therefore, removing the discharging/charging connector is recommended when the device is not used.

Discharging

Starting discharging


- Before discharging, unlock the vehicle (disarm the anti-theft alarm system).
- Unlock the charge port door, and then open the port door and cap.
 - Open the charge port door and the protection cover as per the instructions in Using Mode 2 Charging Cable.
- Check before discharging:
 - Ensure that the vehicle SOC is at least 15%.
 - Ensure the V2L connection device casing is not cracked, and its plug is free from rust or obstructions.
 - Ensure that there is no water or foreign material inside the charge port and that metal terminals are not damaged and free from rust or corrosion.
 - In any of these cases, do not charge. Otherwise, personal injuries may occur due to short circuit or electric shock.


- Connect the discharge connection device:
 - Connect the V2L discharge device to the charge port and the external electrical plug to the discharging socket (the external plug shall be connected properly to ensure the contact between the plug end surface and the socket end surface). At this time, the socket indicator becomes solid red, indicating that the socket can be used.
- Start discharging:
 - After the device is connected, discharge begins and discharging information is displayed on the instrument cluster.

3. Stopping discharging

- End discharging:
 - Disconnect the load.
- Disconnect the discharge connection device:
 - Unplug the discharging device.
 - Close the charge port cap and the port door (see instructions for Mode 2 charging).
- Organise the equipment:
 - Store the equipment properly when discharging is complete.

Charging Port Immobiliser System

- In order to prevent the charging connector from being stolen, the vehicle charge port is anti-theft with the charging port immobiliser system. The charging port immobiliser system is disabled by default. To enable it, go to the infotainment touchscreen →  → **Energy** → **Charging/Discharging**.

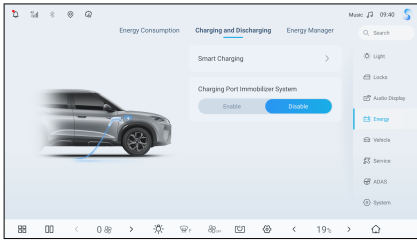

- When the immobiliser is enabled, unlock the vehicle and unplug the charging connector during charging in the following ways:
 - With the ignition off, press the unlock button on the smart key to unlock.
 - Press the microswitch next to the exterior handle of the driver's door to unlock (with the smart key nearby).
 - Press the central unlock button on the driver's door to unlock.


CAUTION

- After unlocking the charging connector, it can be pulled out within 30 seconds. After 30 seconds, it will lock again.
- After the vehicle is fully charged, the charging connector will be automatically unlocked when the immobiliser mode of the charge port is disabled. When this mode is enabled, the charging connector must be manually unlocked following the above steps.

Emergency Unlocking of Charge Port

- When the charging connector cannot be unplugged due to failure of the immobiliser system, unlock the charge port manually and unplug the charging connector.


- Open the bonnet. A lock latch can be found inside. Pull the latch to unlock the charging connector.
- Reset the emergency cable latch after unlocking.

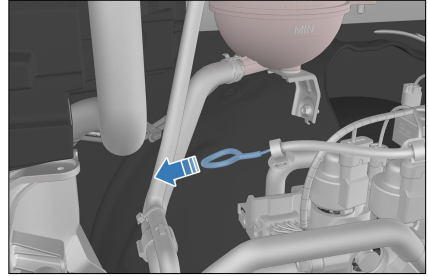

CAUTION

- In the event of abnormality or function failure, contact a BYD authorised dealer or service provider.

Driving Range Display*

- The range display mode can be set to improve driving experience. The default setting is standard mode.
- The corresponding settings are accessible on the infotainment touchscreen →  → **Audio Display** → **Instrument**.
 - Standard mode: displays the driving range based on the result of comprehensive working condition test.
 - Dynamic mode: displays the estimated driving range based on the available battery power and current average energy consumption.
- The set driving range display mode is memorised by the system.


- When the vehicle is powered off and then on, the display mode set last time will be maintained.

REMINDER

- When the dynamic driving range display mode is set:
 - The driving range that is displayed after a full charge may vary, depending on calculations of the energy consumed the last time the vehicle is used.
 - The driving range actually displayed will be adjusted based on the state of the vehicle's air conditioner, the driving mode (ECO, NORMAL, SPORT, etc.) selected, and the driver's driving habits, so as to match the vehicle's actual driving range.

Regenerative Braking Intensity Settings

- During the driving, energy is recovered through regenerative brakes when the vehicle decelerates. For higher efficiency, do not accelerate or decelerate the vehicle unnecessarily.
- The energy regeneration intensity can be set with the regenerative mode button or on the infotainment touchscreen.
 - Standard: When the accelerator pedal is released, the motor controller recovers energy in the standard level, and the vehicle deceleration is in the standard level.
 - High: When the accelerator pedal is released, the motor controller recovers more energy, and the vehicle deceleration is high.

- The corresponding settings can be made on the infotainment touchscreen
→  → **Energy** → **Energy Manager**.

- You can select the regeneration intensity based on the deceleration sense when releasing the accelerator pedal. Different deceleration senses deliver different driving experiences.
- The set energy regeneration intensity will be memorised. When the vehicle is powered off and then on, the regenerative braking mode set last time will be maintained.

REMINDER

- Setting regeneration intensity at high vehicle speeds should be avoided, as it may be a distraction and could result in accidents.
- The power of the whole vehicle is weaker at low battery level than that at high battery level.

Batteries

High-Voltage Battery

- The vehicle is powered by a high-voltage battery that can be charged and discharged repeatedly. The high-voltage battery is charged by an external power source or through energy recovery when the vehicle brakes or coasts.

CAUTION

- The high-voltage battery is arranged at the bottom of the vehicle, so be careful to avoid bumping when driving on bumpy or uneven roads. If bumping occurs, go to a BYD authorised



CAUTION

dealer or service provider for maintenance.



REMINDER

- Due to the chemical characteristics of the battery itself, the battery capacity of vehicles that have been used for a period of time has natural degradation, and their mileage will reduce. When you find that the mileage of your vehicle has decreased, it is recommended to go to a BYD authorised dealer or service provider for check. The store-side inspection can confirm whether the reduction of mileage is normal.

Battery Properties

- It is normal that vehicle performance is affected by battery electrochemical properties and self-protection and varies to some extent in the following conditions:
 - When SOC is high, the regenerative braking performance may decline.
 - The vehicle switches to trickle charging mode at high SOC. If the charging time is prolonged, the estimated remaining charging time displayed on the instrument cluster may not be accurate.
 - When SOC is low, the acceleration performance may decline.
 - When the high-voltage battery is low, V2L is unavailable. Charge the battery promptly.
 - At high or low temperatures, it is normal that the charging and discharging capabilities of the high-voltage battery decline, and the charging time is prolonged. For fast charging, high-power charging equipment is recommended. Power performance may also decline under extreme temperatures.
- When charging in low temperatures, the temperature control system can significantly improve charging capability. See Charging Precautions for details.
- When the vehicle is used at low temperatures, the battery's temperature control system will start heating the battery as appropriate to ensure the driving power and discharging performance and improve your driving experience. When the vehicle is driven over short distances, heating may be ineffective, which increases power consumption and decreases driving range.
- When the high-voltage battery is normal, the driving range of the vehicle varies with the following factors:
 - Driving habit: For example, the range in frequent acceleration or deceleration is shorter than that at constant speeds, and the range is shorter when driving at high speeds than when at low speeds.
 - Road conditions: For example, the range driven in rough conditions or on long slopes is shorter than that in normal conditions and on even roads.
 - Temperature: The driving range at low temperatures is shorter than that at ambient temperatures.
 - Use of electric equipment: For example, the range driven with A/C on is shorter than that with A/C off.
 - Usable capacity of the high-voltage battery is lower in cold weather and reduces as the temperature

decreases. If the vehicle with high battery level is charged at low temperatures, the SOC may quickly jump to 100%.

- The available battery capacity decreases as the vehicle is used over time.

Battery Usage Tips

- It is recommended to use the vehicle at temperatures between 14°F (-10°C) to 104°F (40°C). When SOC is low, timely charge the vehicle to ensure enough driving range and good acceleration performance.
- To ensure long term performance, avoid driving in extreme temperatures for over 24 hours.
- In low ambient temperatures, if the vehicle must be stored for a long time, it can be placed in an underground garage or other warmer area to reduce loss of battery heat, maintaining vehicle performance.
- Frequent and sudden acceleration or deceleration should be avoided. Preferably drive the vehicle on flat and dry roads. When necessary, turn off high-power equipment such as A/C or adjust the A/C temperature to reduce power consumption of such devices and increase the driving range.
- When the vehicle is used for the first time or after a long idle period, the SOC displayed on the instrument cluster may not be correct. It is recommended to fully charge the vehicle first.
- For optimal battery performance, it is recommended to fully charge the vehicle at a regular basis (at least once a week), and fully charge it from low battery (SOC <10%) once every three to six months.

- Under extreme working conditions (such as frequent sudden acceleration/ deceleration) that cause battery overheating, if the temperature of high-voltage battery is excessively high, it is normal for discharging capability to decrease gradually. If the battery temperature keeps rising, the fault warning light lights up on the instrument cluster. In that case, it is recommended to contact a BYD authorised dealer or service provider.
- When the battery SOC increases or decreases abnormally, it is recommended to contact a BYD authorised dealer or service provider for inspection.

WARNING

In the event of an emergency or accident, be aware of the following warnings:

- To avoid personal injuries, do not touch the high-voltage battery directly.
- Contact a BYD authorised dealer or service provider as soon as possible.
- If the high-voltage battery is damaged and leaking fluid, avoid any contact with the fluid. If it comes into contact with skin or eyes, rinse immediately with plenty of water, and seek immediate medical attention.
- If the vehicle catches fire, use dedicated fire extinguishers instead of water-based fire extinguishers.

CAUTION

- To ensure safety of the high-voltage battery, stop the vehicle away from flammable and

**CAUTION**

explosive materials, ignition sources and various hazardous chemicals.

- Prolonged exposure to heat sources and direct sunlight reduce the service life of the high-voltage battery.
- Do not add battery coolant by users themselves. If needed, contact a BYD authorised dealer or service provider.
- No one is allowed to enter the vehicle when the battery pack needs to be repaired.

Recycling the High-Voltage Battery

How to scrap an NEV:

1. Take the vehicle to the BYD recycling service provider that will assess the residual value of the high-voltage battery.
2. Take the assessed vehicle to the recycling organisation to disassemble the high-voltage battery.
3. Take the battery to the recycling service provider which will buy back the battery.

**WARNING**

- New energy car owners have the responsibility and obligation to hand over waste high-voltage batteries to the recycling service outlet. Anyone who hands over a used high-voltage battery to any other organisation or individual, or removes/disassembles a high-voltage battery without authorisation, shall be liable for

**WARNING**

any environmental pollution or safety incident so caused.

Low-Voltage Battery

The low-voltage battery (12V battery) is located under the rear seat. The 2 poles of the low-voltage battery are positive terminal ("+") and negative terminal ("-").

- To prevent the SOC of the low-voltage battery becoming too low, the intelligent charging function is triggered automatically when conditions are met (ignition off, high-voltage battery discharging allowed, and low-voltage battery level below the design value).
- If the battery voltage is too low, it may not be able to power on the vehicle. In that case, contact the BYD authorised dealer or service provider promptly.
- Check the conditions of the low-voltage battery once a month, including corrosion of its poles. If the poles are corroded, disconnect the negative terminal and pour soda water on it. When the bubbles dissipate, rinse the brown water and wipe them with a dry cloth. Apply some grease to prevent further corrosion.
- If the connector becomes loose, tighten the clamp nut, but do not overtighten it. Tighten the pressing tool until it securely fixes the low-voltage battery in place. Overtightening will damage the battery box.

**REMINDER**

- It is normal that intelligent charging with the ignition off

REMINDER

produces a noise similar to when the ignition is switched on.

- Do not carry out maintenance work during intelligent charging.
- When leaving the vehicle, make sure the doors are closed and all electrical equipment is turned off.
- If the vehicle needs to be parked for a long time, please disconnect the negative terminal wire.

CAUTION

- When checking the low-voltage battery, remove the ground cable from the negative terminal (-) first, and reconnect it last.
- When cleaning the low-voltage battery, make sure to avoid any fluid getting inside.

WARNING

- The low-voltage battery contains a corrosive solution. To prevent damage to the battery or injury, do not disassemble or repair the battery without authorisation.
- Do not disassemble or dismantle the low-voltage battery. Any organisation or individual to do so shall bear the responsibility for environmental pollution or accidents.
- Since the low-voltage battery may produce combustible and explosive hydrogen gas, use tools in such a manner that the battery would not produce sparks. Do not smoke or use open flames near the battery.

WARNING

- Avoid electrolyte contact with eyes, skin or clothing. In case that happens, use baking soda water to clean the skin, and plenty of water to rinse the eyes, and immediately seek medical attention.
- In case of mouth contact with the electrolyte, seek medical attention immediately.
- Keep children away from the low-voltage battery.

Waking up the Vehicle from Low SOC


Wake-up by the driver's door microswitch:

- The low-voltage battery features the dormant/wake-up function. The low-voltage battery may have entered a dormant state after long-term parking. In that case, the vehicle cannot be located or unlocked with the smart key. To wake up the vehicle, hold the smart key close to the driver's door and then press and hold the microswitch on the door. When unlocked, the vehicle can be used as normal. If these actions cannot wake up the vehicle, the low-voltage battery may have been exhausted.


Wake-up by jump starting*:

If the vehicle cannot be waked up by using the microswitch, use a 12V power supply and two specially designed cables to jump start the vehicle.

- Positive terminal for jump starting: inside the under-bonnet power distribution box (PDB)

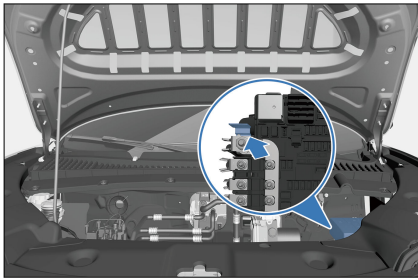

- Negative terminal for jump starting: Unpainted metal on the front motor assembly, such as the bolt shown in the illustration.

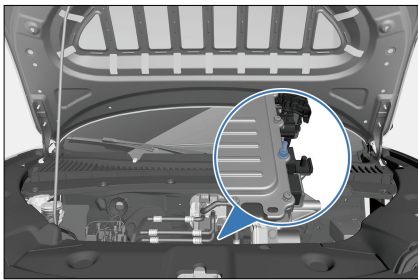

WARNING

- Never jump start another vehicle. This may damage the low-voltage battery.
- If the low-voltage battery SOC is too low or the battery fails, jump starting may be required. Please carefully read and strictly follow the jump starting instructions in this manual.
- The low-voltage battery contains an intelligent control module. To prevent battery damage, do not disassemble this battery without permission, except in an emergency.
- Disconnect the negative terminal of the low-voltage battery before

WARNING

- performing parts replacement and vehicle repairs.
- Do not clean the low-voltage battery with water, but wipe it with a cloth instead.

CAUTION

- It is recommended that the jump starting be done under the guidance of professionals, as the space for operating the under-bonnet PDB is limited and circuit-based risks are present.

Usage Precautions

Break-in Period

- If the powertrain is hard to start or frequently stops turning, inspect the vehicle immediately.
- If the powertrain makes any abnormal sounds, stop the vehicle for inspection.
- If the powertrain has severe coolant and oil leakage, stop the vehicle for inspection.
- The powertrain needs break-in. This should preferably be done within the first 1,243 miles (2,000 km) in economic mode. Steady driving instead of high-speed driving is recommended. The following practices effectively prolong vehicle service life:
 - Avoid flooring the accelerator pedal when starting and driving the vehicle.
 - Avoid speeding.
 - Do not maintain a high or low speed for too long.

- Avoid emergency braking within the first 300 km.

Trailer Towing*

- The vehicle can tow a trailer only when equipped with towing function.
- Do not use the vehicle to tow other vehicles within the first 1,243 miles (2,000 km) of mileage.


The towing capacity depends on various factors such as vehicle specifications, loads, road conditions, and trailer specifications. The total towing weight must not exceed the limits below:

Item	Parameter	Note
Maximum towing capacity	1653 lb (750 kg)	Maximum total towing capacity allowed
Maximum vertical load	165 lb (75 kg)	Maximum vertical load allowed on ball joint

- To tow a trailer, adjust the tyre pressure to accommodate additional loads. Keep front tyres inflated to 2.7 bar (270 kPa) and rear tyres to 2.7 bar (270 kPa).
- Observe applicable local laws and regulations regarding towing. For driving safety, avoid speeding and overloading.
- For towing, the technically permissible maximum mass on the rear axle may be exceeded by no more than 15% and the technically permissible laden mass of the vehicle may be exceeded by no more than 220 lb (100 kg). In these instances, the vehicle speed must not exceed 62 mph (100 km/h) and the rear tyre pressure must be at least 0.2 bar (20 kPa) above the tyre pressure recommended for normal use.
- Towing other vehicles will have an adverse impact on the vehicle, including maneuverability, performance, braking, endurance,

- Do not make non-approved modifications. Contact a BYD authorised dealer or service provider to install the towing kit and related software updates. BYD does not assume any responsibility for injuries or damage caused by non-approved modifications.

- economic driving or power consumption.
- BYD does not assume any responsibility for damage or injuries resulting from towing a trailer due to failure to comply with the proper guidelines. Damage caused by towing a trailer is not covered by the warranty.
- For detailed towing instructions, contact a BYD authorised dealer or service provider.

 **WARNING**

- The tow bar is for towing trailers only. Do not use it to get unstuck or tow trapped vehicles to prevent vehicle damage and even personal injuries.

Driving Safety Precautions

No Drunk Driving

Even a small amount of alcohol can reduce a driver's ability to respond to traffic condition changes. The higher the level of alcohol, the less responsive the driver will be. Therefore, never drive while under the influence.

No Speeding

Speeding is a major cause of fatal accidents. Faster speeds generally entail higher risk. Therefore, maintain a speed safe for the road traffic conditions.

Keeping the Vehicle Safe for Driving

Tyre bursts and mechanical faults are extremely dangerous. To reduce the possibility of such faults, frequently check the vehicle's condition, and regularly complete the specified inspections.



CAUTION

- Any driver must possess a driver's license before driving a vehicle.
- Do not drive when fatigued.
- Always follow the traffic regulations when driving a vehicle.
- During driving, please focus on driving, and avoid activity unrelated to driving (such as making / receiving phone calls and adjusting buttons).

Vehicle Use Suggestions

Suggestions for prolong the battery usage:

- When the vehicle is not to be operated for an extended period (over seven days), it is recommended that the battery SOC should be kept at 40%-60%, or it will reduce high-voltage battery service life.
- When the vehicle is not to be operated for over three months, the high-voltage battery must be fully charged and then discharged to 40%-60%. Otherwise, over-discharge may lead to battery performance degradation or even damage. Any vehicle fault or damage so caused will not be warranted.
- During operation of the vehicle, if the instrument cluster displays the driving mileage as 0, it indicates the battery SOC is low. In this case, charge the high-voltage battery in time and avoid operating the vehicle with low SOC for a long time.
- For optimal battery performance, use a charging connector to fully charge the battery regularly, and the recommended frequency is once a week at least.
- To maintain long-term performance, avoid continuously exposing the vehicle to an environment with a temperature above 60°C or below -30°C for over 24 hours.
- If the tray dented inward or there is scarification under the battery package tray, it is suggested to check at a BYD authorised dealer or service provider.
- During operation of the vehicle, avoid repeated rapid acceleration or deceleration whenever possible.
- During operation of the vehicle, avoid operating the vehicle continuously for a long time whenever possible; otherwise, the excessively high battery temperature will affect vehicle performance.

- If the instrument cluster malfunctions when driving, it is recommended to contact a BYD authorised dealer or service provider for inspection as soon as possible.
- When the high-voltage battery temperature is high, the vehicle performance will be limited to some extent. In this case, stop the vehicle and wait until the temperature drops before operating.

REMINDER

- If the meter drops to 0, the battery must be recharged. If it is not recharged within 7 days, the battery may suffer permanent damage. Such damage is not covered by BYD warranty terms.
- Driving range depends on many factors, such as the vehicle's available power, vehicle age (current battery life), weather, temperature, road conditions and driving habits. Compared with under normal temperatures, the driving range is somewhat reduced and power performance will also be affected in low or high temperature environments.

Saving Energy and Extending Vehicle Service Life

- Saving energy is simple and easy, and it helps prolong the vehicle's service life.
- Energy and repair cost saving tips:

1. Regenerative braking setting:

- The vehicle is provided with an energy regeneration function. To set the energy regeneration intensity, operate the regenerative braking mode button

or go to the infotainment touchscreen. In high energy recovery mode, more energy is recovered during vehicle braking and coasting. Please set to suit to your driving habits.

2. Maintaining constant speed:

- Constant speeds save energy. Sudden acceleration, sharp turns and emergency braking increase consumption.
- Speeds should be kept constant according to traffic conditions. Additional energy is consumed each time the accelerator is pushed.
- Acceleration should be gradual. Avoid sudden startup, acceleration, or deceleration.
- Prevent emergency braking and subsequent brake wear by keeping an appropriate distance from vehicles ahead, and paying attention to traffic lights.
- Congested roads increase energy consumption.
- Keep moderate speeds in motorways. The higher the speed, the higher the consumption. Maintaining vehicle speed within the economical speed range can save power.

3. Reducing load:

- Consumption is higher when air conditioning is used. Turn off the A/C to reduce power consumption. When outside temperatures are moderate, use fresh air mode.
- Do not overload the vehicle unnecessarily. Excessive weights add the load of vehicle, increasing energy consumption.

4. Other tips:

- Make sure tyre pressure is correct. Low tyre pressure increases energy consumption and wear.

- Keep front wheels properly aligned, avoid driving into curbstones, and drive slowly in rough terrain. Misalignment of the front wheels not only increases tyre wear, but also increases load on the powertrain and power consumption.
- Keep the bottom of the vehicle clean and mud free. This reduces vehicle weight and prevents corrosion.

REMINDER

- Do not coast in neutral gear.

Carrying Luggage

- This vehicle has multiple storage spaces that allow you to conveniently keep items. Overloading or improper accommodation may affect maneuverability, stability and normal operation of the vehicle, and reduce its safety.
- The glove box, storage boxes on interior trim panels and seatback pockets are designed for small and light objects, while the boot for large and heavy objects.
- Long items can be loaded by folding the rear seat backrests. Overloading or improper accommodation may affect maneuverability, stability and normal operation of the vehicle, and reduce its safety.
- Make sure the vehicle's total load (vehicle + passengers + luggage) remains within the specified maximum weight.

WARNING

- Overloading and improper accommodation may affect stability and vehicle control, which may lead to accidents.

WARNING

- Observe the maximum weight limit and other loading guidelines in this manual.
- Do not carry highly magnetic items, as they might interfere in the vehicle's operating functions.

Carrying Luggage in the Passenger Area

- All items that could be thrown inwards and thus injure occupants in case of a collision must be properly placed and secured.
- Do not place any objects on the inner side of rear windscreen. Otherwise, these objects will block the driver's line of sight and will be thrown here and there inside the vehicle in case of collision.
- Ensure that items placed on the floor behind the front seat do not roll under the seat, so as to avoid affecting the driver's ability to control the pedals or normal seat adjustment. Do not stack items to a height taller than the front seatbacks.
- Make sure the glove box is always closed while driving. If the glove box is open, the occupant's knees may be injured in case of a collision or an emergency stop.

REMINDER

- Do not pile up toys in the vehicle, as this may affect driving safety and present a hazard to the children, especially in case of emergency braking or collision.

Loading the Boot

- Place luggage evenly in the boot. Put heavier items at the bottom and as far in as possible.
- Secure items with ropes or straps so that they will not move while driving. Do not stack items to a height taller than seatbacks.
- For boot strapping or fastening supplies, contact a BYD authorised dealer or service provider.

Roof Rack*

- Storing luggage on the roof rack will increase overall energy consumption and change the way the vehicle drives and handles.
- When installing the roof rack, please read and follow the manufacturer's instructions.
- Try to load the roof beam evenly and keep the centre of gravity low. Loads on the roof rack may elevate the overall centre of gravity, which might alter your driving experience.
- When driving a heavily loaded vehicle, take extra precautions, drive slowly, and increase your following distance.
- The maximum recommended load evenly distributed over the beam is: 110 lb (50 kg).

CAUTION

- Luggage must not be put on the roof metal sheet directly. The roof metal sheet is not designed for loading.
- Use the roof rack properly and fasten the luggage on the beam.

CAUTION

- Make sure the luggage is securely fastened on the roof rack before driving and during parking.

Wading into Water

- Before driving into flooded areas, check the water depth and make sure it does not exceed the vehicle's lower edge.
- If crossing a flooded area is necessary, turn off the air conditioner and keep acceleration steady to slowly cross over.



- Never stop, back up, or turn off the vehicle in flooded areas.
- Be careful when driving through deep water, as brakes may get wet.
- After crossing over, press the brake pedal several times to dry out the disks and recover brake performance.
- Do not wade into water unless necessary.

WARNING

- Drive carefully to avoid accidents when there is any water or slurry in the braking system, as this may increase the brake response

WARNING

time, thus extending the braking distance.

- Carefully apply any wet brake, and remove ice or water on it.
- Avoid emergency braking as far as possible after driving through any waterlogged road section.
- If the vehicle drives on the waterlogged road. prevent water from entering the motor, otherwise the motor will be damaged seriously. Such damaged is not covered by the vehicle's warranty
- After the vehicle drives through waterlogged road sections, vehicle components, such as drive system, driving system and automotive electric system may also be damaged seriously. Such damage is not covered by the vehicle's warranty either.
- Be sure to find a sheltered place when charging the vehicle on rainy days. If the vehicle is immersed in water or wades through water over the doorsill, which may cause water ingress in high-voltage components, promptly contact a BYD authorised dealer or service provider for testing and troubleshooting.
- Do not drive the vehicle on the road where the depth of accumulated water exceeds half of the tyres.

Influence of water ingress in high-voltage components:

- Water getting into high-voltage components, which are electronic

devices, may not be fully dried out by any means.

- Water ingress seriously compromises insulation of high-voltage components, and conductive substances in water may lead to short circuit of high-voltage components or such risk in the entire high-voltage system. This significantly affects the safety and service performance of the vehicle.
- The reduced ingress protection rating and voltage withstanding performance due to water in high-voltage components pose a high safety risk.

Fire Prevention

To prevent vehicle fires in a timely and effective manner, pay attention to the following during use of the vehicle:

- No flammable or explosive items are allowed in the vehicle.
 - Temperatures may reach 140–158°F (60–70°C) in a vehicle exposed to direct sunlight in summer. Therefore, flammable and explosive items, such as lighters, cleaning agents and perfumes stored in the vehicle can cause a fire or even explosion easily.
- Make sure cigarettes are thoroughly put out.
 - Smoking is harmful to your health and may cause a fire. Cigarettes that not thoroughly put out may cause a fire.
- It is recommended to go to a BYD authorised dealer or service provider for regular vehicle checks.
 - Check vehicle wiring, connections, wiring harnesses, insulation, and fixed position regularly. Deal with identified problems promptly.

- Do not refit vehicle wiring or add any unauthorised electrical appliance.
 - The addition of extra electrical appliances, such as high-power audio systems, lights, etc., may overload the vehicle wiring, overheat the wiring harness and increase the risk of fire.
 - Improper refitting of electrical appliances or wiring may cause a fire due to contact resistance and abnormal heating. Other replacement wires or fuses in excess of relevant electrical rating are strictly prohibited.
- Select a proper parking location.
 - When parking the vehicle, try to avoid sun exposure.
- Keep a lightweight fire extinguisher in the vehicle and know how to use it.
 - To ensure vehicle safety, a fire extinguisher should be equipped in the vehicle, and be checked and replaced regularly. Also, you should familiarise yourself with use of the fire extinguisher in case of an accident.
- Disconnect the negative cable of the low-voltage battery when the vehicle is being serviced or repaired.
- In the event of a fire in the vehicle, take effective measures in a timely and calm manner to minimise any losses:
 - Fires typically show initial warning signs, such as abnormal noises and odours in the vehicle body. When abnormal conditions are found, turn off and stop the vehicle immediately. It is best to park the vehicle in a windproof place, and then put out the fire using the fire extinguisher in the vehicle.
 - Call the fire alarm in time, and also dial the insurance company's

reporting number and ask the company to come to the fire site for handling.

- Look for the ignition point. If the engine compartment smokes, do not open the bonnet immediately. (This will let a large amount of air in and cause fire spreading. There is limited comburent in the cabin. Keeping the bonnet closed can control the fire so that the fire can be easily put out). Point the on-board fire extinguisher at the ignition point from the bonnet gap to put the fire out, or seek help from the passing cars. If you can borrow more fire extinguishers, open the bonnet to put it out when you cannot see any flame from outside.
- After the fire brigade put out the fire, ask them for a duty performance certificate and a statement of fire cause.
- After occurrence of the accident, contact the insurance company for post-event handling in a timely manner.



REMINDER

- In order to mitigate losses in the event of an accident, the purchase of commercial insurance (fire loss, theft, etc.) is recommended.

Starting and Driving


Starting the Vehicle

In normal cases, start the vehicle as below:

- Carry a valid smart key with you, depress the brake pedal ① and press the START/STOP button ② at the

same time, and then the OK indicator on the instrument cluster illuminates, indicating that the vehicle is ready for driving.

- Shift to Drive or Reverse, and then the electronic parking brake will be released automatically. Do not start driving the vehicle until hearing a motor release sound from the electronic parking brake system.

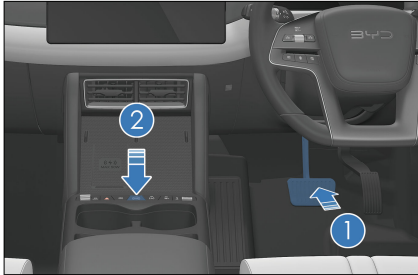

Situations when the vehicle cannot power on

- The vehicle cannot power on in the following situations:
 - After you press the START/STOP button, the smart key warning light turns on, a beep sounds, and the message "No key detected" is displayed on the instrument cluster. This means that the key is not in the vehicle or cannot be detected due to interference.
 - The key is somewhere unsuitable for detection, such as on the floor, in the cup holder, boot, or storage compartment.
- Pressing the START/STOP button may not enable the start function due to:
 - If the electronic smart key does not work, the smart key system warning indicator on the instrument cluster flashes, and the message "Low key battery" is displayed, the key battery may have run out. Replace the

electronic smart key battery as soon as possible and see **P178**.

- Except for causes mentioned above, the smart access and start system also fails to work normally under some conditions due to different service environments. See **P52** for details.

Starting the vehicle in emergencies:

- Engage the parking brake firmly.
- Turn off all unnecessary lights and accessories.
- Shift to Park or Neutral.
- Switch the ignition off.
- The electronic smart key is in the vehicle.
- Press and hold the smart key start button for over 15 seconds.




CAUTION

- Do not touch the power button while driving.

Remote Start

Starting the vehicle

1. Press and hold the remote start/stop button on the electronic smart key for two seconds to start the vehicle. After it is started, turn signals will flash three times.
2. If there is no valid operation within 10 minutes after remote start, the vehicle stops and powers off, and turn signals flash twice.

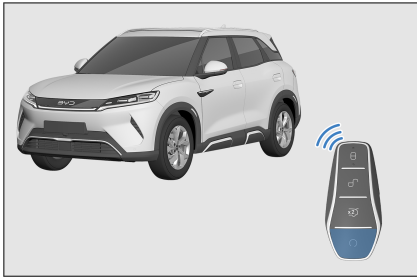

3. After the vehicle is started, pressing and holding the remote start/stop button on the smart key for two seconds switches the ignition off. The turn signals then flash twice.

Driving

Safety Check before Driving

It is advisable to carry out a safety check before driving long distance, which ensures your driving safety and enhances your driving experience. The vehicle can also be taken to a BYD authorised dealer or service provider for inspection.

Exterior

- Tyres: check tyre pressure and carefully inspect tyres for any cut, damage, foreign material, anomaly, and excessive wear.
- Lug nuts: ensure all nuts are fitted and tightened.
- Lighting: make sure headlights, position lights, turn signals and all other lights are working normally. Check headlight intensity.

Interior

- Seat belts: Check whether seat belts can be properly fastened. Verify that seat belts are not worn or scratched.
- Instrument cluster: Particularly, verify that maintenance indicator,

instrument cluster lighting, and defroster work properly.

- Brake pedal: Verify that there is enough space for the brake pedal to work.
- Low-voltage battery and cables: Check connectors for any corrosion or looseness and any cracks in the low-voltage battery housing.

In the engine compartment

- Spare fuses: Verify that spare fuses of all rated charges in the fuse box are available.
- Coolant level: Verify that coolant level is correct.

Check after starting


- Instrument cluster: Confirm that the maintenance indicator and the speedometer work normally.
- Brakes: In a safe area, drive the vehicle straight, hold the steering wheel tightly, decelerate and apply the brake. Verify that the vehicle maintains a straight direction.
- Other abnormalities: Check for loose parts, leaks, and unusual noises.

Preparations Before Driving

- Check the surroundings before getting into the vehicle.
- Adjust seat position, seatback angle, cushion height, headrest height, and the steering wheel angle and height.
- Adjust interior rearview mirror and side mirrors.
- Close all doors.
- Fasten the seat belts.

Gear Shift Controls

- The gear position of the gear shift controls is marked on the gearshift lever. Pull the lever up or down to switch between "R", "N" and "D" and press the button on the end of the lever to switch to the "P" position.
- After starting the vehicle, press the brake pedal and pull the lever up or down, and you may shift from "P" to another position.
- "P" gear is for parking. Press the button to park the vehicle.

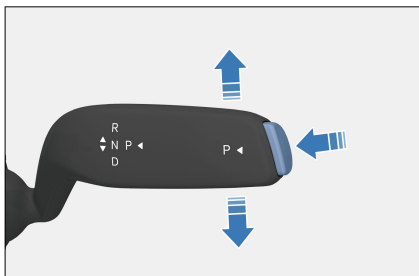

WARNING

- To prevent damaging the transmission, press the "P" button only after the vehicle has completely stopped.
- "R": Reverse, used only when the vehicle has come to a complete stop.
- "N": Neutral, used for temporary stop. Under all circumstances, always shift to Park before the driver gets out.
- "D": Drive, shift to Drive gear to drive the vehicle normally.
- Turn the ignition on before shifting into Drive.
- Shifting out of Park or into a driving gear requires pressing the brake pedal.

For details, see the prompt message on the instrument cluster.

- To prevent unintended vehicle movement, press the "P" button once the vehicle has stopped completely. The electronic parking brake (EPB) is automatically applied and the EPB indicator lights up.
- If the shift is successful, the lever returns to its middle position automatically after it is released.

WARNING

- Transmission may be seriously damaged due to lack of lubrication if the vehicle is allowed to move for too long after the motor is turned off and "N" gear is engaged.
- When the motor is running and the vehicle is in the "R"/"D" gear, always stop the vehicle by stepping on the brake pedal, as there is still force transmitted from the actuator and the vehicle can travel slowly even in its idle condition.
- If you want to shift a gear while driving forward, do not step on the accelerator pedal to prevent accidents.
- Never shift to "R" or press the "P" button while the vehicle is moving, in order to prevent accidents.
- It is not recommended to allow the vehicle to go down a ramp when it is in the "N" or "P" gear, even if the vehicle is not started.
- If the EPB indicator fails to turn on after the vehicle is shifted into "P", go to the infotainment touchscreen to enable the EPB. In that case, contact a BYD

 **WARNING**


authorised dealer or service provider for vehicle inspection as soon as possible.

Electronic Parking Brake (EPB)

Be sure to engage the EPB every time before parking and leaving the vehicle.

Engaging EPB Manually

Drop down the shortcut menu to activate EPB. When the vehicle is not in Park and EPB is released, pressing the brake pedal engages EPB to apply an appropriate parking brake force. The indicator on the instrument cluster flashes and then becomes steady on to indicate that EPB is engaged. The "EPB activated" message is also displayed.

 **CAUTION**

- When (P) flashes, EPB is working. If the vehicle is on a slope, do not release the brake pedal until (P) is steady on. Otherwise the vehicle may move down.

Engaging EPB Automatically

Engaging EPB automatically is designed to improve vehicle safety. Excessive reliance on or frequent use of the function is not recommended. For safety reasons, make sure that the vehicle is shifted into Park and the EPB is engaged before getting off.

Engaging EPB automatically with the ignition off

- When the ignition is switched off, EPB is engaged automatically and (P) lights up on the instrument cluster.

Engaging EPB automatically when shifting into Park

- Press the brake pedal to stop the vehicle steadily and shift into Park. EPB is engaged automatically. Do not release the brake pedal until (P) on the instrument cluster stops flashing and becomes steady on and the "EPB ON" message is displayed.
- Press the brake pedal to bring the vehicle to a complete stop. If the driver's door is opened while the gear is in Drive or Reverse, the vehicle will be automatically shifted to Park and the EPB will be engaged. Do not release the brake pedal until the indicator (P) on the instrument cluster stops flashing and becomes steady on and the "EPB ON" message is displayed.

 **WARNING**

- Refrain from excessively utilizing the automatic EPB engagement triggered by opening the driver's door, as it may result in the EPB not engaging properly or insufficient clamping force, leading to rollaway risks. For safety, make sure that the vehicle is shifted into Park and the EPB is engaged before getting off.
- Do not release the brake pedal early in the process, especially when the vehicle is stopped on a slope, to prevent it from rolling.

Automatic EPB Release upon Vehicle Start


Releasing by shifting gear

- With the vehicle parked, start the vehicle, press and hold the brake pedal, and shift from Park or Neutral into a driving gear such as Drive or Reverse. EPB is released automatically, the indicator goes off, and the "EPB released" message is displayed.

CAUTION

- Be sure to always press and hold the brake pedal when shifting gears. Release the pedal only after the intended gear is displayed on the instrument cluster.
- Within several seconds after the vehicle is started, the EPB system performs a power-on self-test (POST). In this process, the EPB system does not respond to any function.

Releasing by pressing the accelerator pedal

- When the vehicle has been started and the gear is in a driving gear such as "D" or "R", engage EPB manually, then simply press the accelerator pedal slowly to a certain degree. EPB is released automatically and  turns off with the message "EPB released" displayed.

Emergency Braking When Brake Pedal Fails

- During driving, if the braking fails or is blocked, continue to press the P gear switch for over two seconds for emergency braking.

WARNING

- For safety considerations, refrain from using EPB for braking in normal driving. It is preferred to

WARNING


- be used when the brake pedal fails or is blocked.
- As the EPB cannot go beyond the physical limit of road adhesion, activating the emergency brake function may result in vehicle drift, sideslip or deflection when the vehicle passes through bends or dangerous/heavy-traffic road sections, or when the vehicle is driven under severe weather conditions. Be careful to avoid any possible accident.

CAUTION

- For safety considerations, refrain from using the EPB for braking in normal driving. If the brake pedal fails or is blocked, use the emergency braking function while you can always keep the vehicle under control and drive normally.

EPB Trailer Mode

The EPB trailer mode is designed for the situation when EPB is automatically engaged with the ignition off. When the vehicle needs to be powered off for towing, or when it malfunctions, you can switch on the trailer mode to exit parking with EPB.




- You can activate Electronic Parking Brake (EPB) Trailer Mode on the infotainment touchscreen →  → **Vehicle** → **Driving Control**.
- EPB trailer mode activation conditions (all must be met):
 - The vehicle is in Park.
 - Press the brake pedal.

- The charging connector is not connected, and the vehicle is not being charged.

CAUTION

- When the activating conditions of EPB trailer mode are not met, a corresponding prompt message displays on the infotainment touchscreen.
 - After activating the EPB trailer mode, the corresponding screen always displays on the infotainment touchscreen unless you tap to exit the EPB trailer mode.
 - When the vehicle is on a slope and you need to enable the EPB trailer mode, do not release the brake pedal during the process to avoid vehicle slipping.
- EPB trailer mode exit conditions (one of them is enough):
 - Disable the EPB trailer mode on the infotainment touchscreen.
 - Press the "P" button.
 - Charging starts after the charging connector is connected.

EPB System Indicator

- When the vehicle is powered on, if the EPB is engaged,  is solid on on the instrument cluster.
- When the vehicle is powered off, if the EPB is engaged,  on the instrument cluster turns on and then turns off in several seconds.
- When the vehicle is powered on, the EPB system starts self-check. The  indicator on the instrument cluster turns on and then turns off in several seconds. If it does not, the EPB

or braking system may be faulty. It is recommended to contact a BYD authorised dealer or service provider for inspection immediately.

EPB Operating Sound

- EPB motor noises can be heard while the EPB is being engaged or released.
- If there is a burning smell or unusual noises after emergency braking is activated, contact a BYD authorised dealer or service provider immediately.

WARNING

- To prevent the vehicle from moving, make sure the vehicle is in Park and EPB is engaged before leaving the vehicle.
- To prevent serious accidents, never allow any passenger in the vehicle to operate the EPB button when the vehicle is running.
- When the EPB switch is pulled or released, the brake pedal must be pressed to prevent the vehicle from moving, and the subsequent locking of the gearshift that occurs because EPB cannot provide a sufficient parking force.

Automatic Vehicle Hold (AVH)


The automatic vehicle hold (AVH) is activated automatically when the moving vehicle needs to be stationary for longer periods of time, such as in traffic jams on a slope or waiting at traffic lights.

AVH standby

- When the ignition is on, press the AVH switch to enable the function. The AVH

standby indicator (A) is then displayed on the instrument cluster.

- Press the AVH switch again to disable AVH.

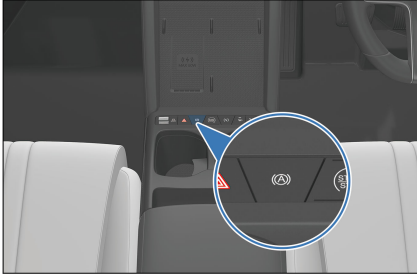

AVH activated

- When the AVH standby indicator (A) is solid on, press and hold the brake pedal until the vehicle stops (vehicle speed reduces to zero) to activate AVH. At this time, the vehicle is in AVH state with (A) displayed on the instrument cluster.

CAUTION

- For AVH to be activated, all of the follow conditions must be met:
 - The driver's seat belt is fastened and the doors are closed.
 - Intelligent power braking system and electronic park brake (EPB) systems are normal.
 - Pressing the accelerator pedal, shifting into Park, or engaging the EPB manually can make AVH exit to the standby status.
 - The AVH is off by factory default.

AVH running

- The AVH runs normally when it is activated, brake lights and the high-mount brake light are on, and the

AVH indicator (A) is solid on on the instrument cluster.

- The AVH function exits to the standby mode after the vehicle stops for 10 minutes, with the AVH standby indicator (A) lighting up and gear shifted into Park.
 - Shift into “D”, drive the vehicle normally, then press and hold the brake pedal until the vehicle stops (vehicle speed reduces to zero) to activate AVH.

AVH exits

- When the AVH function runs normally, the following actions make AVH exit and shift the vehicle from Drive to Park automatically:
 - Opening the driver's door.
 - Unlocking the driver's seat belt.
 - Stopping the vehicle in Drive with EPB activated.
 - Press the AVH switch again to disable AVH when releasing the brake pedal.

AVH suppressed

- Shift into Reverse and then AVH enters the slow-moving condition. When the vehicle is reversing (in Reverse) or shifts from Reverse into Drive to travel at a low speed, AVH cannot be activated but stays on standby to facilitate low-speed vehicle motion.
- To exit slow-moving mode, press the AVH switch or drive at a speed above 6 mph (10 km/h). The AVH function is on standby and can be activated normally.

Driving Precautions

- Drive slowly and carefully along gravel roads. To prevent tyre damage, do not drive over sharp-edged obstacles.

- Slow down on bumpy or uneven roads. Otherwise, the impact may seriously damage wheels.
- Avoid driving through flooded areas as much as possible.
- Slow down when driving against strong winds.
- Cleaning the vehicle or driving through deep water may wet brakes. To keep brakes dry, drive carefully and press the brake pedal gently.
- Drive carefully on slippery roads, such as roads covered in ice, snow or sand, or surfaces such as wet ceramic tiles or epoxy resin. Avoid parking on slopes to prevent vehicle sliding.

WARNING

- The driver shall ensure the riding safety of all passengers in the vehicle, guide them to correctly use vehicle features, and prevent children and other passengers operating in a wrong way.

REMINDER

- The high-voltage battery is located in the vehicle's chassis. Make sure to avoid bumping when driving.
- Before driving, make sure that EPB is fully released and that the EPB indicator light is off.
- Do not leave the vehicle with ignition on.
- Remember to carry the smart key when leaving the vehicle.
- Slow down when driving down steep slopes, and avoid braking too frequently to prevent disc overheating, which affects brake performance.

REMINDER

- Be careful when accelerating or braking on slippery roads. Quick acceleration or sudden braking will cause the vehicle to skid or deviate.
- Make sure no occupant sticks their head or hands outside the vehicle, specially when it comes to children.
- Large amounts of water entering the engine compartment can cause damage to the power system and electrical components.

Winter Driving Precautions

- Make sure the coolant is freeze-proof.
 - Use the same type of coolant as the original model. Fill up the coolant according to the ambient temperature.
 - Improper coolant damages the cooling system.
- Check the condition of the low-voltage battery and the cables.
 - The low-voltage battery's capacity is lower in cold weather, so it must be fully charged when winter comes.
- Avoid door frost.
 - Spray some deicing agent or glycerin in the lock hole to prevent freezing.
- Use anti-freeze washer fluid.
 - These can be found in the BYD authorised dealer or service provider and the auto parts stores.
 - The water and anti-freeze ratio in accordance with the manufacturer's instructions.



CAUTION

- Use special washer fluid to prevent paint damage.
- Prevent ice and snow from going under the fender liner.
 - Ice or snow accumulating under the fender liners makes steering difficult. When driving in cold weather, stop from time to time and check for snow and ice under the fender liners.
- It is recommended to have emergency tools for different road conditions in the vehicle.
 - It is advisable to have snow chains, window scraper, bags of sand and salt, flashing signal, a shovel and connecting cables in the vehicle.
- Snow chains are only for emergencies or areas where they are permitted by laws.
- Snow chains should be installed on rear wheels. Be careful when driving the vehicle installed with snow chains on snow-covered roads. Some snow chains may damage the tyres, wheels, suspension, or vehicle body. It is recommended to use thin snow chains with a thickness or diameter no greater than 10 mm to ensure adequate clearance between the tyres and other components inside the wheel well.
- Read the component assembly drawings and other instructions provided by the snow chain manufacturer carefully.
- Before purchasing and installing snow chains, consult a BYD authorised dealer or service provider where your vehicle was purchased.
- In order to minimise wear of tyres and snow chains, do not travel with snow chains on roads without snow.



REMINDER

- Driving speed must not exceed 19 mph (30 km/h) or the speed limit specified by the snow chain manufacturer.
- Drive carefully, paying attention to bumps, potholes, and sharp turns that can cause the vehicle to bounce.
- For vehicles with snow chains, avoid sharp turns or braking with locked wheels, and slow down the vehicle before entering a curve to avoid accidents due to loss of control.
- Install the chains symmetrically on the left and right sides and remove them immediately after driving out of snowy or muddy roads.
- If abnormal noise is heard from the snow chain, it indicates that the chain may contact vehicle components such as suspension, body or brake lines. In this case, stop the vehicle immediately for inspection.
- When installing the snow chain, park the vehicle on a flat surface away from traffic, turn on the hazard warning lights, and place a warning triangle at the rear of the vehicle.
- Before installing snow chains, engage the parking brake.
- Do not install snow chains with insufficient tyre pressure.
- When using snow chains, be careful not to damage the wheel rims.

Winter Tyres

- Winter tyres provide better traction on snowy roads. The special rubber tread pattern makes the tyres less affected by low temperatures and delivers excellent braking performance to improve driving safety.

Usage tips

- It is recommended to use winter tyres in snow or ice conditions or at temperatures below 44.67°F (7 °C). When temperatures rise to above 44.67°F (7 °C), install summer or all-season tyres instead for driving safety and better performance.
- Winter tyres must be the same size, load index, and speed rating as those originally provided by BYD.
- Winter tyres must have adequate tread depth. Tyres with a tread depth less than 0.16 in. (4 mm) do not perform well in winter conditions.
- Winter or summer tyres are designed for specific acceleration conditions. Use them in the corresponding seasons to avoid poor traction or braking performance.
- Do not exceed the speed rating of winter tyres, which is relatively low.
- After installing winter tyres, inflate them to the design pressures.

Driver Assistance




Adaptive Cruise Control (ACC)

- Adaptive Cruise Control (ACC), an extension of the traditional regular cruise control, uses the front sensor to detect the relative distance and speed of the vehicle ahead, so as

to control vehicle speed accordingly. The system switches between regular cruise control and ACC depending on whether there is a vehicle ahead.

- Cruise speed and time interval from the vehicle ahead can be set by using the cruise buttons. You can set the cruise control speed within the 30-150 km/h (20-95 mph) range, or set a fixed distance from the vehicle ahead to cruise at speeds between 0 to 150 km/h (0 to 95 mph)

Status Description

- ACC standby:
 - Once enabled, the system is on standby by default and can be manually activated. If the vehicle does not meet activation conditions, it must be checked until such conditions are met. At this time,  (with a variable cruise speed value) is displayed on the instrument cluster.
- ACC activated:
 - The system is operational. It maintains the set speed or automatically adjusts the distance from the vehicle ahead. At this time,  (with a variable cruise speed value) is displayed on the instrument cluster.
- Over speed:
 - When you step the accelerator pedal while ACC is active, the vehicle responds to your action so that ACC is temporarily deactivated until you release the pedal.
- ACC failure:
 - There has been a failure in the system. No operation can be performed, and the ACC failure indicator  lights up on the instrument cluster. It is recommended to bring the vehicle to



a BYD authorised dealer or service provider for maintenance and repair.


ACC Activation Conditions

- EPB is released.
- The vehicle is in Drive.
- The vehicle does not slide backwards.
- The boot, bonnet, and all doors are closed.
- The driver seat belt is fastened.
- The ESC system is on, but not activated yet.
- The vehicle speed is not greater than 95 mph (150 km/h).
- Brake pedal is pressed or AVH is activated at speed 0; or brake pedal is not pressed at speeds above 0.
- There is no vehicle network communication failure prompt on the instrument cluster.
- The AEB function is not activated.


Cruise Button Operation

ACC activation/exit button

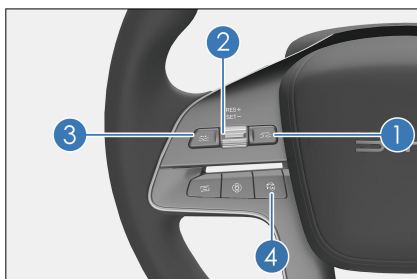


- When the vehicle is powered on and  is displayed on the instrument cluster, press  to activate ACC (with ICC switch on the infotainment touchscreen off, this button is ACC switch). The current speed is set as the cruise speed and the maximum allowable speed is 150 km/h. If the current speed is below 18 mph (30 km/h), the cruise speed is set to 18 mph (30 km/h).





Resetting ACC

- When the ACC system is on standby within the same ignition cycle, the system memorises the last speed setting. Push up the lever  to revert to the stored speed prior to exiting the cruise system. If the system does not memorise any vehicle speed (ACC is activated for the first time in this cycle), the "RESET" button will not activate the ACC.

Increasing/Decreasing target speed

- When the system is operational,  is displayed on the instrument cluster. It maintains the set speed or automatically adjusts the distance from the vehicle ahead. At this time, the speed can be adjusted by toggling the rocker switch  upward (acceleration) or downward (deceleration). Toggling the rocker switch  up/down each time increases/decreases target speed by 3 mph (5 km/h). Press and hold the rocker switch up/down to continuously increase/decrease the vehicle target speed by 3 mph (5 km/h).

Exiting ACC

- When ACC is activated, if the vehicle is not stationary, the function can be exited by pressing button  or stepping on the brake pedal. If the vehicle is stationary, the function can be exited by pressing button .

Setting vehicle distance

- The driver has responsibility to keep a safe distance from the vehicle ahead.
- Press ① or ③ to decrease or increase the following distance from the vehicle ahead. Each setting corresponds to a following distance. The faster the speed, the longer the distance.

Increasing/Decreasing speed with ACC active

- When ACC is activated, you can press the accelerator pedal to reach the set target cruise speed in advance. The system then enters over speed mode. At the target cruise speed, if you accelerate without performing any other operations, the vehicle accelerates and then returns to the target cruise speed after the accelerator pedal is released. If you press the brake pedal to slow down the vehicle speed continuously, ACC goes into standby mode. After the brake is released, ACC needs to be reactivated by pressing the button.

Follow-to-stop/start

- ACC brings the vehicle to a stop when the vehicle ahead stops in normal driving conditions. It automatically accelerates the vehicle away from a standstill if the vehicle ahead pulls away within a short period of time.
 - If the vehicle stops for a time period between 30 seconds and three minutes, press the accelerator pedal or push up the rocker switch ② to reactivate ACC.
 - If the vehicle stops for more than three minutes, the ACC system will exit and EPB will be engaged.

System Limitations

- Reaching or leaving a curve may delay or disturb target selection. In such cases, the ACC vehicle may

not decelerate as expected or may decelerate late.

- On roads with sharp curves, such as winding roads, the vehicle ahead may be out of ACC sensor detection for several seconds due to sensor vision limitations, possibly causing the ACC vehicle to accelerate automatically.
- Traffic flow and weather conditions - such as rain and fog - must be heeded for setting vehicle distance on the ACC system. After the ACC system is properly set, the driver must be able to decelerate until the vehicle stops at any time.
- The ACC system may not be able to identify stationary or slow-moving objects, such as vehicles, the end of traffic, toll booths, bicycles, motorcycles, or pedestrians. This means a risk of collision and requires the driver to beware of the surroundings.
- The ACC system cannot identify pedestrians or oncoming vehicles.
- The ACC system can only achieve limited braking instead of emergency braking.
- ACC cannot be activated in special driving modes* like tow/snow/mud/sand/terrain.

Precautions

- ACC is a comfort system rather than a safety system, obstacle detector or collision warning system. The driver must keep control of vehicle at all times and be fully responsible for the vehicle.
- The ACC assists the driver, but is not a substitute for the driver. Drivers must abide by traffic rules and keep vehicle control at all times and be fully responsible for their vehicles.

- For safety reasons, ACC cannot be activated with ESC disabled.
- The ACC is suitable for highways and roads in good conditions, rather than complex urban or meandering roads.
- It is the driver's responsibility to keep distance from the vehicle ahead. The ACC system's vehicle distance meets the minimum distance required in driving environments in the country.
- Vehicle control is transferred to the driver if the accelerator or brake pedal is pressed with ACC activated. As a result, the ACC system cannot keep a safe distance from the vehicle ahead.
- The ACC may have no or slow responses to a vehicle ahead that brakes suddenly (emergency stop), resulting in a risk of late braking. In such cases, there will be no take-over request.
- In some cases, such as when the vehicle ahead is going too slow, when lane change is too fast, or when the safe distance from the vehicle ahead is too short, there is no adequate time for the system to decrease the relative speed, so response has to come from the driver. The system cannot give audible or visual warnings in every case.
- If ACC is activated with the vehicle stationary, the system identifies any stationary obstacle ahead and keeps the vehicle still to ensure a safe startup and prevent collision. However, this function cannot identify all the obstacles, so the driver must be alert to the front obstacles or other traffic participants.
- A short distance from an adjacent lane (or a vehicle on an adjacent lane that is too close to the ACC vehicle's lane) may trigger ACC to brake.
- ACC cannot target vehicles with too small contact ratio, so the driver must keep control of the vehicle.
- When the vehicle stops as it follows a vehicle ahead, in rare cases (e.g. special vehicles like empty or half-loaded trailers), the system does not recognise the end of the vehicle ahead but the lower end of the target (e.g. the rear axle of a truck with a high chassis or a vehicle bumper). In such cases, the system cannot ensure proper stop distance, so the driver must stay alert and be ready to brake.
- Modifying the vehicle structure, such as lowering the chassis or changing the front license mounting plate, may affect the ACC system.
- Do not use the ACC system when visibility is poor, or when driving on slopes, winding roads, or wet roads (covered in ice/snow or flooded).
- When ACC is activated and the vehicle is stationary behind another vehicle, if the steering wheel is turned at a large angle, ACC will judge that the driver wants to change lanes and start, and ACC will exit.
- When AVH is activated (the vehicle is stationary), the activation of ACC will cause the AVH to exit. Press the ICC/ACC/RESET+ button again, and the vehicle will idle (ACC exits) or cruise (ACC does not exit).
- Make sure to go to a BYD authorised dealer or service provider for professional calibration and checking of the front camera in any of the following situations:
 - The front bumper, or front windscreen has been removed.
 - Wheel alignment has been carried out.
 - The vehicle has experienced a collision.

- ACC system performance has degraded or the instrument cluster has prompted a system error.

WARNING

- ACC serves as a driver assistance function only, so the driver is fully responsible for driving safety.
- Influence of weather, road conditions, and other factors may cause ACC to fail.
- Use ACC based on your needs, traffic, and road conditions.

Intelligent Cruise Control (ICC)


- ICC adds the function of centring the vehicle in the current lane to the existing ACC's functions of speed control and distance keeping. The system helps control the vehicle both longitudinally and transversely at speeds between 0-80 mph (0-130 km/h) to reduce the driving burden and provide a safe and comfortable driving environment.
- When the function is enabled, the driver must always hold the steering wheel and control the vehicle when necessary.
- ICC detects whether the driver holds the steering wheel in real time. When the take-over request displays on the instrument cluster, hold the steering wheel immediately to avoid danger. If the driver ignores the request and fails to take over the steering wheel in time, the ICC function will continue to alarm.

ICC activation conditions

- EPB is released.
- The vehicle is in Drive.



- The vehicle does not slide backwards.
- The boot, bonnet, and all doors are closed.
- The driver seat belt is fastened.
- The ESC system is on, but not activated yet.
- Vehicle speed is not greater than 80 mph (130 km/h).
- Brake pedal is pressed or AVH is activated at speed 0, or brake pedal is not pressed at speeds above 0.
- There is no vehicle network communication failure prompt on the instrument cluster.
- The AEB function is not activated.
- Two-way lane lines are clear and the vehicle is at the centre of the lane.

How to Use


- To enable or disable ICC, go to the infotainment touchscreen →  → **ADAS** → **Driving Assist** or press the button ④ on the steering wheel. This function can only be disabled on the infotainment touchscreen when the vehicle is in "P". When the vehicle is started, the system defaults to previous settings.
- (By default, when the function is activated, the current speed is set as the cruise speed. If the current speed is below 18 mph (30 km/h), the cruise speed is set to 18 mph (30 km/h). At this time, the speed can be adjusted by toggling the rocker switch ① upward (acceleration) or downward (deceleration). Toggling the rocker switch ① up/down each time increases/decreases target speed by 3 mph (5 km/h). Press and hold the rocker switch ① up/down to continuously increase/decrease the

vehicle target speed by 3 mph (5 km/h).



- When the ICC function is enabled, the standby state indicator  lights up on the instrument cluster.
- When the ICC function is activated, the activated state indicator  lights up on the instrument cluster.

When ICC is operational, the vehicle drives by the set speed or by automatically adjusting the distance from the vehicle ahead.

- When the ICC malfunctions,  is displayed on the instrument cluster.

Precautions

- ACC function precautions must be followed when using ICC.
- When ICC is turned on and activated at vehicle speeds between 0–80 mph (0–130 km/h):
 - If there is no lane lines ahead, transverse ICC control is suppressed and only ACC works. In that case, ICC system is standby.
 - If lane lines ahead are clear and recognisable, transverse ICC control is activated automatically. In that case, ICC system is activated.
- The ICC system is a driving assistance system, not an automatic driving system. The driver should keep control of the vehicle at all times, and their

hands should not leave the steering wheel for a long time. Otherwise, the system will exit after prompting the driver to take over the control.

- The ICC system can be affected by weather conditions, lighting and clarity of lane lines. Performance degrades significantly in situations such as backlighting, sunset, snow covered roads, and severely damaged roads.
- Do not use the ICC system on winding roads with sharp turns, icy and slippery bends, or under weather conditions, such as dense fog, heavy rain and heavy snow, liable to hinder the sensing operation of the multi-purpose camera.
- ICC cannot be activated in special driving modes* like tow/snow/mud/sand/terrain.
- Situations where ICC cannot be used include:
 - The sensor is blocked.
 - The vehicle is running under severe weather conditions.
 - Active safety function has been triggered.
 - Vehicle speed exceeds the specified range.
 - The road is too curvy.

WARNING

- ICC serves as a driver assistance function only, so the driver must be fully responsible for driving safety.
- Influence of weather, road conditions, and other factors may cause ICC to fail.
- When the vehicle is passing through a sharp bend, ICC may

WARNING


be automatically disabled if its turning capacity is exceeded. The driver must always pay attention to road conditions and ICC states.

- Use ICC based on your needs, traffic, and road conditions.


Forward Collision Warning (FCW) and Automatic Emergency Braking (AEB)


FCW and AEB use multi-purpose camera to detect with vehicles ahead or pedestrians. When detecting a risk of collision, the system gives audible and visual alarms to alert the driver and improve the potential braking pressure for better response timing. If detecting increased risk of collision, the system automatically applies braking pressure to assist in collision avoidance or impact reduction.



How to Use

To enable or disable FCW and AEB, go to the infotainment touchscreen →  → **ADAS** → **Safety Assist**.



Forward collision warning (FCW)

- Safe distance warning
 - If the vehicle is too close to the vehicle ahead at speeds above 41 mph (65 km/h) for too long, the system gives a safety distance warning, and  lights up on the instrument cluster.
- Pre-warning
 - If the vehicle travels at speeds between 19 mph (30 km/h) and 93 mph (150 km/h) and the system

recognises a risk of collision with a vehicle ahead, the system will give a warning visually and audibly, and the indicator  on the cluster will light up and the buzzer will alarm. The driver needs to promptly take appropriate actions to ensure safe driving distance.

- Emergency warning
 - If the vehicle travels at speeds between 19 mph (30 km/h) and 93 mph (150 km/h) and the driver fails to respond to the pre-warning, the system will give a warning visually and audibly.  flashes and there is a short braking warning. The driver needs to promptly take appropriate actions to ensure safe driving distance.
- Malfunction
 - When  is displayed on the instrument cluster, there has been a failure in the system.

Automatic emergency braking (AEB)

- If the driver fails to respond to the emergency warning and the risk level increases, the system will engage braking force as much as possible to avoid collision or reduce crash impact. The system gives a warning visually and audibly:  lights up on the instrument cluster and the buzzer alarms.
- If the driver applies insufficient braking force in an emergency, the braking system provides additional braking force to reach the optimal level required to avoid collision or reduce crash impact.
- Malfunction
 - When  is displayed on the instrument cluster, there has been a failure in the system.

FCW&AEB Activation Conditions

- This function has been turned on in the infotainment touchscreen.
- The vehicle is in Drive.
- The vehicle does not slide backwards.
- Release the brake pedal.
- The driver seat belt is fastened.
- The ESC system is on, but not activated yet.
- The vehicle speed is greater than 3 mph (4 km/h).
- The boot, bonnet, and all doors are closed.

System Limitations

- Detection may be affected or delayed in some environments. If the radar reflective cross section of the target (a bicycle, three-wheelers, four-wheelers, motorised bicycle or motorcycle, for example) is too small, the system may not be able to establish its distance to the target ahead, resulting in either late or no response to those vehicles.
- FCW may be affected or give no response in the following cases:
 - On rainy, snowy or foggy days, large water splashes, or exposure to direct sunlight or glaring lights, or significantly varying lighting conditions.
 - Dirty, hazy, damaged or blocked sensor.
- In complex traffic, the system may be unable to properly respond to the following circumstances:
 - Pedestrians or vehicles move too quickly into the sensor's detection range.
 - Pedestrians are obscured by other objects.

- Pedestrian outlines are indistinguishable from the surroundings.
- Pedestrians are not detected, due to, for example, coverage by special clothing or other materials.
- The vehicle is on a sharp curve.

Precautions



- FCW cannot ensure zero collision. In complex traffic, the system cannot always clearly identify all the vehicles or pedestrians. FCW may trigger unnecessary warning or braking action for well covers, iron plates or road signs.
- Make sure to drive safely and observe surrounding traffic conditions. AEB is not a substitute for normal braking operation in any event.
- Do not overly rely on FCW as this may result in severe injuries or deaths. The system is only an auxiliary safety tool. The driver must always keep a safe distance from vehicles ahead, control the speed, and be ready to brake or steer away when necessary. The driver must keep control of the vehicle at all times and be fully responsible for safe driving.
- The AEB system is activated at vehicle speeds above 3 mph (4 km/h), but it can only reduce vehicle speed by up to 37 mph (60 km/h). Careful driving is always required, because the system may not be triggered correctly.
- AEB cannot work normally when the ESC function is disabled or the fault light is on.
- If FCW gives an alarm, the driver must brake based on traffic conditions to decrease vehicle speed or steer away from obstacles.

- If the vehicle travels too close to the vehicle ahead for too long, a safety distance warning will be given. If the vehicle ahead brakes suddenly, collision may be unavoidable.
- The system will not trigger AEB when the driver is aware of an emergency warning, but turns the steering wheel, or presses the accelerator pedal or brake pedal hard.
- Sometimes the multi-purpose camera detect dirt or foreign matter on its surface. In this case, a message is displayed on the instrument cluster and both FCW and AEB are disabled. During the sensor failure, FCW and AEB are disabled. They will returns to normal after troubleshooting.
- The pedestrian protection function is limited by certain physical conditions and it may not be able to take effect within the 3-37 mph (4-60 km/h) speed range as required. Therefore, the responsibility to use brakes timely and effectively always lies in the driver. Pedestrian protection warnings and preventive braking depend on the actual situation.
- The system cannot completely protect pedestrians or avoid accidents and severe injuries on its own.
- Under certain complex conditions, such as on winding roads, the pedestrian protection function may trigger unnecessary warning or braking.
- In case of system failure due to radar or multi-purpose camera misalignment, the pedestrian protection function may trigger unnecessary warning or braking.
- When AEB is triggered, a large amount of hydraulic pressure will be required to push the caliper in a short time and there will be a sizzling noise.
- The FCW system is triggered only with doors closed and seat belts fastened. It fails to work in the following cases:
 - Any door is not closed or it is opened when the vehicle is moving.
 - The seat belt is not fastened or it is unfastened when the vehicle is moving.
 - The driver brakes hard.
 - The driver presses throttle hard.
 - The drivers frequently switches between the accelerator and brake pedals.
- System performance may be reduced in the following cases:
 - Strong front bumper impact from accidents or other causes.
 - Improperly inflated or worn out tyres.
 - Unqualified tyres installed.
 - Snow chains installed.
 - Use of a small spare tyre or tyre repair kit.
- Make sure to go to a BYD authorised dealer or service provider for professional calibration of medium range radar in any of the following situations:
 - The multi-purpose camera has been dismantled.
 - Toe-in or rear camber has been adjusted during wheel alignment.
 - The vehicle experienced a collision.
 - ACC system performance has degraded or become abnormal.
- Do not try to test FCW with carton, iron plate, dummy and other objects. The system may not work properly and thus result in accidents.

Traffic Sign Recognition (TSR)

The traffic sign recognition system identifies speed limit signs on the road through the multi-purpose camera and map*. When the speed limit icon on the instrument cluster lights up, it means the vehicle speed should be within range.

How to Use

- Enable or disable this function on the infotainment touchscreen →  → **ADAS** → **Safety Assist**.
- When the system identifies a speed limit sign, the speed limit icon identified displays (such as ) on the instrument cluster. When the instrument cluster shows the speed is over the identified speed limit, the icon on the instrument cluster flashes to alert the driver. When the system identifies the end of speed limit icon or after the vehicle travels for a while, the speed limit icon disappears.

Precautions

- The speed limit icon disappears from the instrument cluster within a certain distance after system recognition. The driver must control speed within range.
- The traffic sign recognition system can identify speed limit signs only, and will not control speed. The control over the vehicle always vests in the driver. Please drive properly.
- When there are several speed limit signs on side-by-side lanes, the system recognises the limit sign of current lane to display the speed limit alert icon. The driver must remain in the correct lane.

- Weight limit signs not in standard size as per national regulations may mistakenly be identified as speed limit signs.
- If a speed limit sign is unclear or distorted, inclined, reflective, partly blocked or covered, the camera may be unable to recognise the sign completely or clearly.
- TSR performance depends on weather conditions, lighting, and sign visibility. The system may fail to or incorrectly identify the sign at night, at sunset, or in rainy, foggy, hazy, snowy or dusty environment, when light is coming from the back of the vehicle, or when there is a sudden change in lighting.
- In case there is a collision or the camera sensor has been reassembled, it is recommended to go to a BYD authorised dealer or service provider for sensor calibration so as to avoid affecting system performance.

WARNING

- TSR serves as a driver assistance function only, so the driver must be fully responsible for driving safety.
- Influence of weather, road conditions, and other factors may cause TSR to fail or lead to late alarms.
- Use TSR based on your needs, traffic, and road conditions.


Intelligent Speed Limit Control (ISLC)

- Intelligent speed limit control (ISLC) incorporates functions of adaptive cruise control (ACC) and traffic sign recognition (TSR). With the system enabled, if the vehicle travels faster

than the detected speed limit, the system prompts whether to set cruise speed to that limit. After the driver confirms (by toggling down the rocker switch), the system will automatically set cruise speed to the limit to prevent speeding.

- This function is accessible at the 20–95 mph (30–150 km/h) range of speed.

How to Use

- To enable or disable ISLC, go to infotainment touchscreen →  → **ADAS** → **Safety Assist**.
- When TSR is disabled, ISLC also ceases to function.
- With TSR on, ISLC can be enabled or disabled depending on your needs.
- ISLC can be activated provided that ACC and TSR are active.

Precautions

- ISLC cannot be activated if special driving modes such as trailer*/snow*/mud*/sand*/terrain* are enabled.
- ISLC is a driving assistance system, so the driver should keep control of vehicle at all times.
- ISLC performance depends on weather conditions, lighting, and traffic sign visibility. The system may fail to or incorrectly identify the sign at night or sunset, in rainy, foggy, hazy, snowy or dusty environment, when light is coming from the back of the vehicle, or when there is a sudden change in lighting.
- ISLC integrates ACC and TSR. Therefore, the function precautions of ACC and TSR must be followed when using ISLC.

- In case there is a collision or the camera sensor has been reassembled, it is recommended to go to a BYD authorised dealer or service provider for sensor calibration so as to avoid affecting system performance.




WARNING




- ISLC serves as driver assistance only, so the driver must be fully responsible for driving safety.
- Influence of weather, road conditions, and other factors may cause ISLC to fail or lead to late alarms.
- Use ISLC based on your needs, traffic, and road conditions.

Intelligent High Beam Control (IHBC)

Intelligent high beam control (IHBC)* assesses current driving conditions by using multi-purpose camera sensors and automatically activates or deactivates the high beam accordingly, when vehicle speed exceeds 22 mph (35 km/h).

How to Use

- Enable or disable IHBC on the infotainment touchscreen →  → **Light** → **Exterior Light**. When the vehicle is started, the system defaults to previous settings.
- With the function enabled, when you set the light switch to the auto lights  position, the light meets conditions and vehicle speed exceeds 22 mph (35 km/h), the system automatically switches between low and high beams based on the current driving environment. When the function is activated, the IHBC indicator  will light up on the instrument cluster.

- When the IHBC function is enabled, the standby state indicator  lights up on the instrument cluster.
- When the IHBC function is activated, the activated state indicator  lights up on the instrument cluster.
- When the IHBC malfunctions, the fault indicator  lights up on the instrument cluster.

Precautions

- The IHBC system is an auxiliary light control function. While it is recommended to use the system at high vehicle speeds, the system cannot completely replace the driver's judgement. The driver must observe road regulations and actively switch between high and low beams according to road condition changes at all times.
- Beam switching is suppressed if the vehicle is in a high dynamic state, for example when ABS or ESC is activated.
- The system exits when you turn fog lights or turn signals on, set wipers to fast mode, are backing up, or set the light switch to a position other than auto lights, or when the environment has too much lighting.
- Even if IHBC is working, it may be triggered incorrectly or stop working due to inevitable environmental factors and conditions, so driver control is always required. Typical situations are:
 - The driver's stick operation to switch to the high beam is prioritised.
 - The weather, such as fog, rain or snow, is extremely terrible for driving.
 - There are traffic participants with poor lighting (such as pedestrians

and bicycles), railways or waterways nearby, or wild animals on the roads.

- There are strongly reflective objects around, such as traffic signs on highways and water reflection on the road surface.
- The front windscreen is dirty, covered in mist, or blocked by stickers or decorations.
- In case the vehicle has been involved in a collision or the sensor has been reassembled, go to a BYD authorised dealer or service provider for sensor calibration so as to avoid affecting system performance.

WARNING

- IHBC serves as a driver assistance function only, so the driver must be fully responsible for driving safety.
- Influence of weather, road conditions, and other factors may cause IHBC to fail.
- Use IHBC based on your needs, traffic, and road conditions.

Lane Departure Assist (LDA)



Lane Departure Assist (LDA) contains two sub-functions: Lane Departure Warning (LDW) and Lane Departure Prevention (LDP). LDW and LDP work within the speed of 38-93 mph (60-150 km/h).

- Lane Departure Warning (LDW)
 - The function identifies the front lane lines by the front camera on the upper front windscreen. When the driver unconsciously departs from the current lane, the system issues instrument icons, buzzer sounds, or steering wheel vibration alarms to




alert the driver by computing the relative distance between the vehicle and lane lines and considering the surroundings.

- LDW is turned on by factory default, and the alarm mode defaults to steering wheel vibration. When lane lines are detected, instrument lanes are white or grey; when LDW is activated, the virtual lane lines on the side where the vehicle rolls over lane lines turn red.
- Lane departure prevention (LDP)
 - The function identifies the front lane lines by the front camera on the upper front windscreen. When the driver unconsciously departs from the current lane, the system controls the steering wheel to correct lane departure after calculating the relative position of the vehicle and lane lines and considering the surroundings.
 - LDP is turned off by factory default and can be activated manually.
 - During the activation of LDP, the system gives an alarm when the driver's hands are off the steering wheel. Hands-off alarm includes prompt messages, icons, and sounds.

How to Use

- To enable or disable LDW and LDP, go to the infotainment touchscreen →  → **ADAS** → **Safety Assist**. When the vehicle is started, the system defaults to previous settings.
- To adjust the alerting way of LDW and LDP, go to the infotainment touchscreen →  → **ADAS** → **Safety Assist**.

Warnings of LDW and LDP include:
Sound, vibration or both.

- When LDW or LDP is enabled,  is displayed on the instrument cluster.
- LDP activates with a function status icon  solid on after flashing and the virtual lane lines on the side where the vehicle rolls over lane lines turn blue.
- After LDP is activated, if the driver's hands are off the steering wheel, a prompt message is displayed on the instrument cluster to remind the driver to hold the steering wheel. Hands-off alarm varies with the driver's hands-off frequency in a short time. The message "Please turn the steering wheel gently" displays on the instrument cluster for the first hands-off; "Please hold the steering wheel" for the second; "Please take over immediately" for the third and above.
- When LDW or LDP fails,  is displayed on the instrument cluster with a reminder sound and a pop-up prompt message.

System Limitations

The detection of lane lines by the front camera is easily interfered by the environment. The following situations may lead to failure or performance degradation of the system:

- Poor visibility on snowy, rainy, or foggy days
- Dirty or fogged front windscreen, or blocked front camera
- Glaring from direct sunlight, reflection in puddles, or oncoming vehicles
- Sudden changes in light, such as when the vehicle is entering or exiting a tunnel
- Lane lines obscured by tree shadows on roads in direct sunlight on sunny days

Precautions

- LDW will be suppressed if a turn signal is used and the vehicle changes lane as indicated by the turn signal.
- LDW may be suppressed if the vehicle travels over lane lines, or lane lines are unclear, too thin, worn, blurred or covered by dirt/snow.
- LDW may be suppressed if the lane is too wide or too narrow, the number of lanes increases or decreases, lane markings change suddenly on ramps or exits, or in situations of complex line arrangements.
- LDW may be suppressed on slopes or winding roads when the vehicle travels too close to the vehicle ahead or when the vehicle ahead obscures lane lines.
- LDW may be suppressed when the vehicle jolts, accelerates or decelerates too quickly, or takes a sharp turn.
- The system operation may be affected if the windscreen within the camera visual field is cracked, if the glass is dyed or inadequately coated; or if any reflecting object is placed on the dashboard or any other object interferes with camera sight.
- LDA system tries to keep the vehicle from deviating from its own lane, but it cannot keep the vehicle running in the middle of the lane.
- For safety reasons, do not test LDW function on your own. The view of front camera cannot be blocked by objects or exposed to strong light. The function recovers once conditions return to normal. If it does not, it is recommended to contact a BYD authorised dealer or service provider.
- Disabling the LDW is recommended under any of the following circumstances:
 - Driving in a sporty style

- Severe weather conditions
- On uneven roads
- Situations where lane lines may not be identified include, but are not limited to:
 - Unclear lane lines
 - Incomplete lane lines
- Situations that may result in detection failure of the camera or late activation of the function include but are not limited to:
 - The front camera came off, is loosely installed, or is blocked.
 - The vehicle is running under extreme weather, such as rain, snow, or smog.
 - Partially or completely blocked camera lens.



WARNING


- LDA serves as a driver assistance function only, so the driver must be fully responsible for driving safety.
- Influence of weather, road conditions, and other factors may cause LDA to fail.
- Use LDA based on your needs along with traffic and road conditions.




Emergency Lane Keeping Assist (ELKA)

The emergency lane keeping assist (ELKA) system identifies lane lines ahead through a multi-purpose camera and identifies vehicles approaching from behind on the adjacent lanes through rear corner mmWave radars. It comes to work within the 38-93 mph (60-150 km/h) vehicle speed range when the

vehicle drifts out of solid lane lines, is about to cross a road edge, or has a risk of colliding with oncoming vehicles or vehicles that are passing it on adjust lines. The system activates electric power steering (EPS) system to provide reverse torque, keeping the vehicle in the current lane.

How to Use

To enable or disable this function in  → **ADAS** → **Safety Assist**.

- When ELKA is active,  flashes on the instrument cluster.
- In the event of ELKA malfunction,  is displayed on the instrument cluster.
- If you disable ELKA manually by pressing buttons,  is displayed.

System Limitations

ELKA may detect incorrect or no lane lines in complex traffic. In the following cases, the system may fail to work or its performance degrades significantly.

- Poor visibility on snowy, rainy, or foggy days
- Dirty or fogged windscreen, or blocked multi-purpose camera
- Glaring from direct sunlight, reflection in puddles, or oncoming vehicles
- Sudden changes in light, such as when the vehicle is entering or exiting a tunnel
- Lane lines obscured by tree shadows on roads in direct sunlight on sunny days
- Unidentifiable road boundary with grass, soil or kerb.

Precautions

- Situations where lane lines may not be identified include, but are not limited to:
 - Pedestrians, animals, and specialty or specially-shaped vehicles
 - Unclear or incomplete lane lines
- Situations that may result in detection failure of the camera or late alarm include but are not limited to:
 - The front camera came off, is loosely installed, or is blocked.
 - The vehicle is running under extreme weather, such as rain, snow, or smog.
 - Partially or completely blocked camera lens.
- Situations that may result in detection failure of mmWave radars or late alarms include, but are not limited to:
 - MmWave radar(s) come off, are loosely installed, or are blocked.
 - The vehicle is running under extreme weather, such as rain, snow, or smog.
 - The vehicle encounters certain metal guardrails or similar road conditions.

WARNING

- ELKA serves as a driving assistance function only, so the driver is fully responsible for driving safety.
- Influence of weather, road conditions, and other factors may cause ELKA to fail.
- Use ELKA based on your needs, traffic, and road conditions.

Blind Spot Assist (BSA)

Blind spot assist (BSA) includes blind spot detection (BSD)*, rear cross traffic alert (RCTA)*, rear cross traffic braking (RCTB)*, rear collision warning (RCW)*, and door open warning (DOW)*.

Blind spot detection (BSD)*

- At vehicle speeds between 10–93 mph (15–150 km/h), if a rear corner mmWave radar detects a vehicle in blind spots on an adjacent lane or a vehicle approaching quickly on the adjacent lane, the indicator on the corresponding side mirror lights up. If the turn signal for the same side is turned on at this moment, the alarm indicator on the side mirror flashes to alert the driver of a risky lane change.



Rear cross traffic alert (RCTA)*

- When the vehicle is reversing, the RCTA system detects the vehicles travelling in the blind spot at the back. If the system determines that a vehicle approaching from behind poses a risk of collision, the side mirror warning indicators flash and an audible alarm is given to alert the driver, reducing the possibility of collision.

Rear cross traffic braking (RCTB)*

- RCTB detects collision risks if the vehicle meets another vehicle crossing the road when leaving a vertical/slanted parking space. It gives a warning and helps the driver

brake to prevent collision. If the system determines that a vehicle approaching from behind poses a risk of collision, it performs emergency braking automatically, especially when the visual field of the driver is blocked by the vehicle parking beside.



Rear collision warning (RCW)*



- If the vehicle detects a risk of collision with a vehicle approaching quickly from behind on the current lane, the hazard warning light turns on to warn the driver in that vehicle against a possible collision and the indicators on the side mirrors flashes to warn the driver in this vehicle to drive safely.

Door open warning (DOW)*

- When the vehicle is stationary with doors unlocked, the system keeps indicators on side mirrors solid on to warn the driver if moving objects, such as bicycles or automobiles, on an adjacent lane are approaching from behind. At the same time, an icon is displayed on the instrument cluster. If the driver or passengers attempts to open the door at this time, indicators on side mirrors begin to flash and a chime sounds.

How to Use

- Enable or disable BSD*, DOW*, RCW*, RCTA* or RCTB* on the infotainment touchscreen →  → **ADAS** → **Safety Assist**. When the vehicle is started, the system defaults to previous settings.
- When the BSA functions are disabled, no indicator lights up on the instrument cluster.
- When the BSA function is enabled, the standby state indicator  lights up on the instrument cluster.

- When the BSA function is activated, the activated state indicator  lights up on the instrument cluster.
- When BSA malfunctions, the fault indicator  is displayed on the instrument cluster.

Precautions

- While the BSD system provides assistance in monitoring blind spots of rearview mirrors, it cannot replace the driver's observation and judgement. The driver must keep control of vehicle at all times and drive properly and is fully responsible for the vehicle.
- The BSD system may be unable to provide adequate warning on target vehicles approaching from behind at a high speed.
- The driver must ensure the normal operation of the BSD system, keeping its rear corner mmWave radars in good condition. For example, dirt, snow, or other obstructions need to be cleared right away.
- Detection may be affected or delayed in some environments. If the radar cross section of the target vehicle is too small (a bicycle, electric moped, or pedestrian, for example), the system may fail to identify targets and raise false alarms. In addition, detection may also be affected or delayed by noise or electromagnetic interference.
- If unrelated targets at the rear side or in the rear (such as large roadside barriers used during road repair, large billboards by the road, reflectors in tunnels, or other objects with a large reflection cross-sectional area) are wrongly selected as target vehicles, the BSD system will give an alert.
- Targets that may not be responded include, but are not limited to,

Pedestrians, animals, and vehicles travelling in opposite direction.

- Situations where lane lines may not be identified include, but are not limited to: motorcycles, scooters, tricycles, bicycles, and pedestrians.

System Limitations

- Under some circumstances, it is difficult for the system to assist the driver, and detection may be affected or delayed. Possible circumstances include, but are not limited to:
 - The vehicle coming from behind changes the lane suddenly.
 - Vehicles coming from behind are detected too late at sharp turns, slopes, or other settings.
 - The target vehicle is obscured.
 - The radar cross section of the target vehicle (for example, a bicycle or electric moped) is too small.
 - The vehicle is on a curve which is too sharp, or is entering or exiting a curve.
 - The vehicle is running under severe weather, such as rain or snow.
 - Radar coming off, loosely installed, or blocked.
 - The vehicle encounters certain metal guardrails or similar road conditions.
 - Targets that may not be responded include, but are not limited to, pedestrians and animals.
 - The environment contains electromagnetic interference or other influences.
- Vibration or collision influence on sensor calibration of BSD's rear corner mmWave radars can degrade system performance. If this is detected,

contact a BYD authorised dealer or service provider.

WARNING

- BSA serves as driver assistance only, so the driver must be fully responsible for driving safety.
- Influence of weather, road conditions, and other factors may cause the BSD system to fail.
- Use blind spot assist based on your needs, traffic, and road conditions.


Driver Monitoring Systems (DMS)

The Driver Monitoring System (DMS), including fatigue and distraction monitoring, is designed to monitor the driver's driving status with a camera and assess it. Based on the assessment, the system alerts the driver in a timely manner. The monitoring data will not be saved or uploaded to the server but instead will be deleted immediately after the assessment is complete.

How to Use

- The camera for DMS is mounted on the A-pillar of the driver side. Make sure it is unobstructed before use, or DMS may not function normally.



- To enable or disable fatigue or distraction driving warning (both enabled by factory default), go to the infotainment touchscreen →  → **Vehicle** → **Cabin Perception**. By default, the system is switched on each time when the vehicle is powered on.

Fatigue driving warning

- With the vehicle speed meeting the system activation condition, driver fatigue warning enabled and the camera unobstructed, when the system detects signs of fatigue, such as closing eyes, blinking and yawning, it alerts the driver through a visual warning on the instrument cluster, voice assistant, or an audible alarm.

Distraction driving warning

- With the vehicle speed meeting the system activation condition, distraction driving warning enabled, when the system detects signs of distraction, such as not looking at the road ahead, it alerts the driver promptly through a visual warning on the instrument cluster, voice assistant, or an audible alarm.

REMINDER

- Clean the DMS camera lens with a clean and soft cloth and exercise caution to prevent any damage to the surface.

Precautions

- The driver monitoring system is only an auxiliary system and is not capable of effective recognition and alarm-raising in all situations. Make sure to drive safely, observe surrounding traffic conditions, and obey local laws and regulations regarding driving.
- The proper functioning and accuracy of the driver monitoring assistance can


be affected by a number of situations, including but not limited to:

- Driver monitoring assistance is disabled.
- The camera is directly exposed to strong light.
- Part of the driver's face is exposed to light or the complete facial features are hard to recognise.
- The driver wears infrared-blocking glasses or glasses with thick lenses.
- The driver wears a mask or something that covers the face.
- The driver is not properly seated or the driver's face is in the blind spot of the camera.

 **WARNING**

- The driver should pull over as soon as possible when feeling tired.

Direct Tyre Pressure Monitoring System (TPMS)

- The direct Tyre Pressure Monitoring System (TPMS) is an auxiliary system that monitors tyre pressure in real time to improve vehicle safety and comfort and reduce tyre wear and energy consumption due to insufficient tyre pressure.
- You can navigate to the driving information bar by pressing the  button on the steering wheel and to the tyre pressure display screen by pressing the button again.

Tyre pressure system alarm

- When the pressure of any tyre is lower than 80% of the standard tyre

pressure and the system is running, the tyre pressure fault warning light lights up and the tyre pressure value turns yellow. In that case, it is recommended to check for slow air leakage and inflate the tyre to the correct pressure value.

- When the temperature of any tyre is above 85°C for three consecutive minutes, the tyre pressure system gives a high temperature alarm, and the temperature value of the corresponding tyre turns yellow. It is recommended to stop the vehicle and wait for the tyre temperature to decrease before further driving.
- When the system is running, if a fault occurs, the tyre pressure fault warning light is solid on after flashing, and the message "No Signal" or "Please check TPMS" is displayed on the instrument cluster. In that case, check the tyre pressure monitoring module, and check for any surrounding electromagnetic source nearby. If the alarm persists for a long time, contact a BYD authorised dealer or service provider.

 **WARNING**

- The system does not stop vehicle travelling in the event of abnormal tyre pressure. Therefore, each time before driving, check whether the tyre pressure meets the requirements specified by the manufacturer. If not, do not drive, otherwise vehicle damage or personal injuries can occur.
- If pressure is found to be abnormal while driving, check the tyre pressure immediately. If the low pressure warning light comes on, avoid sharp turns or emergency braking, and reduce

! WARNING

vehicle speed, pull it over to the curb and stop as soon as possible. Driving with low tyre pressure can cause permanent damage to tyres and increase the likelihood of tyre scrapping. Serious tyre damage can lead to traffic accidents, resulting in serious injuries or deaths.

! CAUTION

- The running time of the tyre pressure monitoring module is related to the daily travel distance and other factors.
- The monitoring module regularly transmits tyre pressure and other information to the display. Therefore, if the tyre pressure drops suddenly or there is a flat tyre, the monitoring module will not transmit data to the display until the next monitoring. In this case, the vehicle may be out of control. If there is a flat tyre and monitoring fails to inform, or if you feel that there are some tyre problems, stop driving immediately instead of waiting for the display to signal an alarm.
- Incorrectly installed monitoring module affects the air tightness of the tyre. It is recommended that the installation and replacement of the pressure monitoring module be carried out by professional technicians of a BYD authorised dealer or service provider in accordance with the requirements of the installation manual.
- Since tyre pressure varies with regional temperatures, inflate or deflate the tyres according

! CAUTION

to the values displayed on the instrument cluster and the standard tyre pressure values.

- The tyre pressure monitoring system may be disturbed by non-BYD approved electrical accessories on the vehicle. This is not a tyre pressure system failure.
- The tyre pressure system needs to be matched again after replacement of wheel rims or spare tyres* or tyre rotations. Go to a BYD authorised dealer or service provider to re-match the tyre pressure.

Acoustic Vehicle Alerting System (AVAS)

System Function

The acoustic vehicle alerting system (AVAS) refers to the broadcast to pedestrians near the vehicle when it is travelling at low speed.

- When driving forward:
 - The alert volume increases with vehicle speed in the range of 0-12 mph (0-20 km/h).
 - The alert volume decreases with vehicle speed in the range of 12-18 mph (20-30 km/h).
 - At speeds above 19 mph (30 km/h), the broadcast sound stops automatically.
- The vehicle makes a continuous and balanced sound when reversing.

Disabling/Enabling the System

- To turn on or off the engine sound simulator*, slide down from the top of the infotainment touchscreen

to access the shortcut screen (not supported in some regions).

WARNING


- The AVAS pause switch can only be used if there are no other road users within a short distance, and no audio prompt is needed considering the surroundings (for example, in a traffic jam or on the motorway). As long as pedestrians may appear around the vehicle, the AVAS needs to be turned on.
- If the vehicle is running at low speed with AVAS turned off, it is unable to alert pedestrians to the approaching vehicle, which may cause car accidents and even casualties in severe cases.
- If the AVAS prompt sound cannot be heard when driving at a low speed, stop the vehicle in a relatively safe and quiet place, open a window, then drive at a constant speed of 12 mph (20 km/h) in Drive and check whether an audio prompt can be heard from the front of the vehicle. If it is confirmed that there is no sound, it is recommended to contact a BYD authorised dealer or service provider to deal with it.

Around View Monitor (AVM)

- Around View Monitor(AVM) activation method:
 - To access the panoramic view, press the button on the steering wheel.
 - Alternatively, tap the vehicle view App on the infotainment touchscreen to enter the around view.

- Shift into Reverse and the AVM screen is automatically displayed.



- On the bottom of the infotainment touchscreen, tap the icon for front, rear, right, or left view. View of the selected area is displayed in the image section.
 - In the single front and rear views, double-tap the image section to switch to a 180° perspective displayed in full screen.
 - Tap the radar icon  in the AVM system to enable the radar display, and tap it again to disable. When the radar display is enabled, a warning is displayed as the vehicle is approaching an obstacle.
- Transparent body view: Tap the transparent vehicle panoramic view button to switch between transparent and non-transparent vehicle images.
 - After the vehicle starts, the image before last power-off is displayed on the transparent panoramic view screen. Foreign bodies shown may be inconsistent with the actual ones in the underbody and surrounding blind areas. The underbody image update will begin only after the vehicle has started to run and will be complete when the vehicle has been driven beyond its length.
- 3D panoramic view: Tap the 3D panoramic view button (the button lights up) to access this view. Tap

the 3D panoramic view button again (the button turns grey) to access 2D panoramic view.

WARNING

- The panoramic view system provides transparent panoramic view to show the image below the vehicle. This function is only for assisting in observation of area below the vehicle during parking/driving. Investigation of foreign objects below the vehicle and dangerous situations should be carried out in any other manner to ensure the safety of personnel and the vehicle.
- This system uses wide-angle fisheye cameras, so the object on the display screen may appear somewhat deformed in comparison with the actual object.
- The panoramic view system is only to be used for parking/driving assistance. It is not safe to rely solely on this system to park or drive the vehicle, because there are some blind spots in front of and behind the vehicle. The surroundings of the vehicle should be observed in other ways during the parking/driving process, so as to avoid accidents.
- When the side mirrors are not extended in place, do not use the panoramic view system; and when the panoramic view system is used for parking/driving, ensure that all doors are closed.
- The distance to an object displayed on the panoramic view screen may be different from the distance perceived subjectively, especially when the object is closer to the vehicle. Assess the distance in various ways.

WARNING

- Cameras are installed above the front bumper, the lower parts of the side mirrors, and the rear license plate. Make sure the cameras are unobstructed.
- To prevent affecting camera performance, avoid spraying directly on the cameras when washing the vehicle body with high-pressure water. Wipe any water or dust off the camera in time.
- Protect the cameras from any impact to prevent damage or malfunction.
- After the vehicle is powered on, if you press the panoramic view start button or shift into reverse while the infotainment system is not fully activated, the output on the panoramic view screen will be delayed or the screen will flash. This is a normal part of the camera power-on process.
- When the vehicle runs at a low speed, the transparent panoramic view function is affected by speed fluctuation or multiple stops, so there will be misalignment between the images below the vehicle and that outside the vehicle.

Parking Assistance

- During parking, the parking assist system detects obstacles using sensors and alerts the driver to their proximity via an image on the infotainment touchscreen and an audible alarm.
- This system aids in reversing, but always remain aware of the


surroundings behind and around the vehicle during reversing.

- When you shift into Reverse, the infotainment touchscreen will automatically display a reversing image.
- For your driving safety, when the reversing image is displayed, all buttons will be disabled except some volume and calls-related buttons.
- After reversing ends, the interface will be restored.

WARNING

- When the vehicle speed is over 7 mph (10 km/h), the parking assist system will cease to operate.
- Do not place any objects within the sensors' working range.
- To prevent sensor malfunction, do not wash the sensor with water or steam.
- When no camera is available, a "No video signal detected" message is displayed.

Parking Radar Switch

- To turn the parking sensors on or off, go to infotainment touchscreen →  → **ADAS** → **Parking Assist**.
- When the ignition is switched on and the gear is shifted to Reverse, the parking assist system is enabled automatically.
- When the parking assist system is enabled, the vehicle is not in Park, and the EPB and AVH are released, the obstacle detection mode of the parking assist system is enabled. When


Working example of centre sensors

enabled, the system raises an alarm if obstacles are found surrounding the vehicle; when disabled, it does not.

Sensor Type




- When the sensor detects an obstacle, an image is displayed on the infotainment touchscreen according to the location of the obstacle and its distance from the vehicle.
- When the driver conducts parallel parking or reverse parking, the sensor measures the distance between the vehicle and the obstacle and communicates this information through the infotainment touchscreen and the speaker. Be aware of the surroundings when using this system.

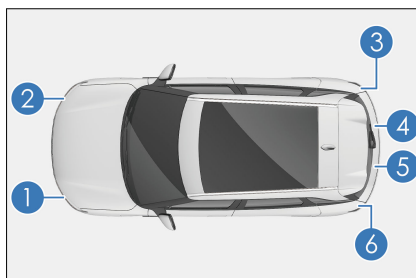- ① Front left corner sensor*
- ② Front right corner sensor*
- ③ Rear right corner sensor
- ④⑤ Rear centre sensors
- ⑥ Rear left corner sensor





Distance Display and Speaker

When the sensor detects an obstacle, the location of the obstacle and its approximate distance from the vehicle are displayed on the infotainment touchscreen, and the speaker beeps.

Approximate Distance (mm)	Touchscreen Display Example	Alarm
About 700 to 1,200		Slow
About 400 to 700		Fast
About 200 to 400		Continuous

Working example of corner sensors

Approximate Distance (mm)	Touchscreen Display Example	Alarm
About 400 to 600		Fast
About 200 to 400		Continuous

CAUTION


- 0~200mm is the blind spot range of the system. For the poor detection accuracy and inaccurate alarm information, the alarm prompts in 0~200mm are for reference only.

Working Sensors and Detection Range


All sensors are activated upon reversing.

The illustration shows the sensors' detection range. Sensors have a range limitation, so drivers must check the surroundings before slowly reversing the vehicle.


Configuration 1

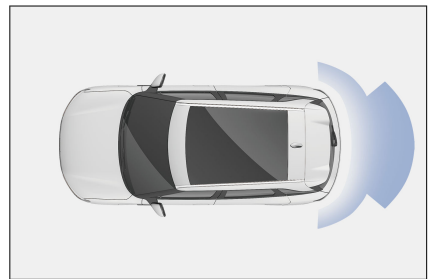

Configuration 2

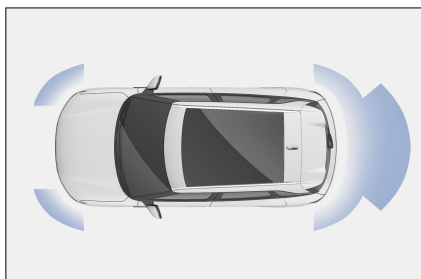

! REMINDER

- The parking assist system is only for assistance, and is not a substitute for personal judgement. Be sure to operate the vehicle based on your observations.
- Sensors will not work properly if accessories or other objects are placed within their detection range.
- In some cases, the system cannot operate properly and will fail to detect certain objects as the vehicle approaches them. Therefore, be sure to observe the vehicle's surroundings at all times. Do not rely solely upon the system.
- Failure of the reversing radar system  * is indicated by a message on the instrument cluster and a beep, contact a BYD authorised dealer or service provider for inspection as soon as possible in the event of the error message.

Sensor detection information

- Certain vehicle conditions and surroundings may affect the sensors' ability to accurately detect obstacles. Detection accuracy may be affected if:

- There is dirt, water or fog on the sensor.
- There is snow or frost on the sensor.
- The sensor is masked in any way.
- The vehicle leans significantly to one side or is overloaded.
- The vehicle is moving on particularly bumpy roads, slopes, gravel or grass.
- The sensor has been repainted.
- The vicinity is noisy due to honking of vehicles, motorcycle engines, air brakes of large vehicles, or other noises that produce ultrasonic waves.
- There's another vehicle with parking assist system nearby.
- The vehicle is fitted with a tow eye.
- The bumper or the sensor was hit hard.
- The vehicle is approaching a high or zigzag kerb.
- The vehicle is driving in the sun or in the cold.
- The vehicle is fitted with non-original suspension that is lower than the original one.
- Except as described above, sensors may not be able to correctly determine the actual distance due to the shape of the object.
- The shape and material of obstacles may prevent sensors from detecting them, especially the following:
 - Electric wires, fences, and ropes
 - Cotton, snow, and other materials that absorb radio waves
 - Any object with sharp edges and corners
 - Low obstacles

- High obstacles facing outwards towards the vehicle
- Any object under the bumper
- Any object close to the vehicle
- Persons near the vehicle (depending on the type of clothing)
- If an image is displayed on the infotainment touchscreen* or there is a beep, it may be that the sensor detects an obstacle or is interfered. If the issue persists, go to a BYD authorised dealer or service provider for inspection.



CAUTION

- To prevent sensor malfunction, do not wash the sensor area with water or steam.

Driving Safety Systems

For better driving safety, the following driving safety systems works automatically based on driving conditions. However, these systems only provide assistance, and excessive reliance on them is not recommended.

Intelligent Power Braking System

- The intelligent power braking system is an advanced decoupled electro-hydraulic brake system, incorporating vacuum booster, electronic vacuum pump, ABS /ESC system and other features.
- The system assists vehicle braking according to the driver's demands and improves vehicle stability, comfort, and the recovery efficiency of brake energy.

Vehicle dynamics control (VDC)

When the vehicle turns suddenly while driving, if the vehicle swerves from the

driver's normal lane, the VDC will correct the situation by engaging brakes to the corresponding wheels to help the driver control skidding and maintain directional stability.

Traction control system (TCS)

TCS prevents the drive wheels from skidding during acceleration by reducing the motor power, and, when necessary, applies braking forces to prevent drive wheels from spinning. It makes it easy for the vehicle to start, accelerate, and climb under adverse driving conditions.



WARNING

- TCS may not work effectively in the following situations:
 - On slippery roads, even if TCS is working properly, it may not be able to control the direction and meet power requirements.
 - Do not drive in conditions where the vehicle may lose its stability and power.

Hill hold control (HHC)

After the brake pedal is released, HHC maintains brake pressure for one second to prevent backward sliding.

Hydraulic brake assist (HBA)

When the brake pedal is pressed quickly, HBA recognises that the vehicle is in emergency mode and actively improves the brake pressure. This allows ABS to intervene more quickly, effectively shortening the brake distance.

Controlled deceleration for parking brake (CDP)



When you engage the EPB, the CDP function starts working so that the vehicle brakes at a constant deceleration (0.4 g if EPB is engaged but the brake pedal is not pressed, and 0.8 g if EPB is engaged

and the brake pedal is pressed) until the vehicle stops. The function stops working when the EPB is released.

Hill descent control (HDC)


- Working principle: HDC is a value-added function of the ESC system to improve vehicle comfort. The main function of HDC is to assist in downhill slow driving through active braking. When HDC is working, ABS is activated when the wheel slip exceeds the ABS triggering threshold, allowing you to safely and smoothly go downhill, or even reverse.
- To enable or disable HDC:
 - When the speed is below 23 mph (38 km/h), you can also enable HDC by pressing the HDC switch. When the function is enabled, its status indicator on the instrument cluster is steady on.
 - Press the HDC switch again to disable the function, and the indicator on the instrument cluster turns off. HDC also automatically stops when the speed exceeds about 40 mph (65 km/h).
- HDC speed control:
 - HDC works at speeds between 7 mph and 23 mph (11-38 km/h), within which you can adjust the speed by pressing/releasing the accelerator or brake pedal. The vehicle speed is set when the accelerator or brake pedal is released. The HDC status indicator flashes to indicate that the HDC is working.
- HDC malfunction:
 - In some special conditions, such as at a long stretch of downhill, the HDC function may be temporarily unavailable due to high brake temperature.

Intelligent power braking system has the following new functions compared with the original ESC system:

- Brake assist mode
 - The brake assist mode is used to adjust the brake pedal feel. The relation curve between the brake pedal depth and the vehicle deceleration varies across different modes for the driver to choose their preferred pedal feel.
 - To set the brake assist mode, go to the infotainment touchscreen →  → **Vehicle** → **Driving Control** → **Brake Assist Mode**, and select **Comfort** or **Sport**.
- Comfort parking
 - Comfort parking function: When the vehicle decelerates to stop in a non-emergency situation, the intelligent power braking system reduces the stop-instant suspension pitch and impact by controlling the brake pressure of the four brakes, providing a smooth stop feeling for the driver.
 - To enable or disable this function, go to the infotainment touchscreen →  → **Vehicle** → **Driving Control** → **Comfort Parking**.
 - After the function is triggered, the braking distance may increase by 2-5 cm. Increase the distance from the vehicle or obstacle ahead accordingly before stopping your vehicle.
- Brake disc wiping
 - Brake disc wiping function: When the wiper switch is on, the intelligent power braking system applies a small brake pressure to all four brakes so that pads come into contact with discs to remove the water film from the discs. This shortens brake response time and braking distance.

- As long as the system detects rain or the wiper ON signal, the brake discs are repeatedly wiped at certain intervals to improve safety.


ESC operation instructions


- ESC working
 - If there is a risk of skidding or backsliding when the vehicle starts on a slope, or if either drive wheel is spinning, the ESC indicator flashes to indicate that ESC system is working.
 - Disabling ESC
 - If the vehicle gets stuck in snow or mud, ESC may reduce power output from the motor to the wheels, where the system should be turned off to get out of the jam.
 - Turning off ESC
 - To turn off the ESC system, press the physical button or go to the infotainment system. ESC also checks its operating status in real time. If the ESC OFF switch is pressed while ESC is working, it completes the active intervention control this time rather than executes the "OFF" command immediately. ESC is disabled only after the intervention control is complete.
 - Some ESC functions may be re-enabled if you press the ESC OFF switch again or the vehicle speed exceeds the threshold of 50 mph (80 km/h). ESC may be re-enabled only if the ESC is not in a vehicle dynamic intervention state.
 - ESC OFF switch mis-operation*
 - ESC is considered to be mis-operated if the ESC OFF switch is pressed and held for more than 10 seconds. In that case, all internal ESC functions continue to work.
 - Restarting ESC after the motor is powered off
 - When the ESC system has been turned off, restarting the motor will automatically restart ESC system.
 - ESC start and speed linkage
 - Although already turned off, the ESC system can start on its own if the vehicle becomes extremely unstable as the speed increases and exceeds the threshold of 50 mph (80 km/h).
 - With ESC system activated
 - If the ESC fault indicator  flashes, drive with caution.
 - With ESC system disabled
 - Be careful when ESC is disabled, and drive at speeds suitable for road conditions. The ESC system ensures vehicle stability and its driving force. Never turn it off unless necessary.
 - Replacing tyres
 - Make sure all tyres are of the same size, brand, tread pattern, and total load. In addition, be sure to inflate tyres to the recommended pressure.
 - Neither ABS nor ESC will work properly if the vehicle is fitted with different tyres.
 - For details on tyre or wheel replacement, it is recommended to contact a BYD authorised dealer or service provider.
 - Tyre and suspension handling
 - The use of any defective tyre or modified suspension affects the driving safety system and may cause the system to fail.
- Multi-collision braking (MCB)***
- If an accident requires airbags activation, the vehicle engages automatic braking.

- Speed reduction, along with intervention by additional driving systems (ESC and ABS), assists the vehicle to maintain stability and lane position.
- Hazard and brake lights also light up to alert oncoming traffic and prevent further collisions.
- To support emergency service rescue and vehicle recovery, brakes will release and brake lights will go off after the accident.
- The driver can interrupt the multi-collision braking at any time by accelerating or braking.

Anti-lock Braking System (ABS)

- The ABS hydraulic system has two separate circuits. Each circuit runs diagonally through the vehicle (the left front wheel brake is connected to the right rear wheel brake). If one circuit fails, two wheels can still be braked.
- ABS helps maintain steering control by preventing the wheels from locking or skidding when brake is engaged suddenly or on slippery roads.

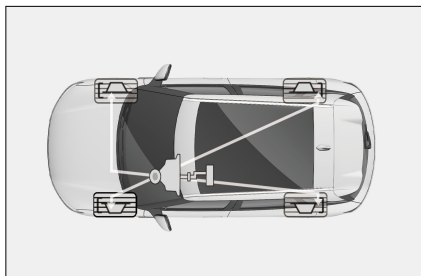

- When the ABS is working, the ESC indicator  will flash and the brake pedal will vibrate, which may produce noise. This is because the ABS is pulsating the brake quickly, which is normal. In this situation, you should press and hold the brake pedal instead

of pumping the brakes. This allows ABS to function as designed. While steering away from danger, a firm and steady pressure should always be maintained on the brake pedal for the ABS to work.

WARNING

- ABS cannot work effectively under the following conditions:
 - Tyres with inadequate grip are used (for example, excessively worn tyres used on snow-covered roads).
 - The vehicle skids when driving at a high speed on slippery roads.
- ABS is not designed to reduce the braking distance of the vehicle. Always keep a safe distance from the vehicle ahead on:
 - Driving on slippery, muddy, sandy or snowy roads.
 - Driving on roads with multiple potholes or on uneven roads.
 - Driving on bumpy roads.

CAUTION

- If the ABS fault warning light is still on while the braking system warning light is on, immediately park the vehicle in a safe place. It is recommended to contact a BYD authorised dealer or service provider.
- In this case, if brakes are applied, the ABS will not work and the vehicle will become extremely unstable.
- ABS does not reduce the time and distance required to stop the vehicle. This system only helps you control steering when



CAUTION

braking. Always keep a safe distance from other vehicles.

- ABS cannot prevent skidding caused by sudden direction change, such as trying to make a sharp turn or change lanes suddenly. Always drive carefully at a safe speed, regardless of road and weather conditions.
- ABS does not prevent decrease in stability either. When applying the brake in an emergency, the steering should be moderate. A large or sharp turn during the driving can cause the vehicle to swerve into oncoming traffic or run off the road.
- When driving on wet or soft or uneven roads (such as waterlogged concrete roads, waterlogged epoxy painted roads, sandy roads, snowy roads), vehicles equipped with ABS may require longer braking distances than vehicles without ABS. In such cases, reduce the vehicle speed and keep a greater distance from other vehicles.

05

IN-VEHICLE DEVICES

Infotainment System.....	142
A/C System.....	146
BYD App*	151
Storage.....	152
Other Devices.....	153


Infotainment System

Infotainment Touchscreen


When the ignition is on, the initial screen is displayed for several seconds and the infotainment system starts to work. To better experience infotainment functions, such as intelligent voice control, apps and video call, the system must be used after network connection.

A warning is displayed when the infotainment system starts for the first time. Tap **Agree** to enter the system.

- ① Infotainment touchscreen
- ② Scroll button

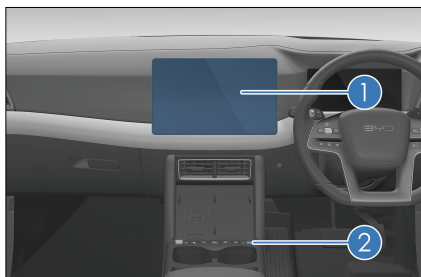

Factory reset

- The infotainment system can be reset to the factory settings by tapping  → **System** → **Version** → **Factory Reset** → **Reset**.
- This function factory resets the infotainment system.
 - During the process, do not touch any infotainment button or turn off the power supply, or errors may occur.
 - The process takes two to five minutes, please wait patiently.


WARNING


- Do not use a high-power inverter in the vehicle, as this may cause infotainment system malfunction.
- Do not format or root the device, as this may cause infotainment system or vehicle malfunction.

CAUTION


- To prevent damage to the touchscreen:
 - Touch the screen gently. If there is no response, remove fingers from the screen, then touch it again.
 - Clean the screen with a soft cloth. Do not use any cleaning product.
- Using the touchscreen
 - When the screen temperature is low, the image displayed may be darker or the system may work slightly slower than normal.
 - The screen may be dark or difficult to see when you are wearing sunglasses. In that case, change the viewing angle or take off the sunglasses.
 - Touchscreen buttons that are greyed out cannot be operated.
- The touchscreen interface shown here is for reference only.
- To better experience infotainment functions, such as intelligent voice control, apps and video call, the system must be used after network connection.
- It is recommended to contact a BYD authorised dealer or service provider in the event of a failure.


Navigation Bar

 : returns to the previous page or exits the program.

 : returns to the homepage.

 : goes to vehicle setting screen.

 : goes to the A/C screen.

 : splits screen if applications support.

 : enables screen saver.



REMINDER


- The shortcut menu on your vehicle may be different.

Gestures and Responses

Gestures and associated system responses are:

- Tapping: opens applications, selects functions, clicks icons on the touchscreen, or types characters.
- Dragging: touching and dragging an icon, thumbnail, or preview to the target position to change its location.
- Swiping: operational on homepage and app screens.
- Double-tapping: zooms in an image. Double-tap again to return.
- Spreading/Pinching: zooms in or out an image with two fingers.
- Swiping down from the top of the touchscreen: opens the shortcut menu.

OTA Upgrade*

- The vehicle supports over-the-air (OTA) updates. You can update your software to the latest by tapping  → **System** → **Version** → **Version update**.
- When available, new updates are prompted on the infotainment touchscreen. You can update immediately when the new version is available or schedule an update based on your vehicle usage.





CAUTION

- Do not move the vehicle during the update.
- Before the update, ensure that the vehicle is parked safely in Park gear with a stable network connection.
- Ensure the vehicle has a high SOC before starting the update.
- Do not install any third-party devices in the OBD port before or during the update.
- Make sure the vehicle has enough battery power before the update, as it cannot be charged or discharged during the process.
- During the update, vehicle functions are not available except the following: locking/unlocking with smart key or microswitch, interior lights, hazard warning light, and window controls.
- If the update fails, try again. If the retry fails, contact BYD customer service or a BYD authorised dealer or service provider for assistance.

BYD Assistant

BYD Assistant is an intelligent voice assistant that responds to your voice commands, such as requesting navigation, playing music/radio, making a phone call, and controlling in-vehicle devices.

- Waking up BYD Assistant:
 - On the steering wheel, press the  button.
 - On the infotainment touchscreen, tap .
 - Say the wake-up word: "Hi, BYD."
- After system wake-up, give voice commands according to tips on the infotainment touchscreen.

Bluetooth call



Bluetooth connection

1. On Bluetooth Call screen, tap **Please connect Bluetooth** to establish connection.
2. Tap **Scan for device** to search for available devices.
3. Pair the available device, and make sure the pairing code displayed on your phone is consistent with the code on the touchscreen.
4. Set Bluetooth when connection is complete.

Bluetooth call

Go to the dialing screen when Bluetooth is connected.

- Tap **Contacts**, **Call log**, and **Missed calls**, or use dial keypad to make a call.

- Tap  to zoom in or out the dialing screen.
- Tap  to display or hide the dial keypad.
- In panoramic view screen, a small window pops up to inform driver of a call.

File Management

New folder

- Go to file management screen to create new folders. You can enter the folder name, and tap **OK** or **Cancel** to perform actions.
- Tap the top of the file management screen to change file sources.

Search

- Tap **Search** on the upper left corner and enter file names to search for target files.

Cut/Copy

- Touch and hold any file, select target files and operation (Copy, Move and Delete), and then go to the edit status.

Rename

- Touch and hold any file, select **Rename** in dialog displayed, rename the selected file, and then tap **OK**.

Delete

- Tap and hold any file and then tap **Delete**.

Sort

- Files are sorted by name by default. You can also sort them by size, type, or time.

Attributes

- Touch and hold any file, select a file, and then tap **Details** to check its attributes.

Phone Projection*

Phone projection* allows you to connect a smartphone to the vehicle and interact with certain mobile apps on the infotainment touchscreen.






WARNING

- Drive safely. Avoid any possible distractions, or accidents could result.


REMINDER

- Make sure the vehicle is in Park with the infotainment system turned on, and allow time to set up the phone projection app before you start your drive.
- The initial setup process must be completed on the phone: check prompts on the phone for security information, accept privacy policies, and grant necessary permissions.
- The first time you connect wirelessly, you will need to pair your phone and the vehicle via Bluetooth. For best results, keep your phone's Bluetooth, Wi-Fi, and Location Services turned on while you complete the setup.
- Ensure your phone is in range of your mobile data network and has an active data plan.
- Availability of services whose names or logos are shown varies by country and language, and subscriptions for services may be required.





Apple CarPlay

- Connecting with a cable
 - Plug an iPhone to a USB data transfer port on the vehicle with a certified USB cable. Apple CarPlay is then connected.
- Connecting wirelessly
 1. Go to the infotainment touchscreen → application screen, tap the Apple CarPlay icon , and pair your iPhone to the vehicle as prompted.
 2. After that, follow on-screen instructions to connect Apple CarPlay.
- Switching between Apple CarPlay and in-vehicle infotainment system
 - To exit Apple CarPlay user interface, tap the BYD icon  on this interface, or  or  in the shortcut bar.
 - To access the Apple CarPlay user interface, tap the Apple CarPlay icon  on the infotainment system's application screen.
- For available regions of Apple CarPlay, visit <https://www.apple.com/ios/feature-availability/#apple-carplay>.

Android Auto

- Connecting with a cable
 1. Plug a smartphone to a USB data transfer port on the vehicle with a certified USB cable.
 2. Follow the on-screen instructions to set up Android Auto.
- Connecting wirelessly
 1. Go to infotainment touchscreen → application screen, tap the Android Auto icon , and pair your smartphone to the vehicle as prompted.

2. After that, follow on-screen instructions to connect Android Auto.

- Switching between Android Auto and in-vehicle infotainment system
 - To exit Android Auto user interface, tap  on this interface, or  or  in the shortcut bar.
 - To access Android Auto user interface, tap the Android Auto icon  on the infotainment system's application screen.
- To use Android Auto on the infotainment touchscreen, you need a compatible Android smartphone. You can check the list of compatible smartphones at g.co/androidauto/requirements.

REMINDER

- Android Auto is integrated into phones with Android 10 and above. You do not need to download it.
- For wired or wireless connection, your phone might ask you to

REMINDER

update Android Auto before you continue.

Trademark statement

- Apple CarPlay is a trademark of Apple Inc.
- Android and Android Auto are trademarks of Google LLC.

A/C System

A/C Panel

Front A/C Panel

- Front windscreen defroster



A/C Operation Interface



- | | | | |
|---|---------------------------|----|---|
| 1 | Seat Operation Interface* | 9 | Defroster for rear window & side mirrors* |
| 2 | A/C operation interface | 10 | Front windscreen defroster |
| 3 | A/C setting | 11 | Max cooling |
| 4 | A/C ON/OFF | 12 | Driver's temperature control |
| 5 | Auto mode | 13 | Air distribution |
| 6 | Ventilation | 14 | Fan speed control |
| 7 | A/C button | 15 | Front passenger's temperature control |
| 8 | Circulation mode | | |

Function Definition

A/C ON/OFF

- Tap this button to disable the A/C if it is ON.
- Tap this button to enable the A/C if it is OFF.

Auto mode

- Tap the auto button, its indicator lights up on the front A/C panel and the auto mode is activated with the fan speed and air distribution being adjusted automatically.
- The vehicle exits auto control if fan speed or air distribution is set, and other functions remain in auto mode except for those that have been operated.

A/C (cooling/heating)

- Tap this button to turn on the A/C (cooling/heating). The icon lights up and cooling or heating begins. Tap this button again to turn off the A/C compressor. The icon goes out and the compressor stops working.

Max cooling

- Tap this button to switch the A/C to the maximum cooling control mode. The compressor is turned on, the temperature is set to "Lo", the fan speed is set to the maximum, the recirculation mode is activated, and air is directed to face level. Tap this button again to enter AUTO mode.

Front windscreen defroster

- Tap this button to enter the front windscreen defrost mode, distributing air to the front windscreen. The corresponding indicator on the front A/C panel lights up.
- Tap this button again to deactivate and exit the front windscreen defroster control mode. The corresponding indicator on the front A/C panel turns off.

Defroster for rear window & side mirrors*

- Tap this button, the electric heating elements inside the rear window and side mirrors will make the window and mirrors clear. The function is automatically deactivated after 15-minute inactivity of the associated button.
- Tap this button again to disable the function.
- This function is not to be used to dry raindrops or melt snow.

WARNING

- Do not touch the side mirrors when the defroster is activated, because their surfaces will be hot.
- When cleaning the inside of the rear windscreen, do not scratch or damage electric heating wires or junctions.

Ventilation

- Tap this button to activate A/C ventilation control. The outlet air is natural air, and the fan speed is 1 by default without cooling or heating.
- Tap this button again to exit.



Temperature controls

- Tap the upside arrow or slide it down to increase the temperature. Tap the downside arrow or slide it up to lower the temperature.
- "Lo"/"Hi" is displayed when the temperature is set to the lowest/highest value.

Fan speed control

Tap the suitable blower speed level button to set the blower speed at a desired level. A higher blower speed level indicates a higher air volume.

Circulation mode

- Tap this button and then  is displayed, indicating that the circulation mode is recirculation.
- Tap this button for the second time and then  is displayed, indicating that the circulation mode is fresh air mode.


Air distribution

- A/C blowing mode

- Tap the corresponding icon on the infotainment system to select the corresponding blowing mode.
- You can turn on multiple air distribution modes at a time (up to three).
- Adjustments can be made according to the air supply illustration.

Blowing face ➔ : Air flows to the face level.

Blowing legs ↓ : Air flows to the leg level.

Defrost  : Air flows to the front windscreen and side windows.

Intelligent A/C ON Method

Remote activation with smart key

- You can turn on the A/C through the remote control key to gain a comfortable interior environment in advance.

Voice control

- Control the A/C settings by pressing the voice button on the steering wheel or by saying "Hi, BYD".

Cloud service activation

- You can turn on the A/C remotely through the BYD App to gain a comfortable interior environment in advance.

Usage Precautions

- To quickly cool down the interior after long exposure to sunlight, drive for a few minutes with the windows open to exhaust hot air and speed up A/C cooling.
- To speed up cooling, adjust the temperature to "Lo" and use the recirculation mode for a few minutes.
- Make sure that the air intake grille in front of the windscreen is not blocked by, for example, leaves or snow.
- Avoid blowing cool air onto the windscreen in humid weather. The inner and outer temperature difference can cause glass fogging.
- Keep the space under the front seats clear to improve air circulation.
- In cold weather, run the fan at high speed for one minute to remove snow or moisture from the intake passage and reduce fogging.
- Use recirculation mode for a few minutes for quick heating in cold weather, and switch to fresh air mode to prevent fogging after the cabin is heated up.
- In dusty or windy driving conditions, close all windows, switch on the recirculation mode, and turn on the A/C.
- In heating mode, press the compressor control button to light up the button (turning on the compressor), which can reduce airflow moisture.
- In the ventilation mode, the system introduces the natural wind from the outside, which is suitable for spring and autumn.

REMINDER

- A/C odour:
 - It is normal that there may be a damp and moldy smell just after the A/C is turned on. During the operation of the automobile A/C, A/C condensation often remains in the evaporator, and the wet evaporator can easily absorb unfiltered body sweat, smokes, etc., inside the vehicle. Condensation not blown dry

! REMINDER

makes the dark and damp evaporator surface prone to mold, which is very likely to produce unpleasant odours by long-term fermentation.

- How to prevent A/C odours:
 - Turn off the A/C and ventilate with natural air before parking to keep the air inside the vehicle relatively dry.
 - Inspect, clean, or replace the filter regularly.
 - Try to keep the cabin clean and fresh.
- If the odour persists after odour prevention methods are used, it is recommended to contact a BYD authorised dealer or service provider for repair.
- In order to reduce odours from the A/C, if the A/C is already turned on, the A/C blower may keep running for a while after the vehicle is powered off and locked. That is because the condensed water on the surface of the evaporator needs to be dried to prevent mold fermentation. It is normal for the A/C blower to start running automatically when you lock the vehicle. No need to worry about it.

A/C Settings

To access the A/C setting interface, go to the infotainment touchscreen → **A/C**.


- A/C auto mode
 - Two options are available: Economic and Comfort.
- Remote controlled A/C running time

- Set the time for remote A/C running.
- Auto Internal Circulation upon Parking*
 - Tap this button to enable this setting.
 - Tap this button a second time to disable it.
- Auto Internal Circulation in Tunnel*
 - Tap this button to enable this setting.
 - Tap this button a second time to disable it
- Auto fan speed reduction during Bluetooth calls
 - Tap this button to enable this setting.
 - Tap this button a second time to disable it.


A/C Vents

- Toggle the slat up or down to adjust the outlet angle of air flow.
- Slide the slat left or right to adjust the outlet angle of air flow or open/close the vent.


Front Center Vent

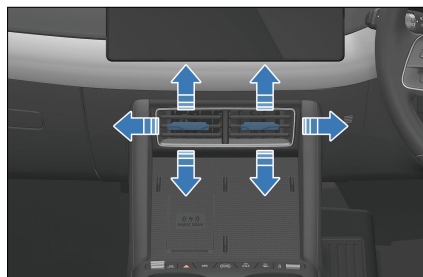

Front Side Vents

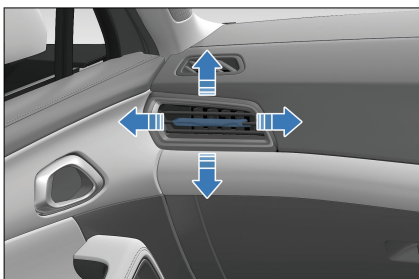

Rear vents

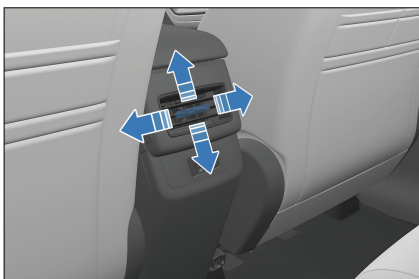

BYD App*

About BYD App*

- BYD app is a mobile application of Internet of Vehicle (IoV) independently developed by BYD. It allows you to control the vehicle remotely and check vehicle conditions, delivering cloud era experience of IoV.
- You can search for "BYD" in application markets such as Google Play and App Store to download and install BYD app.

Account Registration*

Once the app is installed, follow the on-screen instructions or the steps below to sign up and log in.

1. Open the app, and then tap **Sign up** to go to the registration screen.

2. Enter email address registered in BYD authorised dealer, tap **Send email** to receive verification code, and then enter the code in the app.
3. Set your password in password setting screen to complete the registration, and then the homepage is displayed.

CAUTION

- Provide the email address registered at the BYD authorised dealer, or registration will fail.
- In the app, select a country or region on upper right corner of the screen. The default setting depends on your phone setting. If it is not where you make the purchase, choose the right one, otherwise your data will not be accessible.

Vehicle Condition and Control*

The BYD app homepage provides information and control items of the vehicle.

- The homepage shows remaining driving range, SOC, vehicle error information, and status of vehicle driving, charging, A/C system, doors and windows, seat heater and ventilator, and tyre pressure.
- Tap the lock, unlock, light flashing and honking, or light flashing button to activate the corresponding function.
- Turn on or off A/C on the app homepage, or tap the A/C card to perform other settings.
- At the bottom of the homepage, tap the icon of seats, doors and windows, or tyres to go to the associated screen and check their status.

- If you have multiple vehicles on an account, tap the vehicle name in the upper left corner of the screen to switch between vehicles.

CAUTION

- The control function of the app is mainly for remote use. To use this function, ensure your phone and vehicle are connected to the Internet.

Individual Center and Vehicle Management*

In BYD App screen, tap My Account to go to the individual centre.

- Tap the icon on the top right corner of the vehicle card to edit the vehicle name and license plate number.
- Account and Security: recovers or changes your password.
- Settings: sets message reception, automatic login, and other items.
- About: includes privacy policy and information to contact us and give feedback.

Storage


Door Bins

- There is a door bin on each door for storage of beverage bottles or small items.



Glove Box

- Tap the lid to open the bill box.
- Push the lid up to close it.

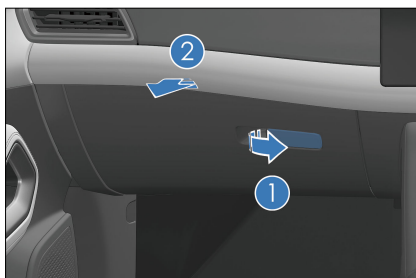

REMINDER

- To reduce risk of injury in the event of an accident or emergency braking, keep the glove box closed while driving.

Center Console Cubby

- Pull up the lid of the centre console cubby in the direction shown in the illustration to open it.
- Snap down the lid to close it.



! REMINDER

- To reduce risk of injury in the event of an accident or emergency braking, keep the centre console cubby closed while driving.

Seatback Pockets

- There are seatback pockets at the back of the front seats for storing magazines, newspapers, or similar objects.



Cup Holders

Front Seat Cup Holders

- The front seat cup holder is located inside the centre console cubby.




Other Devices

Sun Visor

① Sun visor

- To block sunlight from the front, pull the sun visor down.
- To block sunlight from a side, remove the swivel sleeve from the fixed support and turn the visor towards the side window.

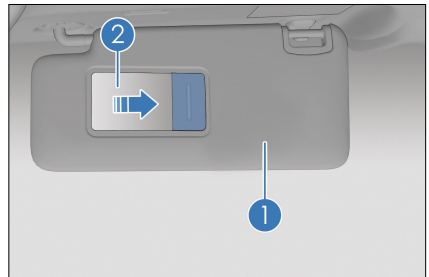

② Vanity mirror


- Flip down the sun visor and slide the mirror cover for use.

! REMINDER

- Correct use of the sun visor improves driving safety and comfort.

Grab Handles

- Pull the grab handle down for use. The handle returns to its original position when released.

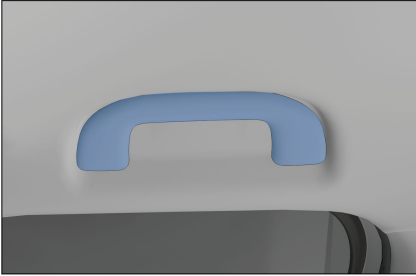

CAUTION

- Do not hang any heavy objects from the grab handles.

USB Ports

Front-row USB ports

- The infotainment system is compatible with USB storage devices up to 128GB. It is not compatible with all USB devices on the market.
- It is recommended to use USB storage devices up to 128GB with FAT32 format.

CAUTION

- Do not use substandard or special USB storage devices to avoid damaging the infotainment system or data in the USB device.
- For this infotainment system, TF cards (also called Micro-SD cards), can be used with a capacity of up to 128GB.
- Basic requirements for TF card: class10 and above, FAT32 partition format.

- Incompatible cards may result in recorder failure to write and save video files.
- There are two ports installed in the lower layer of the auxiliary console.

- ① USB data port
- ② Type-C charge port (charging only)

- The power outlet can be used only when the ignition is on.




Rear-row USB ports

- The rear USB ports are located behind the centre console cubby

- ①② Type-C charge port


- The power outlet can be used only when the ignition is on.

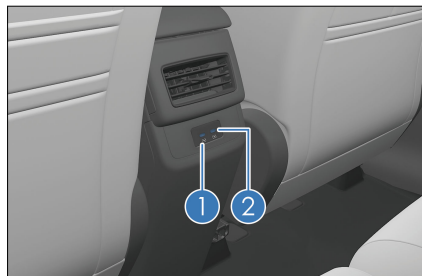

SD Card Slot

- The lower layer of the auxiliary dashboard is equipped with a dedicated SD card slot.

- The infotainment system supports TF card (also called Micro-SD card) ranging from 32 to 128GB with a Class 10 speed rating or higher and FAT32 format.

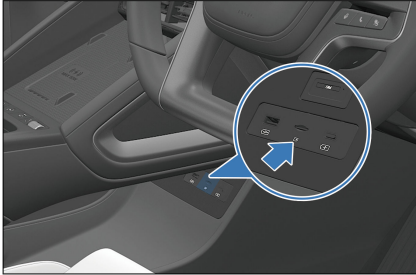


! CAUTION

- Insert the card correctly.
- When the card is inserted, a red flashing dot on the driving recorder's interface* indicates successful recognition and normal operation. Any issue with card recognition or video recording prompts corresponding notifications on the infotainment touchscreen.
- Incompatible TF cards may result in failure to write and save files.
- It is recommended to use a USB storage device with a partition format of FAT32 and a memory of 32G.
- Format non-FAT32 cards before using them, or the system may fail to recognize them.
- Before removing the TF card, stop recording or shut down the infotainment system, or video files may be damaged.

12 V Auxiliary Power

- The standby power supply can be used for accessories with a working current of less than 10 A and electrical power of less than 120 W.
- The 12 V auxiliary power supplies power to vehicle accessories.
- The 12 V auxiliary power is available only when the ignition is on. Lift the cover to use it.

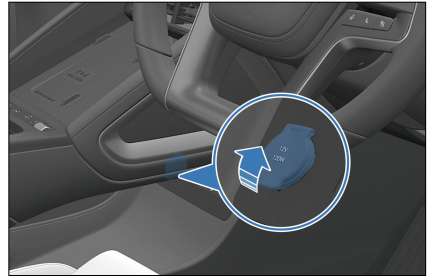

Wireless Phone Charger*

- The mobile phone wireless charging area is located on the centre console. To activate/deactivate wireless charging, tap the wireless charging icon on the shortcut page after sliding down the top status bar on the infotainment touchscreen.
- After starting the vehicle, put the phone in the wireless charging area with the phone screen facing up. The phone automatically begins wireless charging, and a charging icon is displayed on the infotainment touchscreen.



- Wireless phone charging uses a coil to transmit electrical energy to a phone battery through electromagnetic wave induction so that the phone can be charged without a cable connection.

! CAUTION

- To use the vehicle wireless charger, your phone must have wireless charging function.
- Ensure your smart key is more than 10 in. (25 cm) away from the wireless charger area when the wireless charger system is working.
- To avoid wireless charger dysfunction or even accidents, do not place coins, metal keys, metal rings, or other articles containing metal (for example, the metal phone case) in the wireless charger area together with the phone.
- To avoid damage to the charger area, do not place heavy objects on it.
- If the phone wireless charger system is faulty and does not work properly, it is recommended to contact a BYD authorised dealer or service provider.
- BYD will not assume any responsibility for any problems caused by improper use. If

! CAUTION

the product is disassembled or modified, the free warranty will be terminated.

- For safety reasons, do not leave an unattended phone being charged in the vehicle.
- For safety reasons, refrain from checking phone charging status while driving.
- If a metal item is found between the device and the charger during charging, remove the mobile phone immediately and wait for the metal item to cool down before removing to prevent burning.
- While charging, align the bottom of the phone with the vents of the wireless charging area to ensure a better charging experience.
- Prevent any fluid from coming into contact with the charger area. The wireless charger will malfunction if water enters the wireless charger.
- Do not use flammable solvents such as oil, grease, or alcohol to clean the wireless charging area.
- Do not cover the wireless charging area with fabrics or objects while charging.
- Charging may stop at high temperatures, and will resume once the temperature drops.
- BYD makes no commitments for problems caused by external wireless charging coils (for example, magnetic charging coils). Please use with caution.
- To avoid burning cards with chips, such as NFC cards and bank cards,



CAUTION

do not place them between the wireless charging area and the phone during charging.

- Before charging, placing an NFC-enabled phone on the NFC-integrated wireless charging area may activate the phone's digital wallet.
- When the ignition is switched on, activating the digital key will pause the phone's wireless charging. The wireless charging automatically resumes when activation is finished.



REMINDER

- Only one phone can be charged at a time.
- A phone case that is too thick may prevent charging.
- On bumpy roads, the wireless phone charging may intermittently stop and then resume.
- Try to ensure that the surface on which a mobile phone is placed is parallel to the charging module. If the phone moves from the wireless charger area and stops charging, move it back.
- If the phone cannot be charged properly, ensure that there are no foreign objects in the wireless charger area, or wait for the wireless charger area to cool down before trying again. If it is still impossible to charge the phone, contact a BYD authorised dealer or service provider.
- After power-off, if the phone is still charging and a front door is opened, the message "Please take




REMINDER

your cell phone with you" is on the instrument cluster.

- The setting icon for wireless phone charging can be added or removed on the shortcut page of the infotainment touchscreen.
- For the purpose of compatibility, the in-vehicle wireless fast charging* module may be slower than the original charger provided by your phone's manufacturer.
- The wireless fast charging* power of your phone depends on that supported by the phone, while the in-vehicle fast charging* only supports up to 50 W.
- Certain phones may carry outdated charging programs that are not capable of fast charging*.

Cargo Cover*

- The cargo cover is used for privacy and direct sunlight protection.
- Snap the two grooved sides ① of the cargo cover into the lower C-pillar shield bosses on both sides, and then attach the cover drawstring ②.
- Do the reverse to remove the cover.

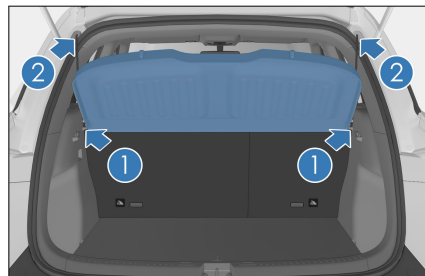



WARNING

- When installing the cargo cover, make sure that it is installed securely.
- Do not place any objects on the cargo cover.
- Never allow a child to climb onto the cargo cover, otherwise, damage to the cargo cover, or even injury/death to the child, can happen.

06

MAINTENANCE

Maintenance Precautions.....	160
Regular Maintenance.....	162
Self-Maintenance.....	167

Maintenance Precautions

Maintenance Cycle and Items

Maintenance Plan

- The maintenance plan is designed to ensure stable driving, failure reduction, safe and economical driving.
- The maintenance schedule lists all the necessary items to keep the vehicle in optimum condition at all times.
- The items in the maintenance schedule are important and need to be maintained according to the time interval.
- Hoses with any degradation or damage should be replaced immediately. Rubber hoses (for systems such as A/C, heating, and braking systems) must be checked by professional technicians according to the maintenance schedule.

Maintenance Schedule Requirements

The vehicle must be maintained according to the regular maintenance schedule.

If the vehicle is operated primarily under one or more of the following special conditions, certain maintenance items may need to be performed more frequently.

- Road conditions
 - Muddy, sandy, or snowy roads.
 - Dusty roads
- Driving conditions
 - Use of towed trailer, camping trailer, or roof rack
 - Within 5 miles (8 km), repeated short distances are driven and the outside temperature is below freezing.
 - Long idling and/or long distance driving at low speed, for example, using the vehicle as a police car, taxis or using it for transporting goods.

Maintenance Schedule

Vehicle maintenance is performed based on the mileages or months, whichever comes first.

Item	Interval
Brake friction block and disc	Check every 24 months or 20,000 miles.
Brake piping and hoses	Check every 24 months or 20,000 miles.
Steering wheel and tie rod	Check every 24 months or 20,000 miles.
Drive shaft boot	Check every 24 months or 20,000 miles.
Ball pin and boot	Check every 24 months or 20,000 miles.
Front and rear suspensions	Check every 24 months or 20,000 miles.
Tyre condition and pressure, including TPMS	Check every 24 months or 20,000 miles.

Item	Interval
Tyre wear (check front and rear wheel alignment when tyre uneven wear is greater than 2 mm, or 0.079 in.)	Check during maintenance and rotate when necessary. In severe driving conditions, check more frequently and rotate when necessary.
EPS corrosion and foreign materials on or ablation of connectors, including wiring harness GND point	Check every 24 months or 20,000 miles.
Coolant level in expansion tank	Check every 24 months or 20,000 miles.
Brake fluid	Check every 24 months or 20,000 miles.
Bumps or deformation of the highvoltage battery tray, crash bar, shield, and explosion-proof valve, and powertrain leaks	Check every 24 months or 20,000 miles.
A/C filter	Check every 24 months or 20,000 miles and replace if necessary. In severe driving conditions, check every six months and replace if necessary.
Drive motor coolant	Replace the long-acting organic acid coolant every six years or 60,000 miles.
Brake fluid	Check during maintenance and replace every 24 months or 20,000 miles.
Gear oil in the transmission	Replace the gear oil at 24 months or 20,000 miles for the first time, and every 24 months or 30,000 miles afterwards.
Note: When checking Item 1, replace chassis parts in a timely manner if any abnormal damage is found.	

**CAUTION**

- Brake friction pads and discs need to be checked more frequently in severe weather conditions, such as extremely cold regions like Norway, Finland, and Iceland.

**REMINDER**

- To keep the high-voltage battery in optimal condition, please fully charge and discharge the vehicle

**REMINDER**

regularly, at least every six months or 44,739 miles (72,000 km), whichever comes first, for battery self-calibration. You can also contact a BYD authorised dealer or service provider for capacity testing and calibration.

Severe driving conditions refer to:

- Frequent driving in dusty areas or frequent exposure to salt-laden air.

- Frequent driving on bumpy, puddled, or mountain roads.
- Driving in cold weather.
- Frequent and sudden braking.
- Frequent use of a towed trailer.
- Use as a taxi.
- Driving in congested urban areas at temperatures above 90°F (32°C) for more than 50% of total travel time.
- Driving at speeds over 75 mph (120 km/h) at temperatures 90°F (32°C) for more than 50% of total travel time.
- Frequent overloading.

Regular Maintenance

Regular Maintenance

- Be sure to maintain the vehicle as per the maintenance schedule to allow it serve in the best working efficiency and reduce fault occurrence.
- Drivers can refer to the maintenance plan for scheduled maintenance intervals, depending on the odometer reading or time interval, whichever comes first.
- For overdue maintenance items, the same time interval should be used for maintenance.
- It is recommended that maintenance be performed in accordance with the standards and specifications of BYD Auto Co., Ltd., and by a local BYD authorised dealer or service provider.
- The maintenance schedule lists the maintenance items and travel time or distance based on the assumption that the vehicle is used as a normal means

of transportation to carry passengers and goods that do not exceed the vehicle load limit.

CAUTION

- Please maintain the vehicle regularly according to the requirements in the Warranty and Maintenance Service Manual of BYD.

Vehicle Servicing

- Pay attention to vehicle performance, sound changes, and visual evidence that indicates service is required. Under any of the following circumstances, the vehicle may need to be checked or repaired, and it is recommended to send the vehicle to a BYD authorised dealer or service provider as soon as possible:
 - Motor start produces unusual noises.
 - Coolant remains overheated, is stagnated or leaks.
 - Motor jams and produces unexpected noise.
 - The motor runs with excessive vibration.
 - The motor fails to get started.
 - Electric assembly leaks oil.
 - Electric assembly emits odours.
 - Power declines significantly.
 - Water leaks from under the vehicle (A/C condensate is normal).
 - Tyre deflates; tyres make excessive noises at turns; tyre wear is uneven.
 - Vehicle leads to one side when driving straight on a flat surface.
 - Suspension unit movement leads to unusual noises.

- Loss of braking effect; sponge feeling on the brake pedal; pedal almost contacts the floor; vehicle leads to one side when braking.
- Motor coolant temperature remains high.
- Battery capacity decreases significantly.
- High battery temperature or overheat protection persists, or there is no power output.

 **WARNING**

- Do not continue driving a vehicle that has not been inspected, as this may result in serious vehicle damage and personal injuries.

Vehicle Corrosion Prevention

The most common causes of vehicle corrosion are:

- The underbody of the vehicle is covered in salt, dust or moisture.
- The vehicle or some of its parts are exposed to high humidity and high temperature for a long time.
- The paint layer or underlayer is scratched by minor collision or by stones and gravel.

The following rules should be observed to prevent vehicle corrosion:

- Wash the vehicle frequently.
- If driving on saline roads in winter or living in coastal areas, wash the landing area of the vehicle at least once a month, and clean the chassis and hubcap with a high-pressure water jet or steam to reduce corrosion. Wash the chassis thoroughly after winter.

- Check vehicle paint and trims.
 - Any chip or crack found on the paint must be repaired immediately to prevent corrosion. If fragments or cracks peel off from the metal surface, it is recommended to go to a BYD authorised dealer or service provider for repair.
- Check interior vehicle.
 - Moisture and dust buildup under the carpet can cause corrosion. Check the undersides of carpets frequently to make sure these areas are dry.
 - Special care should be taken when the vehicle is transporting chemicals, detergents, fertilisers, salt, and other substances. Such substances should be kept in appropriate containers for transportation. If spillage or leakage is found, clean immediately and keep dry.
- Use fenders.
 - Fenders protect vehicles in saline areas or on gravel roads. The bigger and closer to the ground the fender, the better.
- Park in a well-ventilated and dry area.

Paint Maintenance Tips

- Clean the vehicle in time.
- Do not perform secondary painting if there is no obvious scratches on the finish, so as to prevent mismatch or colour incompatibility.
- When the vehicle is not used for a long period, it should be parked in a garage or a well-ventilated place, and special body cover should be used in winter. Choose a shady place for parking temporarily.
- Prevent strong impacts, knocks, or scratches on the paint. If the paint

is scratched, dented or if it peels, it should be repaired in time, preferably by professional auto beauty provider.

- Do not touch the paint with a greasy hand or cloth. Do not place greasy tools or rub with organic solvents on the vehicle body so as to avoid chemical reactions.
- The vehicle must be waxed once a month or whenever water resistance performance of the vehicle degrades and be taken to an auto beauty provider for maintenance once every three months.
- High quality polish and wax must be used. If body finish is severely weathered, use a car cleaning polish in addition to the wax. Carefully follow the manufacturer's instructions and precautions. Chrome finish should be polished and waxed as well as painted finish.

CAUTION

- When the vehicle is repainted and placed in a high-temperature paint waxing workshop, the vehicle's plastic bumper must be removed to avoid damage caused by high temperatures.

Vehicle Cleaning

- The vehicle must be cleaned in time under the following circumstances, which can cause peeling of paint layer or corrosion of the vehicle body and parts:
 - Driving along the coast.
 - Driving on a road with antifreeze.
 - Driving on roads covered with coal tar.

- Resin, bird droppings, or insect carcasses are stuck on the vehicle.
- Driving in areas with a large amount of smoke, soot, dust, iron filings, or chemicals.
- The vehicle is visibly soiled by dust or mud.
- After raining.

Manual Vehicle Washing

Before washing the vehicle, park it in the shade, and wait for the vehicle to cool down sufficiently.

1. Hose off loose dirt, including all mud or road salts at the bottom of the vehicle and on wheel pits.
2. Wash the vehicle with neutral agents, the mixing of which should be carried out according to the manufacturer's instructions. Soak a soft cloth with cleaning solution and gently wipe it down along the direction of the water flow. Do not wipe in a circular motion or horizontally.
3. Rinse well—Dried washing agent forms markings. After washing the vehicle in hot weather, rinse all parts properly.
4. Dry the vehicle with a clean soft towel to prevent stay water marks. In order to prevent scratching, do not rub or apply excessive force on the paint.

REMINDER

- Do not use any alkaline washing powder, soapy water, detergents, de-waxing detergents or volatile substance (gasoline, kerosene, or solvent).
- When cleaning the lights, do not wipe their surface with alcohols such as alcohol and windscreen washer fluid, ketones

! REMINDER

such as lacquer thinner and insect remover, or other chemical solvents such as gasoline, thinner, and carbon tetrachloride. Doing so can cause the light casings to crack.

- It is recommended that vehicles travelling in coastal or heavily polluted areas be washed once a day.
- When washing the vehicle, make sure that the high-pressure water jets are at a sufficient distance from the vehicle, and do not aim them directly at the sealing strips, to prevent high pressure from distorting and even damaging the strips and water from leaking into the vehicle.
- Do not use blades or gasoline to remove hard dirt from the vehicle body. The plastic wheel trim is easily damaged by organic matter. If any organic matter splashes on the vehicle trim, remove it with water and check whether the trim is damaged. Please replace any seriously damaged plastic wheel trim in a timely manner. Otherwise, the trim may fall from the wheel during vehicle movement and cause an accident.
- Do not use abrasive cleaning agents to scrub the bumper.
- Clean polished metal parts with carbon cleaner and wax them regularly for protection.
- Be careful when cleaning the chassis to avoid cutting hands.

Automatic Vehicle Washing

When choosing an automated vehicle wash service, be aware of certain types of brushes, unfiltered rinsing water, or machine-specific rinsing procedures that may scratch the paint and affect its gloss and durability, especially darker colours. Before washing the vehicle, it is best to consult the staff of the car wash service provider to understand which washing procedures are the safest for the paint finish.

Interior Cleaning

! REMINDER

- Prevent direct water splash onto the dashboard or floor when washing the vehicle, as these may cause electrical faults.
- Do not wash the vehicle's floor.


Carpet

- Clean carpets with a good foam detergent.
- Use a vacuum cleaner to remove as much dust as possible. Several types of foam detergents can be used. Some are in spray cans, and others are powders or liquids that produce foam when mixed with water. Clean the carpets with foam soaked sponge or a brush, scrubbing in a circular motion.
- Do not use plain water, and keep the carpets as dry as possible.

Seat Belts

- The seat belts can be cleaned with neutral soapy water or lukewarm water.


- Scrub the seat belts with a sponge or soft cloth. Check the seat belts for excessive wear, tear, or cut marks.

 **CAUTION**

- Do not clean the seat belt with colourant or bleach. These substances may decrease the seat belt's strength.
- Do not use any seat belt that is not dry.

Doors and Windows


- Doors and windows can be cleaned with any ordinary detergent.
- Check the door brakes regularly. If a door brake lever is found with visible dust accumulation, wipe it with a wet soft cloth.

 **CAUTION**


- When cleaning the inside of the rear windows, take care not to scratch or damage electric heating wires or junctions.

A/C Control Panel, Car Speakers, Dashboard, Control Panel and Switches

- Clean the A/C control panel, car speakers, dashboard, control panel and switches with a wet soft cloth.
- Wipe dust off gently with a clean soft cloth soaked in lukewarm water.

 **CAUTION**


- Do not use organic substances (for example, solvents, kerosene, alcohol, and gasoline) or acid or alkali solutions. These chemicals can cause discolouration, staining, or flaking.

 **CAUTION**

- Please confirm that the detergent or polishing agent to be used does not contain the above substances.
- If a new liquid washing agent is used, do not splash it onto the interior surface of the vehicle, because it may contain the above substances. If there is any spillage, immediately clean it thoroughly.

Leather

- Leather trimmings can be cleaned with a neutral detergent for woolen.
- Use a soft cloth with a neutral detergent solution to wipe off the dust, and then use a clean, wet cloth to wipe the remaining detergent thoroughly.
- If leather gets wet, wipe it with a clean soft cloth and air dry it in a cool, ventilated place.
- For any questions about vehicle cleaning, please consult a local BYD authorised dealer or service provider.

 **CAUTION**

- If dirt cannot be cleaned off using a neutral detergent, clean it with a detergent that does not contain organic solvents.
- Do not clean leather with any organic material such as volatile oil, alcohol, gasoline, acid or alkali, as these will cause discolouration.
- Do not clean leather with a nylon brush or synthetic fiber cloth, as these may scratch the fine patterns on the leather surface.
- Mold may grow on dirty leather trimmings. Special care must be



CAUTION

taken to avoid oil stains and trimmings must always be kept clean.

- Prolonged exposure to sunlight will cause leather to harden or shrink, so the vehicle should be parked in a shady and cool place, especially in the summer.
- In hot weather, avoid placing vinyl or waxy items on the trimmings, as these may stick to leather in high temperatures.
- Improper cleaning of leather trimmings may cause discoloration or spots.

Self-Maintenance

Self-Maintenance

Self-Maintenance Precautions

- If maintenance is to be carried out by the owner, be sure to follow the correct steps specified in this section.
- Note that improper and incomplete maintenance will affect the use of the vehicle.
- This section only lists instructions on simple maintenance items that can be done by the owner. However, there are many items that must be done by qualified technicians with special tools.
- Special care must be taken in maintaining vehicles to prevent accidental injuries. Make sure to obey the followings:



CAUTION

- Beware of short circuits, as some circuits and vehicle components carry high current or voltage.
- If coolant overflows, wipe it with a dry cloth or tissue to prevent damage to components or vehicle paint.
- If brake fluid overflows, rinse it with water to prevent damage to components or vehicle paint.
- When replacing wiper blades, do not allow the wipers to scratch the glass surface.
- Before closing the bonnet, check whether any tool or wipe cloth is left in the engine compartment.
- When working inside or under the vehicle, always wear goggles to protect your eyes against flying or falling objects or splashing liquid.
- As brake fluid may damage the skin or eyes, be careful when filling it. If your skin or eyes are exposed to brake fluid, immediately flush with clean water. Seek medical attention immediately if discomfort persists.

Checks

The following items should be checked according to usage or specified mileage:

- Coolant level - Check the expansion tank coolant level at each charge.
- Windscreen washer fluid - The residual amount of washer liquid in the tank should be checked monthly. When washer liquid is frequently used, the residual amount of liquid should be checked at each charge.

- Windscreen wiper - Check wiper conditions monthly. If the wiper does not work, check it for wear, cracking, or other damage.
- Brake fluid level - Check the level monthly.
- Brake pedal - Check whether the brake pedal is operating properly.
- EPB switch - Check whether the switch is functional.
- Low-voltage battery - Check battery conditions and check for terminal corrosion monthly.
- A/C system - Check the operation weekly.
- Tyres - Check tyre pressure monthly. Check tread wear and whether there are foreign bodies embedded.
- Windscreen defrosters - Check the defroster vent monthly.
- Lights - Check the condition of headlights, position lights, tail lights, high mount brake light, turn signals, rear fog lights, brake lights and license plate light monthly.
- Doors - Check whether the boot lid and all other doors (including rear doors) can be opened freely and locked securely.
- Horn - Check whether the horn is functioning properly.



REMINDER

- Do not continue driving a vehicle that has not been inspected, as this may result in serious vehicle damage and personal injury.

Combination Lights

Front combination lights

- Front combination lights are aligned before vehicle delivery. If the vehicle carries heavy load frequently, front combination lights may need to be realigned. It is recommended to have the front combination lights aligned by a BYD authorised dealer or service provider.

Fogging of lights

- Combination lights, tail lights, and turn signals on the side mirrors may become foggy after heavy rain or cleaning. This is similar to condensation on the side window during rain. It does not mean any problem with your vehicle.
- The lights are a relatively enclosed and narrow space. The temperature is very high when they light up (the mask and reflector could be burned and deformed easily), so they need heat dissipation. There are heat dissipation holes on the lamp housing for convection. The greater the temperature difference is, the more active the convection is. During the convection, the moisture in the air inevitably enters a lamp. Factors such as exposure to sunlight, convection, and bulb heating can cause the moisture in the air to condense into fog or water beads easily on the lamp surface at low temperatures. This is called fogging of lights.



REMINDER

- If fog presents inside the combination lights and inside the turn signal on the side mirror, it may be due to high air humidity or significant temperature difference between the vehicle and its surroundings. In that case, turn on the combination lights or turn signal while driving. The fog will



REMINDER

evaporate after a short period of driving.

- If there is a noticeable amount of water inside the lights, it is recommended to drive the vehicle to a BYD authorised dealer or service provider for maintenance.

Vehicle Storage

- If the vehicle needs to be parked for a long time (more than a month), the following preparations should be made. Proper preparation helps prevent degradation and ensure easy use of the vehicle. If possible, park the vehicle indoors.
- Charge the vehicle on time.
- Thoroughly clean and dry the body surface.
- Clean the interior of the vehicle to ensure that carpets and mats are completely dry.
- Release the parking brake and set the gearshift lever in parking gear.
- Open one window slightly (if the vehicle is stored indoors).
- Disconnect the negative terminal of the low-voltage battery.
- Pad the front wiper arm with a folded towel or cloth to keep it out of contact with the windscreen.
- To reduce adhesion, apply silicone lubricant to all door seals and body wax to the painted surface where the door seals meet.
- Cover the vehicle body with a breathable covering made of a "porous material", such as cotton. Non-porous materials, such as plastic sheeting, can

build up moisture and damage the paint.

- If possible, start the vehicle regularly (preferably once every month). If the vehicle has been parked for a year or more, go to a BYD authorised dealer or service provider for comprehensive maintenance.

Bonnet

Opening and Closing the Hood

Open the bonnet

1. Do not open the bonnet when the wiper arms are pulled up, as this may damage the bonnet's paint.
2. Pull the handle on the left under the dashboard twice. The bonnet unlocks and opens slightly.
3. Lift up the bonnet and support it with the with a stay bar.



Close the bonnet

1. Remove the stay bar. Lower the bonnet to about 30 centimeters above the front grille and release it, so that the fall locks it. Do not press the bonnet with hands to close it.



2. After closing the bonnet, check whether the latch is securely locked. If the bonnet can still be lifted slightly, it indicates that it is not locked correctly. Open the bonnet again and then close it correctly according to the above steps.

WARNING

- When closing the bonnet, confirm that nobody is within the range of the falling bonnet.
- Ensure that the bonnet is closed and locked firmly before driving. If the bonnet is not closed properly, it may suddenly open during driving, resulting in accidents and personal injuries.
 - The correctly closed bonnet is level with the adjacent vehicle body.
 - If the bonnet is not closed tightly when driving, stop immediately and close the bonnet to prevent accidents.

CAUTION


- Do not press the front of the bonnet. Heavy pressure may damage the bonnet, causing dents in the surface or bending the edges.

CAUTION

- Do not force down the bonnet or release it from a high position.

Cooling System

- It is required that the liquid level should be between the Maximum (MAX) and Minimum (MIN) marker lines of the expansion tank.
- The coolant must always be of the same specification as the original, without adding any mixture. Different brands and types of coolant should not be mixed.

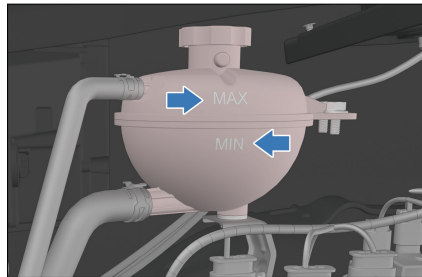

- Refill coolant to the MAX line if the level is below the MIN line. Check the cooling system for leakage.

REMINDER

- Do not add any rust inhibitor or other additives to the cooling system, for they may be incompatible with the coolant or the motor components.
- Before opening the reservoir cap, make sure that the motor, high-voltage electronic control assembly, refrigerant reservoir and radiator are all cooled down. Opening the coolant expansion tank when the motor has not yet fully cooled down may cause




REMINDER

coolant to squirt out, resulting in severe burns.

Braking System


- Check the level in the fluid tank monthly, and change the brake fluid according to the travel time and mileage specified in Maintenance Schedule.
- Be sure to use the brake fluid of the same specifications as the original brake fluid, and different types of brake fluid must not be mixed.
- It is required that the level in the fluid tank should be between "MAX" (maximum level) and "MIN" (minimum level) marks.
- If the level is below the MIN mark, check if the braking system leaks and the brake friction blocks are worn.

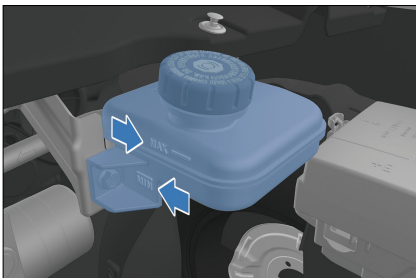

Windscreen Washer

- During normal use, check the liquid level of the windscreen washer reservoir at least monthly.
- If the windscreen washer is used frequently, the level of the washer reservoir should be checked more frequently.

- High quality windscreen washer fluid should be added to improve stain removal and prevent freezing in cold weather.

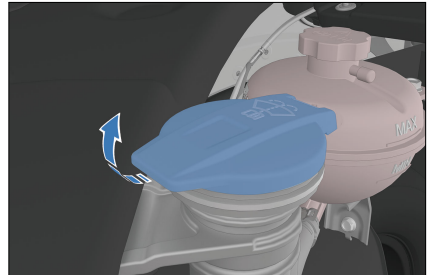

- When refilling the washer fluid, use a clean cloth dipped in the windscreen washer fluid to clean the windscreen wiper blade. This helps keep the wiper blade in good condition.



CAUTION

- Do not inject vinegar-water solution or acid solution into the windscreen washer fluid reservoir.
- It is recommended to use certified windscreen washing fluid having a pH value from 6.5 to 10.

A/C System

- The A/C system is a closed system, and any important maintenance work should be performed by professionals from a BYD authorised dealer or service provider.
- The following practices help ensure that the A/C system works effectively.
 - Check the radiator and A/C condenser regularly.
 - Remove leaves, insects, and dust from the front surface of the A/C system. These deposits hinder the air flow and reduce the cooling effect.

- In cold months, turn the A/C on once a week for at least 10 minutes to circulate the lubricating oil in the refrigerant unit.
- If A/C cooling efficiency decreases, go to a BYD authorised dealer or service provider for maintenance.

CAUTION

- Whenever the A/C system is maintained, the maintenance station should use a refrigerant recycling system. The system can recycle refrigerant to avoid environmental pollution caused by directly discharging refrigerant.


Wiper Blades

The blade strip, made of synthetic rubber, is a vulnerable part. Various service environment of the vehicle and usage habits of drivers can damage the blades. Therefore, please observe the following to ensure the service life of blades and driving safety:

- Do not use a blade to remove ice from the windscreen surface. Use a customised ice scraper.
- Do not scrape the windscreen surface if it is dirty, greasy or waxy.
- Keep the windscreen surface clean. Do not scrape dust, sand, insects, or foreign bodies on the windscreen surface.
- Do not wax the windshield when washing the vehicle and maintaining the body paint, as the wax layer reflects light in poor light, consequently affecting the sight and driving safety. After washing the vehicle, rinse the blade with plain water, and use special windscreen wax cleaner to remove the wax layer on the windshield.

- To prevent excessive water pressure from damaging the blades, do not wash the blades directly with a water jet.

Maintenance Rules

- Clean windscreen and blade regularly (preferably once a week or once every two weeks).
- Wipe the wiper regularly (preferably once a day or once every two days). When using a blade to wipe the windscreen, keep the windscreen fully wet. (When there is no rain, the washer liquid must be sprayed in advance).
- Clean the windscreen with a special windscreen washer fluid.
- Promptly clean mud and insect carcasses stuck to the windscreen with a rag.
- When there are marks on the windscreen caused by gravel, maintenance must be carried out timely. (It is recommended that windscreen repair resin products should be used and the windscreen should be replaced if marks are too large or too many.)
- Replace the wiper blades regularly, preferably once every six months.
- When cleaning the windscreen, raise the wiper arm in advance. The specific operation method is as follows:
 1. Go to the infotainment touchscreen →  → **Service** → **Overhaul** to enable wiper maintenance. The wiper is then rotated down.
 2. Grasp the upper end of the wiper arm and carefully lift the wiper arm and blade assembly.

Tyres

- For safe driving, tyres must be made and sized to fit the vehicle, with good tread and standard tyre pressure.

WARNING

- Using tyres with excessive wear or insufficient/excessive pressure can result in accidents, severe injury, or death.
- Please follow all instructions in this manual regarding tyre inflation and maintenance.

Tyre Inflation

- Keep tyres properly inflated to provide the best combination of maneuverability, tread life, and driving comfort.
- Under-inflated tyres can cause uneven tyre wear, affect maneuverability and energy consumption, and are prone to leakage due to overheating.
- Over-inflated tyres reduce riding comfort and are prone to damage from uneven roads. In severe cases, the risk of tyre bursting poses severe threats to the safety of the entire vehicle. Over-inflation will also cause uneven wear and tear of tyres, affecting tyre service life.
- When tyres are cold, you can decide whether to replenish tyre pressure according to the tyre pressure values displayed on the instrument cluster.
- Tyre pressure should be measured while tyres are at ambient temperatures. This means that it should be measured at least three hours after stopping the vehicle. If you must drive the vehicle before the tyre pressure is measured, tyres can still be considered at ambient temperatures

as long as the travelled distance is not more than 0.9 mile (1.6 km).


- It is normal that tyre pressure reading measured while tyres are hot (after travel of several miles) is 0.3–0.4 bar (30–40 kPa) higher than when tyres are cold. In that case, do not deflate tyres in order to achieve the specified cold tyre pressure reading; otherwise, the tyre pressure will be insufficient.

REMINDER

- The recommended cold tyre pressure is indicated on the label affixed to the driver's door frame.
- Tubeless tyres have a self-sealing function when they are punctured. However, because in fact usually there is a very slow air leak, as soon as the tyre begins to depressurise, carefully look for the leak location.

Tyre Checks

- Whenever checking tyre inflation, check tyres for damage, foreign body piercing, and wear.
- Replace the tyre if bumps, or tread or side damage are found. Tyres must be replaced if any of the cases happens.
- Replace the tyre if there are cracks on its side, or if its fabric or cord can be seen.
- Replace tyres with excessive tread wear.
- Tyre treads are cast with wear bars. When the tread is even with the wear bar, its thickness is less than 0.063 in (1.6 mm). The adhesion of tyres worn to this extent is very small on wet roads.

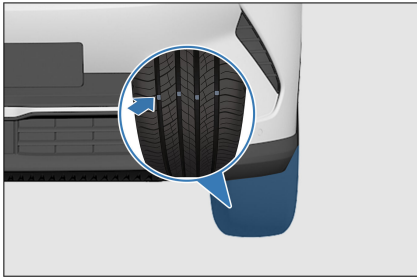

- Tyres with exposed wear bars are experiencing serious performance loss and therefore must be replaced.

Maintenance

- In addition to proper inflation, proper wheel alignment also helps reduce tread wear.
- If uneven tyre wear is found, go to a BYD authorised dealer or service provider and check the wheel alignment.
- Although the vehicle has been balanced in the factory, it needs to be re-balanced after running for a period of time.
- If there is some kind of continuous vibration at high vehicle speeds (above 50 mph, or 80 km/h), but not at low vehicle speeds, go to a BYD authorised dealer or service provider for tyre checks.
- If a tyre has been repaired, be sure to re-balance it.
- After installing a new tyre or replacing a new wheel, always perform tyre balancing.

CAUTION

- Improper wheel balancers can become loose and fall off, which damages the vehicle or surrounding objects during vehicle travel.

CAUTION

- Improper wheel balancers damage the aluminium rims of the vehicle. Therefore, it is recommended to use original wheel balancers to keep balance.

Tyre Rotation


- In order to make tyres wear the same and prolong their service life, it is recommended to check the wear of the tyre inner and outer tread every 6,213 miles (10,000 km) and conduct four-wheel alignment, inspection and adjustment as well. Rotate the tyres if necessary.
- Do not rotate tyres when a spare tyre* is used for the vehicle.
- After tyre replacement, contact a BYD authorised dealer or service provider for tyre pressure matching.

Directional tyres and wheels

- When purchasing replacement tyres, you may find that some tyres are "directional", which can only be rotated in one direction. If directional tyres are used, only the front and rear wheels can be swapped when rotating tyres.

- Tire rotation is as shown:

- ① Non-directional tyres and wheels.
- ② Directional tyres and wheels.

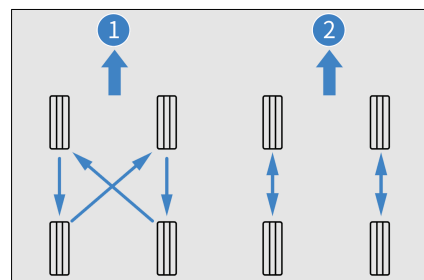

Replacing Tyres and Wheels

- Original tyres maximise performance, while providing the best combination of maneuverability, driving comfort and service life.
- It is recommended to go to a BYD authorised dealer or service provider for replacement of original tyres.
- Replacement of tyres with different sizes, road ranges, rated speeds and maximum cold pressures (marked on the tyre side) or mixed use of radial tyres and diagonal tyres can reduce braking ability, driving force (ground adhesion) and steering accuracy.
- Unsuitable tyres affect the maneuverability and stability of the vehicle, and may lead to accidents.
- Do not replace only one tyre, otherwise it will seriously affect the maneuverability of the vehicle.
- ABS works by comparing wheel speed. When replacing a tyre, use a tyre of the same size as the original tyre. The size and structure of the tyre affect wheel speed and may lead to uncoordinated system operation.
- If the wheel needs to be replaced, ensure that the specifications of the new wheel match those of the original wheel. New wheels are available for purchase at BYD authorised dealer or service provider. Please consult a BYD authorised dealer or service provider before replacing the wheels.

WARNING

- Please observe the following precautions to ensure proper vehicle maneuverability and control.

WARNING

- Do not mix radial tyres, bias belted tyres, or diagonal ply tyres on the vehicle.
- Do not use tyres with dimensions other than those recommended by the manufacturer.

Fuses

All vehicle circuits are provided with fuses to prevent short circuit or overloading. These fuses are mounted in the under-bonnet power distribution box (PDB) and the dashboard PDB, respectively.

- The under-bonnet PDB is located beside the left fender of the engine compartment.
 - Remove the upper cover of the under-bonnet fuse box, and turn over it to view the fuse box label.
- The dashboard PDB is located in the shield under the dashboard.
- The anode fuse box is located above the low-voltage battery.
- Replacement of blown fuses with ones of higher amperage can significantly increase the likelihood of damage to the electrical system.
- If there is no spare fuse of the same amperage, use a fuse with lower amperage instead.

REMINDER

- Do not use fuses with amperage higher than the rated ampere value or any other solution to replace the fuses, as this can cause serious damage or even a fire.

07

WHEN FAULTS OCCUR

When Faults Occur.....178

When Faults Occur

Reflective Vest

- The reflective vest is in the tool kit. In case of emergency, always wear the reflective vest properly before you check for faults or handle accidents to ensure your safety.

If Smart Key Battery Is Exhausted


If the smart key indicator does not flash and the vehicle cannot be started using the start function, the smart key battery may be exhausted. It is recommended to contact a BYD authorised dealer or service provider for battery change as soon as possible. In this case, you may start the vehicle in no power mode.

CAUTION

- Do not place the key in areas at high temperatures.
- Do not hit or slam the key with hard objects.
- Magnetic fields generated by nearby radio stations, substations or airport radio transmitters may interfere with the normal operation of electronic smart keys.
- After locking the vehicle and arming its anti-theft alarm system, keep the key away from the vehicle if you do not use the vehicle; otherwise the automatic card finding of the vehicle will consume the power of the low-voltage battery and the smart key.

Starting the vehicle when the electronic smart key runs out of battery:

1. Use the mechanical key to unlock the vehicle.
2. Hold the smart key close to the designated sensor area at the bottom of the front left cup holder.
3. Press the START/STOP button and the brake pedal to start the vehicle.

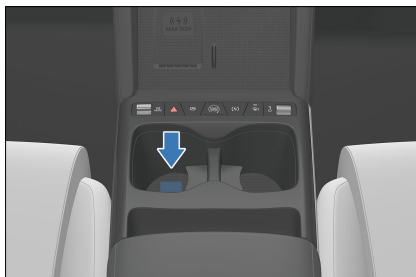

Emergency Shutdown System

- The emergency shutdown system is activated and the high-voltage system is automatically shut down when the following conditions are met:
 - The vehicle has experienced a collision.
 - The vehicle system is faulty.
- The OK indicator goes off if any of the above situations occurs.
- Activating the emergency shutdown system in the noted types of collision minimises the risk of injuries or accidents.
- The vehicle system cannot be switched into the OK status once the emergency shutdown system is activated. In that case, it is recommended to contact a BYD authorised dealer or service provider for help. The system is turned

off immediately even if the ignition is switched on. Contact a BYD authorised dealer or service provider as soon as possible.

If a Collision Occurs

- The vehicle has experienced a collision.
 1. Immediately power off the vehicle, turn on the hazard warning light, evacuate occupants to a safe area, and place a hazard warning sign on the rear of the vehicle in accordance with local codes.
 2. Call the police rescue number according to the actual situation and contact a BYD authorised dealer or service provider.
- The vehicle collision will activate the emergency shutdown system and the "OK" indicator lights off. In that case, the vehicle will fail to be in a driver-ready state. It is recommended to contact a BYD authorised dealer or service provider.
- If it is not possible to estimate the extent of damage to the vehicle after a collision, do not get close enough to touch the vehicle to avoid the risk of high voltage shock.
- If the occupant is trapped and needs to be cut into the vehicle for rescue, contact the professional rescuer for cutting and disconnect the high-voltage system before cutting. Cutting schematics can be found on the Rescue Sheet in the documentation that came with the vehicle, or offered by contacting a BYD authorised dealer or service provider.

WARNING

- Do not carry out maintenance work during charging.

WARNING

- Do not disassemble, move, or alter high-voltage battery components and connecting cables as their connectors can cause serious burns or electric shock and may result in personal injuries or death. The orange cables are part of high-voltage wiring harness. Users must not repair the vehicle's high-voltage system by themselves. If any repair is required, it is recommended to go to a BYD authorised dealer or service provider for repair.

If the High-Voltage Battery Leaks

After a collision, if there is battery leakage, an acrid smell inside the vehicle, visible acid flow outside the vehicle, or any smoke with the battery pack:

1. Immediately power off the vehicle and evacuate occupants away from the vehicle. It is recommended to call immediately a BYD authorised dealer or service provider for rescue.
2. Disconnect the low-voltage battery wearing a protective mask and anti-corrosion gloves if conditions permit.
3. Carry out a simple inspection, if conditions permit: Check whether any edge of the high-voltage battery tray is cracked and whether any obvious liquid flows out.
 - In case of light leaks, avoid potential sources of fire or flammable materials. Absorb leaks with an absorbent pad, and place the waste in a closed container or burn the waste. Wear anti-corrosion gloves before the operation. In the event of

a severe leak, clean up any leaked fluids and treat them as hazardous waste. Calcium gluconate solution can help treat toxic HF gases.

- If skin comes in contact with leaked fluid, wash it immediately with plenty of water for 10-15 minutes. If there is still any discomfort, apply 2.5% calcium gluconate ointment, or soak in 2% to 2.5% calcium gluconate solution. If the condition does not get better or discomfort persists, seek medical help immediately.

WARNING

- Do not touch any spilled liquid, and stay away from a leaking vehicle or high-voltage battery.
- Do not dispose of the leaked fluid into the water or soil or other environment.
- The vehicle system operates with high-voltage DC power. It generates a lot of heat before and after vehicle start-up and when the vehicle is powered off. Watch out for high pressures and high temperatures.
- The remote control key and high-voltage components of the vehicle may affect and harm people carrying medical devices.

If a Fire Occurs

If the vehicle is on fire, immediately power off the vehicle and evacuate occupants away from the vehicle. Under the premise of ensuring personal safety, the following operations are carried out according to the actual situation:

1. Call the police rescue number according to the actual situation and

contact a BYD authorised dealer or service provider.

2. If the fire is small and slow, use a dry powder fire extinguisher to put out the fire.
3. If the fire is large and growing quickly, stay away from the vehicle to stand to the wind position, and wait for professional rescue.

CAUTION

- Use fire extinguishers of designated type. Water or incorrect fire extinguishers may cause electric shock.
- In the event of other special conditions that cause flying projectiles (such as interior trims and glass), stay away from the vehicle and promptly ask a BYD authorised dealer or service provider to come to the site for handling.
- If you inhale smoke, seek medical attention immediately.

If the Vehicle Needs Towing

If the vehicle needs towing, it is recommended to contact a BYD authorised dealer or service provider, a professional towing service, or the organisation you joined for roadside assistance.


WARNING

- The vehicle must not be towed by other vehicles using only ropes or chains.

Recommended transporting method:

- Flatbed device

- If the vehicle fails and needs towing, a flatbed is recommended. When the vehicle is being towed, keep its four wheels off the ground. Towing the vehicle on front or rear wheels alone may damage high-voltage components.

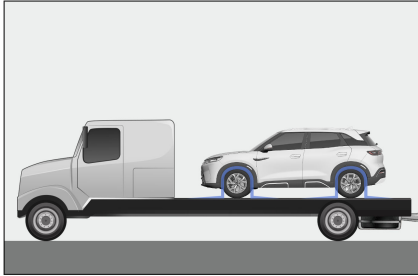


⚠ CAUTION

- When moving a vehicle with a flatbed trailer, make sure that the vehicle is properly secured to prevent it from sliding back.
- It is recommended to use professional tie-down straps and tensioners, and employ the over-the-wheel method to secure the vehicle.
- When fixing the vehicle, avoid routing tie-down straps, ropes, or other securing devices through the wheels or attaching them to the chassis, suspension, or any other part of the vehicle body to prevent damage.
- Ensure the vehicle's wheels are immobilised during transport to prevent potential damage.


Tow Eye

Installation position

- Front tow eye

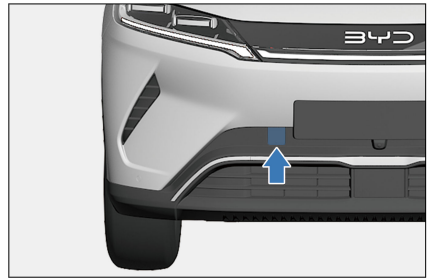

- Rear tow eye*

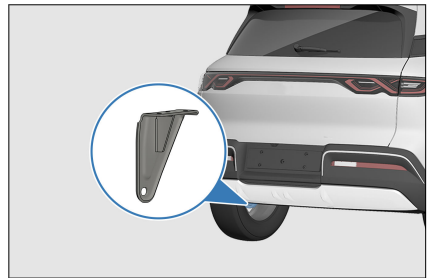

How to Use

1. Pry it open with a cross screwdriver.
 2. Install the tow eye in the tow eye opening.
- If the vehicle needs rescue, contact a professional rescue or the customer service number.
 - In emergency situations where the vehicle needs to be towed for rescue, follow the precautions below. If these precautions conflict with applicable regulations, always adhere to applicable regulations to prevent vehicle damage or personal injury.
 - The towing vehicle must be in good conditions and the towed vehicle in Neutral gear. The towing speed must be no more than 3 mph (5 km/h).
 - Never use jerking actions to pull the vehicle.
 - The towed vehicle must not carry any person except for the driver.

- Both towing and towed vehicles must have their hazard warning lights on.
- To avoid damages to the vehicle, only the in-vehicle tow eye can be used.
- The distance between the towing and towed vehicles must be more than 4.4 yd (4 meters) but less than 10.9 yd (10 meters).
- The width and weight of the towed vehicle must not be greater than those of the towing vehicle.
- When towing the vehicle, ensure its surroundings are unobstructed and have enough space and no person is close to the towing device.
- When freeing the vehicle, control to make it travel in the direction of tow force. Dragging the vehicle from the side or vertically is prohibited.
- The towed vehicle must be controlled by a driver inside the cabin, with the steering and braking systems in normal conditions.


! WARNING

- Rescuing a stuck or high-centred vehicle by using the tow eye is prohibited. Instead, calling a professional rescue or the customer service number is recommended.
- If the steering or braking system of the towed vehicle fails, contact a professional rescue or call the customer service number. Do not tow the vehicle directly.

If a Tyre Goes Flat

- In case of a flat tyre, slow down, keep straight and drive off the busy road to a safe place.

- Park on solid, flat ground and avoid motorway forks.
- Engage the EPB and press the "P" button.
- Power off the vehicle and turn on the hazard warning light.

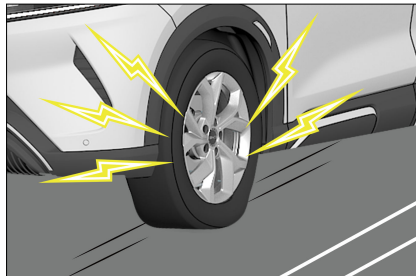

- Be sure to have all passengers get off the vehicle and ask them to go to a safe place away from crowded traffic.
- To prevent slipping, secure the vehicle by wedging the tyre diagonally against the flat tyre.

! CAUTION

- Do not continue driving with a flat tyre. Even a short distance of driving with flat tyre can cause irreparable damage.

In-Vehicle Tools

In-vehicle tools are stored in a tool box under the boot cover flap.

These include: warning triangle, reflective vest, lug nut cap removal clamp, tyre repair kit, and tow eye.

! REMINDER

- In an emergency where you need to service the vehicle yourself, you must know how to use these in-vehicle tools and their locations.

Placing the warning triangle

The warning triangle is used to warn vehicles coming from behind and to avoid collisions due to high speed or late braking.

! REMINDER

- When parking for repair, remember to place a hazard warning sign in accordance with local codes. The red side of the triangular warning sign should face the oncoming vehicles to warn them to avoid danger.
- After use, recover the warning triangle for future use.

How to use the warning triangle:

1. Take the warning triangle out of its box.
2. Attach the ends to form a triangle.
3. Mount the supports as shown.



Using Tyre Repair Kit*

- The tyre sealant is used to seal small cuts, especially tread cuts or punctures. It is just an emergency solution for you to drive to the nearest service centre, and only for short emergency stretches, even if the tyre is not deflated.

! WARNING

- At most, the tyre repair kit can repair holes that are on the tyre tread and are within 0.24 in (6 mm) in diameter. Do not use the kit on holes with larger diameters or in other tyre positions, but call for roadside assistance instead.
- Tyre sealant is highly flammable and harmful to health. Take necessary precautions to prevent fire and avoid contact with skin, eyes, and clothing; keep away from children; and do not inhale its vapour.

In case of contact with tyre sealant:

- If tyre sealant comes into contact with the skin or gets into the eyes, thoroughly flush the affected body part immediately with plenty of clean water.
- Change contaminated clothing immediately.
- In case of an allergic reaction, seek medical attention immediately.
- If tyre sealant is ingested by accident, rinse mouth thoroughly and drink plenty of water immediately. Do not induce vomiting, but seek medical attention immediately.


Using the tyre repair kit

- Refer to labels on the inflator and tyre sealant for usage of the kit.
- If the inflator needs to be connected to a power source, plug the inflator into the vehicle's 12V socket, start the vehicle, and turn on the inflator. The tyre sealant is then filled through the inflator hose into the tyre along with air.


! REMINDER

- Make sure the inflator switch is off when you plugging the power supply into the 12V socket in the vehicle.
- The inflator can only be turned on for up to 10 minutes.

- Observe the tyre pressure reading on the inflator.
- If the tyre pressure does not reach 1.8 bar (180 kPa) within 10 minutes (red area shown in the illustration), turn off the inflator. You are recommended to contact a BYD authorised dealer or service provider.

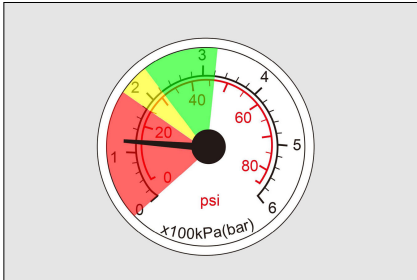

- If the tyre pressure reaches between 1.8 and 3.2 bar (180–320 kPa) (green and yellow areas shown in the illustration), remove the kit as soon as possible and drive at a speed below 49 mph (80 km/h) within one minute, with the furthest driving distance not exceeding 6.2 miles (10 km), so that the tyre sealant is evenly distributed within the tyre.

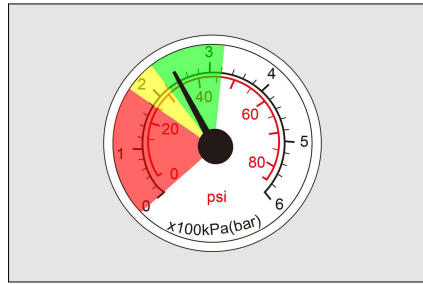

- Stop to check the repaired tyre and the tyre pressure reading on the inflator.
- If the tyre pressure is greater than 2.2 bar (220 kPa), drive to the nearest service centre at a speed below 49 mph (80 km/h).
- If the tyre pressure is between 1.3 and 2.2 bar (130–220 kPa), repeat the process to fill the tyre sealant into the tyre and observe the tyre pressure gauge reading on the inflator.
- If the tyre pressure does not reach 1.3 bar (130 kPa), it is recommended to contact a BYD authorised dealer or service provider.

! REMINDER

- Using tyre repair kit on damaged tyres is only an emergency solution. Please change the tyres at a professional repair centre as soon as possible. It is recommended that you contact a BYD authorised dealer or service provider and inform the maintenance technician that tyre sealant has been used.
- Avoid hard acceleration and high-speed turns.
- Abide by the maximum vehicle speed limit of 49 mph (80 km/h). Do not continue driving if any strong vibration, driving



REMINDER

instability, or noise occurs while the vehicle is running.

- When the tyre sealant is about to expire (see the label on the canister for exact date), replace it with a new one.
- After using the tyre repair kit, it is recommended to purchase a new tyre sealant at a BYD authorised dealer or service provider.

08

TECHNICAL DATA

Vehicle Data.....	188
Information.....	193
Declarations of Conformity.....	195

Vehicle Data

Specifications

Dimensions

Item	Parameter
Length	170 in. (4310 mm)
Width (excluding side mirrors)	72 in. (1830 mm)
Height	66 in. (1675 mm)
Wheelbase	103 in. (2620 mm)
Front track	62 in. (1570 mm)
Rear track	62 in. (1570 mm)
Front overhang	34 in. (863 mm)
Rear overhang	33 in. (827 mm)
Approach angle	18°
Departure angle	23°

Vehicle mass

Item	Parameter
Kerb weight	3505 lb (1590 kg)
Front axle load	1907 lb (865 kg)

Item	Parameter
Rear axle load	1598 lb (725 kg)
Maximum allowable total mass	4409 lb (2000 kg)
Front axle load at maximum allowable total mass	2149 lb (975 kg)
Rear axle load at maximum allowable total mass	2260 lb (1025 kg)
Number of occupants	5 persons

Drive motor

Item	Parameter
Model	TZ200XSW
Type	Permanent magnet synchronous motor
Drive type	Front-wheel drive
Rated power/revolving speed/torque	65 kW/4433 rpm/140 N·m
Peak power/revolving speed/torque	130 kW/16000 rpm/290 N·m

Vehicle power performance and economic efficiency

Item	Parameter
Maximum design speed	99 mph (160 km/h)
Maximum gradeability	30%
Power consumption per 100 km (62 miles) under comprehensive working conditions	17.0 kW·h/100 km (62 miles) (WLTP)



REMINDER

- The actual energy consumption depends on factors such

! REMINDER

as vehicle conditions, road conditions, and driving habits.

Wheels and tyres

Item	Parameter
Tyre specification	215/60 R17
Tyre pressure	2.7 bar (270 KPa)
Wheel dynamic balance requirement	≤ 10 g

Wheel alignment values (at kerb weight)

Item	Parameter
Front camber	$-0.9^{\circ} \pm 0.75^{\circ}$
Total front wheel toe-in	$0.116^{\circ} \pm 0.16^{\circ}$
Kingpin inclination angle	$11.47^{\circ} \pm 0.75^{\circ}$
Kingpin caster angle	$3.23^{\circ} \pm 0.75^{\circ}$
Rear camber	$-1.38^{\circ} \pm 0.5^{\circ}$
Total rear wheel toe-in	$0.088^{\circ} \pm 0.272^{\circ}$

Braking system

Item	Parameter
Free stroke of brake pedal	0.04~0.20 in. (1–5 mm)
Front brake disc standard thickness	1.02 in. (26 mm)
Front brake disc minimum thickness (mm)	0.94 in. (24 mm)
Rear brake disc standard thickness	0.39 in. (10 mm)

Item	Parameter
Rear brake disc minimum thickness	0.31 in. (8 mm)
Front friction plate standard thickness	0.31 in. (8 mm)
Front friction plate minimum thickness	0.08 in. (2 mm)
Rear friction plate standard thickness	0.26 in. (6.5 mm)
Rear friction plate minimum thickness	0.08 in. (2 mm)

High-voltage battery

Item	Parameter
Type	Lithium iron phosphate battery
Rated capacity	170 Ah

Recommended oil type and amount

Item	Parameter
Gear transmission oil type	BOT384;BOT383;W5
Gear transmission oil amount	21.12±1.76 imp oz (0.6±0.05 L)
Motor coolant type	Glycol organic acid antifreezing coolant -40°C
Motor coolant amount	130.23±17.6 imp oz (3.7±0.5 L)
Brake fluid type	DOT4/HZY6
Brake fluid amount	36.96±1.76 imp oz (1.05±0.05 L)

⚠ CAUTION

- The recommended oil types have been tested and approved by BYD. Using other oil types may compromise vehicle performance, and could cause malfunctions or damage to components.

Seats (when measuring cushion depth)


Item	Parameter
Seatback angle set for front seats	$23^{\circ} \pm 1^{\circ}$
Forward and backward moving spaces for front seats	7.9 in (200 mm) forward and 2.4 in (60 mm) backward from designed position; slide rail inclination: 4.5°
Normal service conditions of front seatbacks	Seatback 22.5° forward and 52.5° backward from the designed position
Seatback angle set for rear seats	$27^{\circ} \pm 1^{\circ}$
Forward and backward moving spaces for rear seats	Design condition, not adjustable (lay down when unlocked)
Normal service conditions of rear seatbacks	$27^{\circ} \pm 1^{\circ}$

Vehicle Identification


Vehicle Identification Number (VIN)

Positions of attached VIN:

- ① On the right side above the lock ring of the front bonnet inner panel
- ② On the right front corner of the upper dashboard body
- ③ On the front side of the motor
- ④ On the sheet metal surface of the front bumper beam

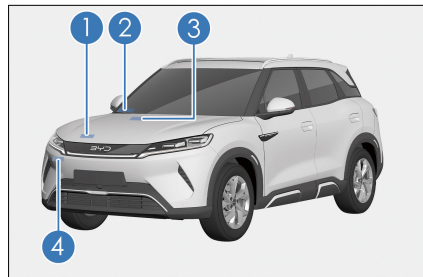

- ⑤ On the right side of the boot sheet metal
- ⑥ On the sheet metal surface at the lower left corner of the front right door
- ⑦ On the sheet metal surface inside the right rear door sill
- ⑧ On the sheet metal surface of the right rear wheel envelope.

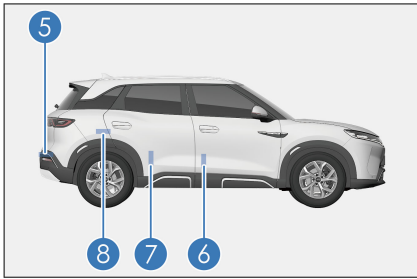

Position of engraved VIN:

VIN is engraved under the front passenger's seat.

After connecting the VDS, Vehicle Identification Number (VIN) can be found in the upper right corner of the screen for the corresponding model. For details, please refer to the VDS operation manual.




Vehicle Nameplate

The vehicle nameplate is located under the right B-pillar.



Model and Serial Number of Drive Motor


- ① The model and serial number of drive motor are attached on the inner panel of the bonnet.
- ② The model and serial number of the drive motor are engraved on the underside of drive motor housing.

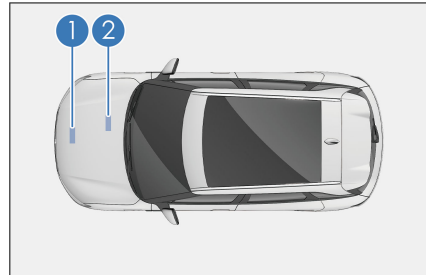

Information

Warning Labels


- ① A/C system and cooling fan label
- ② Battery position label

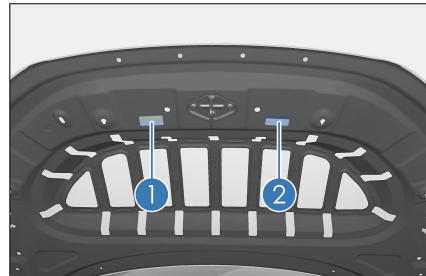

Side airbag warning labels are attached on the lower part of the left and right B-pillars.



The airbag warning label is printed on the front passenger's sun visor.

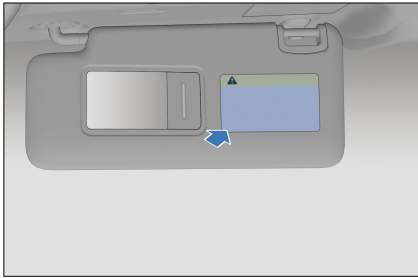


The tyre pressure label is attached below the driver's side B-pillar.



The child protection lock label is engraved on the metal sheet surface on the left/right rear door.





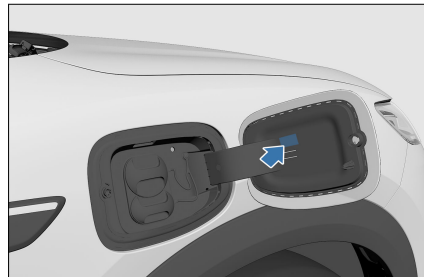

The charging warning label is attached on the inside the cover of the charge port.



Warnings on Strut Mechanisms

Support mechanisms on this vehicle can be dangerous. Do not disassemble or service them yourself. Labels on these products are defined as follows:

Label	Definition
	Warning
	Pressurised cylinder
	Refer to owner's manual

Lable	Definition
	No open flame
	Not to be serviced by users
	Recycle separately (Note: Contact a BYD authorised dealer or service provider.)
	No shaking or cranking

Transponder Mounting

The transponder mounting position is located in the upper left of the front windscreen.



CAUTION

- Do not overlap the sticker transponder with the glass frame or other objects.

Declarations of Conformity

Radio Frequency Statement



The vehicle has different types of radio equipment. The manufacturers of the radio equipment declare that the RF Modules are in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following Internet address: <https://cn-prod.byd.com/eu/eu-doc>.

Component Name	Frequency	Maximum Power
Tire pressure monitoring transmitter module	434 MHz	87 dB μ V/m \pm 2 dB
Interior detection antenna	125 KHz	10 W
Electronic Smart Key	434 MHz	10 dBm
High-frequency module	434 MHz	0.48 W
ECALL GPS antenna	1559 MHz~1605 MHz	0.05 W
ECALL 4G antenna	701 MHz~960 MHz	
	1.71 GHz~2.69 GHz	
NFC device	13.56 MHz	1 W
Bluetooth host	2.402 GHz~2.480 GHz	8 dBm
Wi-Fi hotspot device	2.402 GHz~2.482 GHz	16 dBm
	5.17 GHz~5.835 GHz	
Network communication antenna (4G)	698 MHz~960 MHz	/
	1.71 GHz~2.69 GHz	
	3.3 GHz~3.8 GHz	
	4.4 GHz~5 GHz	
Network communication host (4G)	700~2600 MHz	23 dBm
FM radio antenna amplifier	76MHz~108 MHz	0.24 W
FM radio broadcasting host		0.8 W
DAB antenna amplifier	170 MHz~240 MHz	0.24 W

Component Name	Frequency	Maximum Power
DAB box		1.5 W
Four-in-one antenna (GPS, 4G, WiFi/BT)	1559 MHz~1605 MHz (GPS antenna)	
	698 MHz~960 MHz	
	1.71 GHz~2.69 GHz	
	3.3 GHz~3.8 GHz	0.03 W
	4.4 GHz~5 GHz (4G antenna)	
	2.4 GHz~2.5 GHz (WiFi/BT antenna)	
MmWave Radars	77 GHz~78 GHz	2.5 W
AM antenna amplifier		0.6 W
AM host	522 KHz~1800 KHz	0.8 W

Smart Key Statement



Uzbekistan
Model: D0-92/D1-92



EU countries
Model: D0-92/D1-92



Brazil

Model: D0-92/D1-92

This equipment is not entitled to protection against harmful interference and may not cause interference to duly authorised systems.

MmWave Radars Statement



EU countries

Certificate ID: NB2906.2024.000261



EU R10

Certificate ID: E57*10R06/02*0756

Numerics

12 V Auxiliary Power..... 155

A

A/C Settings..... 150
A/C System Maintenance..... 171
Acoustic Vehicle Alerting System
(AVAS)..... 129
Adaptive Cruise Control (ACC)
System*..... 110
Adjusting the Steering Wheel
Manually..... 60
Airbag Overview..... 14
Anti-theft Alarm System..... 25
Around View Monitor (AVM)*..... 130
Automatic Vehicle Hold (AVH)..... 106
Automatic Vehicle Washing..... 165

B

Blind Spot Assist (BSA)*..... 125
Brake Fluid..... 171
Break-in Period..... 93

C

Cargo Cover..... 157
Carrying Luggage..... 97
Center Console Cubby..... 152
Charging Port Immobiliser System 86
Charging Safety Warnings..... 74
Check Before Charging..... 78
Child Protection Lock..... 53
Child Restraint System Classification
..... 21
Coolant..... 170

D

Data Collection and Processing..... 25
Discharging Device*..... 85

Door Bins..... 152
Driver Monitoring Assistance..... 127
Driving Precautions..... 107
Driving Safety Precautions..... 95
Driving Safety Systems..... 135

E

Electronic Smart Key..... 42
Emergency Lane Keeping Assist
(ELKA)*..... 123
Emergency Shutdown System..... 178
Emergency Vehicle Locking with
Mechanical Key..... 51
Engaging EPB Manually..... 104
EPB Switch..... 104
Exterior Cleaning..... 164

F

Fire Prevention..... 99
Forward Collision Warning (FCW) and
Automatic Emergency Braking (AEB)*
..... 116
Front Interior Lights..... 72
Front Passenger Airbag Switch..... 69
Front Seat Cup Holders..... 153
Function Definition..... 147
Fuses..... 175

G

Gear Shift Controls..... 103
Glove Box..... 152
Grab Handles..... 154

H

Hazard Warning Light Switch..... 70
High-Voltage Battery..... 88

I

If a Tyre Goes Flat.....	182
If Smart Key Battery Is Exhausted	178
If the High-Voltage Battery Leaks.	179
If the Vehicle Needs Towing.....	180
Indicators/Warning Lights.....	31
Infotainment Touchscreen.....	142
Installing Child Restraint Systems.	21
Intelligent Cruise Control (ICC)* ...	114
Intelligent High Beam Control (IHBC)*.....	120
Intelligent Speed Limit Control (ISLC)	119
Interior Cleaning.....	165
Interior Rearview Mirror.....	63

L

Lane Support System (LSS)*.....	121
LCD Instrument Cluster.....	30
Light Switches.....	65
Locking/Unlocking with Mechanical Key.....	47
Low-Voltage Battery.....	91

M

Maintenance Plan.....	160
Maintenance Schedule Requirements	160
Manual Vehicle Washing.....	164

O

Opening and Closing the Hood....	169
Other Instrument Cluster Fault Prompts.....	38

P

Paint Maintenance Tips.....	163
Parking Assist System.....	131

Power Window Switches.....	66
----------------------------	----

R

Regular Maintenance.....	162
--------------------------	-----

S

Saving Energy and Extending Vehicle Service Life.....	96
Scheduled charging.....	84
SD Card Slot.....	154
Seat Belt Overview.....	12
Seat Precautions.....	54
Seatback Pockets.....	153
Self-Maintenance.....	167
Side Mirror Adjustment.....	64
Smart Access and Start System.....	52
Snow Chains.....	109
Specifications.....	188
Starting the Vehicle.....	100
Steering Assist Mode Settings.....	60
Steering Wheel Switches.....	57
Sun Visor.....	153

T

Traffic Sign Recognition (TSR)*	119
Transponder Mounting.....	195
Tyre Pressure Monitoring.....	128
Tyres.....	173

U

USB Ports.....	154
Using Seat Belts.....	12

V

Vehicle Corrosion Prevention.....	163
Vehicle Fire Rescue.....	180
Vehicle Identification.....	192

Vehicle Servicing.....	162
Vehicle Storage Precautions.....	169
Vehicle Use Suggestions.....	95

W

Wading into Water.....	98
Warning Labels.....	193
Washer.....	171
Window Control Switch on Passenger's Side.....	68
Windshield Wipers and Washer.....	60
Wiper Blades.....	172
Wipers.....	62
Wireless Phone Charger*	155

Abbreviations

Terminology	Full Name	Terminology	Full Name
ELR	Emergency Locking Retractor	EDR	Event Data Recorder
EPB	Electronic Parking Brake	AVH	Auto Vehicle Hold
ECU	Electronic Control Unit	ISOFIX	International Standards Organisation Fix
ABS	Antilock Braking System	SPORT	Sport
ECO	Ecology, Conservation, Optimization	MAX	Maximum
NORMAL	Normal	E-Call	Emergency Call
SOC	State of Charge	ACC	Adaptive Cruise Control
ISLC	Intelligent Speed Limit Control	TSR	Traffic Sign Recognition
EPS	Electrical Power Steering	IHBC	Intelligent High Beam Control
ICC	Intelligent Cruise Control	AEB	Automatic Emergency Braking
FCW	Forward Collision Warning	LDA	Lane Departure Assist
LDW	Lane Departure Warning	LDP	Lane Departure Prevention
BSA	Blind Spot Assist	BSD	Blind Spot Detection
RCTA	Rear Collision Traffic Alert	RCTB	Rear Cross Traffic Braking
RCW	Rear Collision Warning	DOW	Door Open Warning
DMS	Driver Monitoring System	TPMS	Tire Pressure Monitoring System
AVM	Around View Monitor	AVAS	Acoustic Vehicle Alerting System
TCS	Traction Control System	MCB	Multi-Collision Brake
MIN	Minimum	ESC	Electronic Stability Controller
VDC	Vehicle Dynamics Control	HHC	Hill Hold Control
HBA	Hydraulic Brake Assist	CDP	Controller Deceleration Parking
HDC	Hill Descent Control	CST	Comfort Parking
VIN	Vehicle Identification Number		

BUILD YOUR DREAMS

Edition date: 07.2025 EN_V1